



AIR, DIRT & MAGNETIC SEPARATOR DISCAL DIRTMAG™

CALEFFI
Hydronic Solutions



Heating & Cooling

Components for today's modern hydronic systems



PCT
INTERNATIONAL
APPLICATION
PENDING

FUNCTIONS AND FEATURES

- DISCAL DIRTMAG™ has 3-in-1 high performance functionality to continuously remove all air and debris, including ferrous and non-ferrous impurities in a sealed hydronic heating and cooling system.
- Microbubble air separation: the widening of the cross section decreases the flow velocity and the internal element facilitates the release of microbubbles.
- Microparticle dirt separation: the internal element separates and collects all the particles in the dirt collection chamber. Collected particles are discharged with the drain valve, while the system is operating.
- Magnetic separation of ferrous impurities: the powerful, external rare earth magnet captures ferrous impurities. Removing the magnetic ring allows for discharging through drain valve even with system operating.

CONNECTIONS



| CODE | CONNECTION |
|---------|-------------|
| 546195A | ¾" sweat |
| 546196A | 1" sweat |
| 546116A | 1" NPT male |
| 546197A | 1 ¼" sweat |

CONNECTIONS




Installation shell fits DISCAL DIRTMAG® 5461 series. Labels included for field installation to externally identify product use.

| CODE | CONNECTION |
|-----------|------------------|
| CBN546002 | Fits ¾", 1", 1¼" |

AIR AND DIRT SEPARATION FERROUS IMPURITIES REMOVAL

The DISCAL DIRTMAG™ air and dirt separator with magnet removes air and both ferrous and non-ferrous impurities continuously with low head loss, featuring a powerful removable external rare-earth magnet around the body. The air discharge capacity is very high, removing all the air present in the system down to microbubble level. After multiple passages of fluid, the DISCAL DIRTMAG™ is able to separate particles down to 5µm (0.2 mil). Ferrous impurities, including magnetite, are trapped inside the large collection chamber by a strong magnetic field created by the magnetic ring positioned on the body below the flow line for fast and effective capture of up to 100% elimination efficiency and discharge through the drain valve without shutting down the system.

CONSTRUCTION

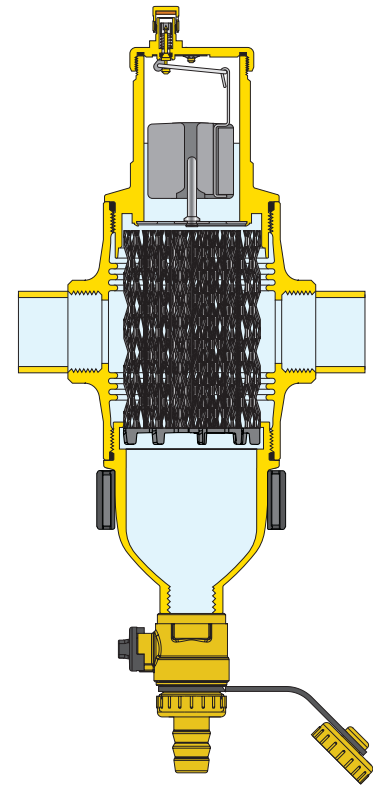


PERFORMANCE

| | |
|---------------------------------------|---------------------------|
| MAX. WORKING PRESSURE | 150 psi |
| WORKING TEMPERATURE RANGE | 32 — 250°F (0-120°C) |
| MAX. GLYCOL: | 50% |
| AIR SEPARATION EFFICIENCY | 100% to microbubble level |
| PARTICLE SEPARATION CAPACITY | 5 µm (0.2 mil) |
| FERROUS IMPURITIES REMOVAL EFFICIENCY | up to 100% |

3D CROSS SECTION



APPLICATION DIAGRAM

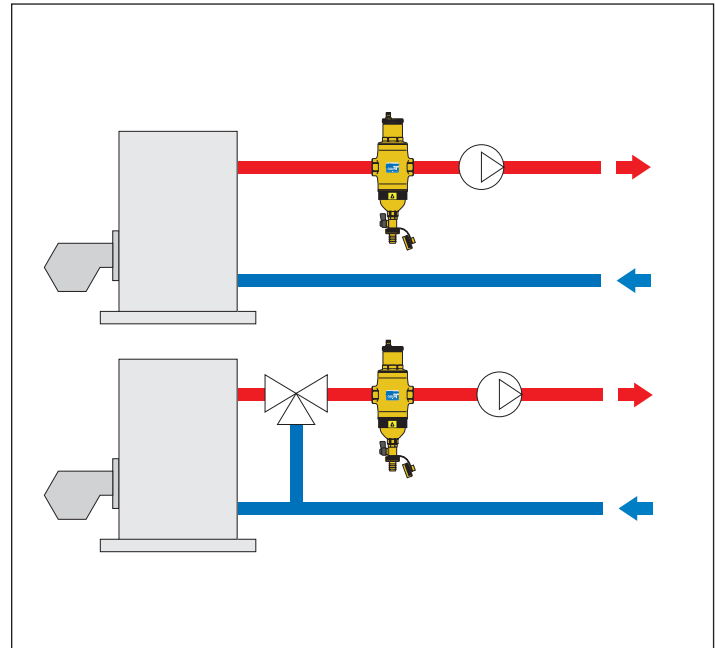

REFERENCE DOCUMENTATION: BROCHURE 01123



CALEFFI
Hydronic Solutions

03555-15NA