


POLYMER INSTRUMENT HOLDER WITH ACCESSORIES

CALEFFI
Hydronic Solutions



Heating

Engineered components for modern systems

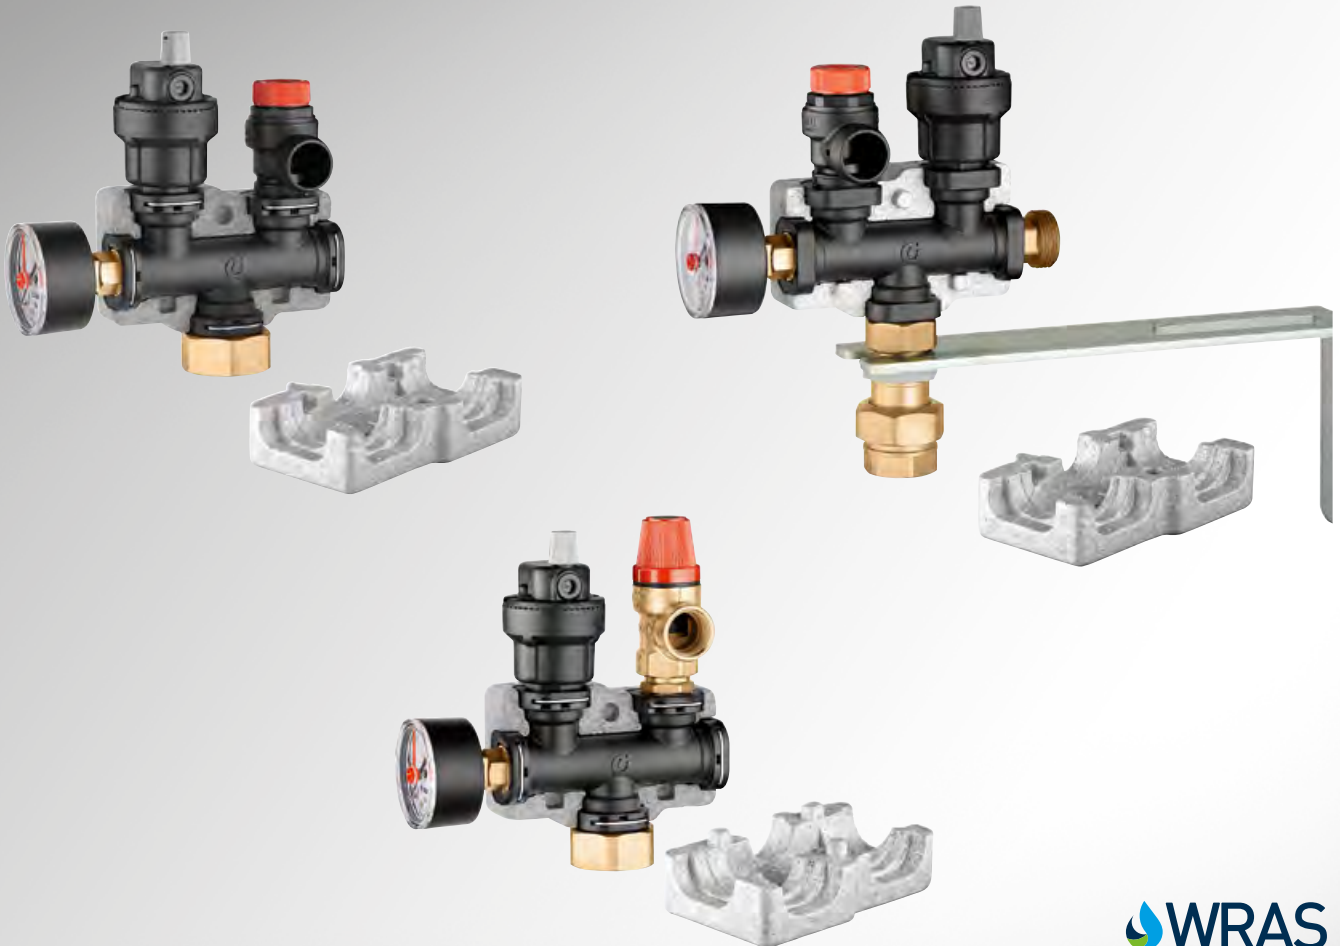

WRAS

FUNCTIONS AND FEATURES

- Safety relief valve, air vent and pressure gauge fitted in the same component.
- Compact manifold for easy installation in reduced spaces.
- Suitable for air-based and geothermal heat pumps.
- Available version with wall mounting bracket and valve for expansion vessel connection.
- Several mounting ways for accessories.
- Complete with insulation.

PRODUCT RANGE




CODE	CONNECTIONS	SETTING	CERTIFICATION
305663	1" F	3 bar	TÜV

CODE	CONNECTIONS	SETTING	CERTIFICATION
305572	3/4" F	2,5 bar	TÜV
305671	1" F	1,8 bar	-
305673	1" F	3 bar	NF
305683	1" F	3 bar	TÜV

CODE	CONNECTIONS	SETTING	CERTIFICATION
305503	3/4" M	3 bar	TÜV

COMPONENTS




- 1 - Air vent
- 2 - Safety relief valve
- 3 - Pressure gauge
- 4 - Polymer manifold

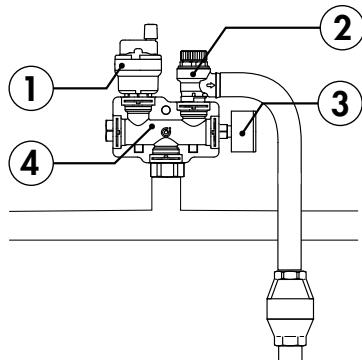

TECHNICAL SPECIFICATIONS

WORKING TEMPERATURE RANGE	5-90°C 110°C max. 5 min. 120°C max. 1 min.
MAX. WORKING PRESSURE	5 bar
MEDIUM	water, glycol solutions
MAX. GLYCOL	50%

APPLICATION DIAGRAMS

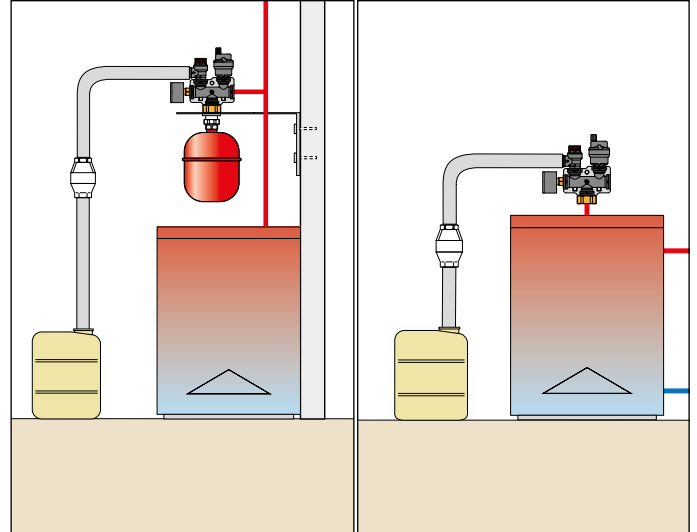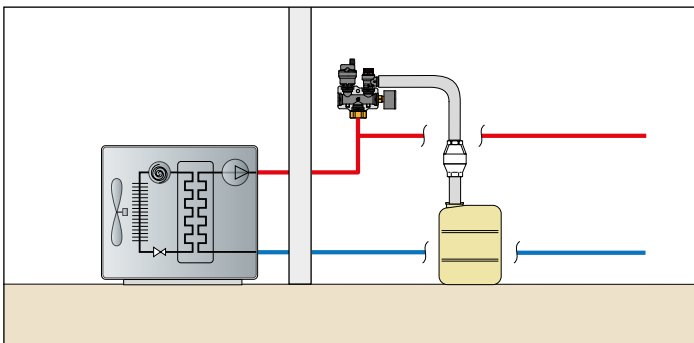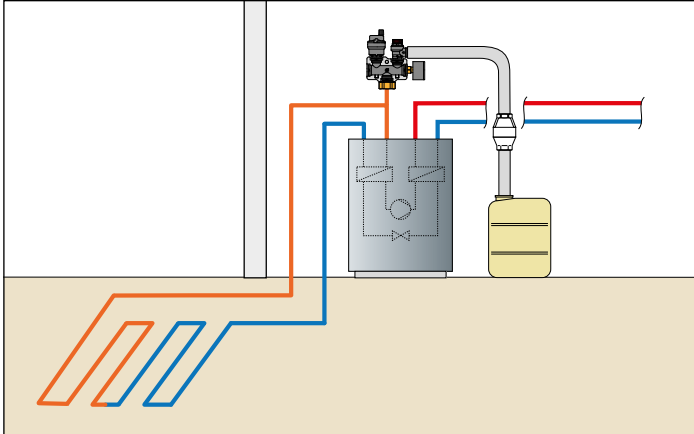

CALEFFI
Hydronic Solutions

0357115GB