


**Dimensions**



**PVC jumper nipple**

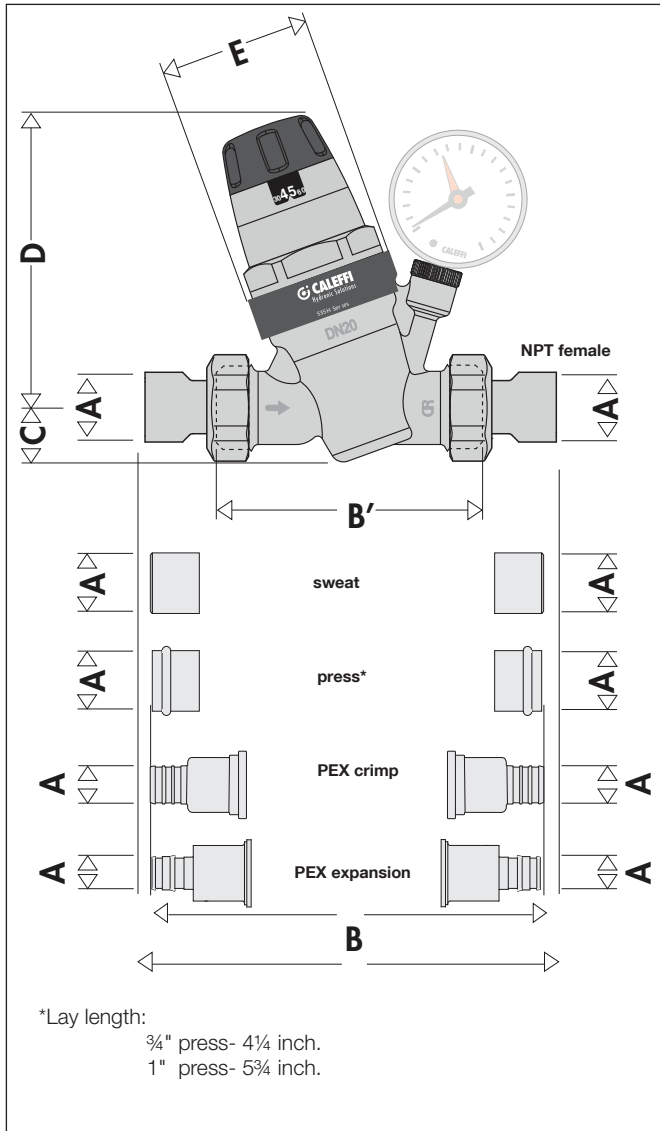

PVC jumper nipple with male union thread. The length of the jumper nipple matches the 535HA series valve body face-to-face dimension (B'), allowing the piping to be completed prior to the installation of valve and permitting quick change out from the jumper to the valve.

Code	Description	Wt (lbs)
NA11304	Jumper nipple for 535HA 1/2" series	0.1
NA11305	Jumper nipple for 535HA 3/4" series	0.1
NA11306	Jumper nipple for 535HA 1" series	0.2
NA11307	Jumper nipple for 535HA 1 1/4" series	0.3
NA11308	Jumper nipple for 535HA 1 1/2" series	0.3
NA11309	Jumper nipple for 535HA 2" series	0.5

Code	A	B	B'	C	D	E	Wt (lb)
535940HA	1/2" swt	5 5/8"	3"	13/16"	4 1/2"	2 3/8"	1.9
535941HA	1/2" swt*	5 5/8"	3"	13/16"	4 1/2"	2 3/8"	2.0
535340HA	1/2" nptf	5 1/2"	3"	13/16"	4 1/2"	2 3/8"	2.0
535341HA	1/2" nptf*	5 1/2"	3"	13/16"	4 1/2"	2 3/8"	2.1
535950HA	3/4" swt	5 5/8"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.2
535951HA	3/4" swt*	5 5/8"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.3
535350HA	3/4" nptf	6 5/16"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.3
535351HA	3/4" nptf*	6 5/16"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.4
535650HA	3/4" press	6 1/4"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.3
535651HA	3/4" press*	6 1/4"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.4
535750HA	3/4" PEX crimp	7"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.3
535751HA	3/4" PEX crimp*	7"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.4
535550HA	3/4" PEX expansion	7 3/4"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.3
535551HA	3/4" PEX expansion*	7 3/4"	3 9/16"	13/16"	4 1/2"	2 3/8"	2.4
535960HA	1" swt	6 7/8"	3 3/4"	13/16"	4 1/2"	2 3/8"	2.9
535961HA	1" swt*	6 7/8"	3 3/4"	13/16"	4 1/2"	2 3/8"	3.0
535360HA	1" nptf	6 7/8"	3 3/4"	13/16"	4 1/2"	2 3/8"	3.0
535361HA	1" nptf*	6 7/8"	3 3/4"	13/16"	4 1/2"	2 3/8"	3.1
535660HA	1" press	7 3/4"	3 3/4"	13/16"	4 1/2"	2 3/8"	3.0
535661HA	1" press*	7 3/4"	3 3/4"	13/16"	4 1/2"	2 3/8"	3.1
535760HA	1" Pex crimp	6 1/4"	3 3/4"	13/16"	4 1/2"	2 3/8"	3.0
535761HA	1" Pex crimp*	6 1/4"	3 3/4"	13/16"	4 1/2"	2 3/8"	3.1
535970HA	1 1/4"swt	6 5/8"	4 5/16"	1-9/16"	7"	3-1/16"	5.6
535971HA	1 1/4"swt*	6 5/8"	4 5/16"	1-9/16"	7"	3-1/16"	5.7
535370HA	1 1/4"nptf	7 7/8"	4 5/16"	1-9/16"	7"	3-1/16"	5.7
535371HA	1 1/4" nptf*	7 7/8"	4 5/16"	1-9/16"	7"	3-1/16"	5.8
535980HA	1 1/2"swt	7 3/4"	4 3/4"	1 1/2"	7"	3-1/16"	7.3
535981HA	1 1/2"swt*	7 3/4"	4 3/4"	1 1/2"	7"	3-1/16"	7.4
535380HA	1 1/2"nptf	8"	4 3/4"	1 1/2"	7"	3-1/16"	7.3
535381HA	1 1/2" nptf*	8"	4 3/4"	1 1/2"	7"	3-1/16"	7.4
535990HA	2"swt	8"	5 1/8"	1 1/2"	7"	3-1/16"	9.7
535991HA	2"swt*	8"	5 1/8"	1 1/2"	7"	3-1/16"	9.8
535390HA	2"nptf	8 3/8"	5 1/8"	1 1/2"	7"	3-1/16"	9.7
535391HA	2"nptf*	8 3/8"	5 1/8"	1 1/2"	7"	3-1/16"	9.8

NOTE:

\*configuration includes factory supplied outlet pressure gauge.