



Dimensions

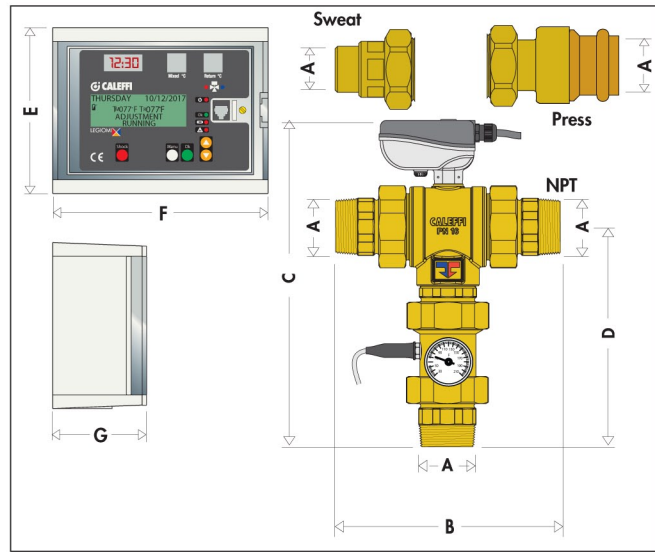

Code	A	B	C	D	E	F	G	Wt (lb)
600064A	1" MNPT	6¼"	11"	6"	5½"	7"	4"	7.3
600069A	1" sweat	4¾"	10¼"	5¼"	5½"	7"	4"	7.3
600066A	1" press	7"	11¾"	6¾"	5½"	7"	4"	7.3
600074A	1¼" MNPT	7¼"	11⅞"	6¼"	5½"	7"	4"	8.2
600079A	1¼" sweat	5¾"	11⅞"	5½"	5½"	7"	4"	8.2
600076A	1¼" press	9¾"	13⅞"	7½"	5½"	7"	4"	8.2
600084A	1½" MNPT	9⅞"	14¾"	9½"	5½"	7"	4"	21.0
600089A	1½" sweat	7⅞"	13⅞"	8¼"	5½"	7"	4"	21.0
600086A	1½" press	10⅞"	14⅞"	10"	5½"	7"	4"	21.0
600094A	2" MNPT	9½"	14½"	7⅝"	5½"	7"	4"	22.0
600099A	2" sweat	8"	13⅞"	6½"	5½"	7"	4"	22.0
600096A	2" press	13¾"	16⅝"	9⅞"	5½"	7"	4"	22.0

For press models,

Lay lengths: size 1"-5½"; size 1¼"-7¾"; size 1½"-7¾"; size 2"-10¼".

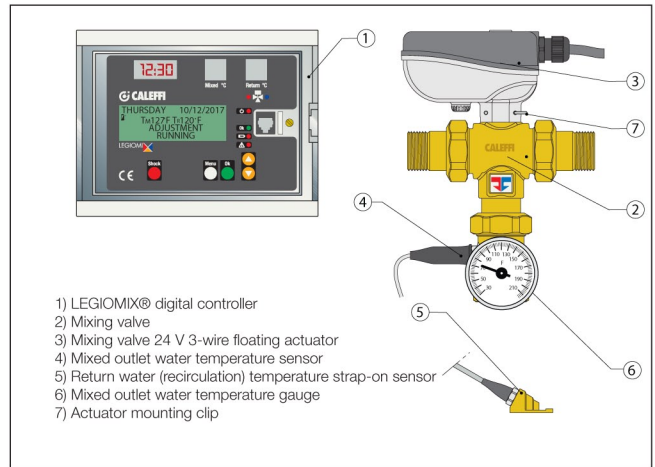

- 1) LEGIOMIX® digital controller
- 2) Mixing valve
- 3) Mixing valve 24 V 3-wire floating actuator
- 4) Mixed outlet water temperature sensor
- 5) Return water (recirculation) temperature strap-on sensor
- 6) Mixed outlet water temperature gauge
- 7) Actuator mounting clip

Package contents

- Digital controller, consisting of housing and base for electric connection
- DIN bar and mounting wall anchors
- Mixing valve
- Actuator
- Mixed outlet water temperature sensor
- Return water temperature strap-on sensor
- Spare fuses
- Installation and commissioning manual