




TERMOSTATSKI RADIJATORSKI VENTILI I NAVIJCI HIGH-STYLE

CALEFFI
Hydronic Solutions

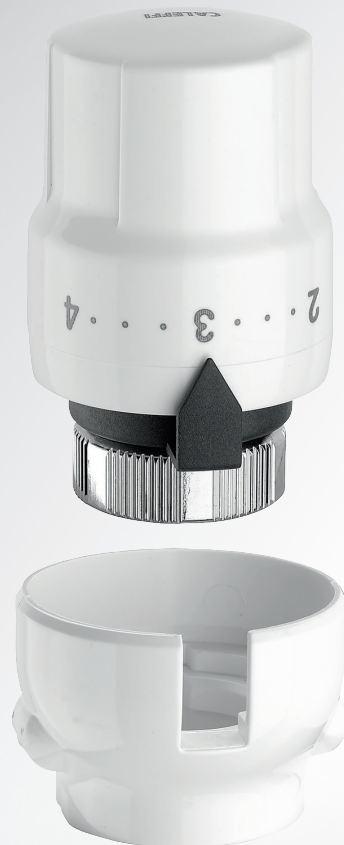

FUNKCIJA - KARAKTERISTIKE

- Sjajno hromiran ili završna obrada bele boje, u skladu sa estetskim zahtevima dekorativnih radijatora.
- Dostupna je ugaona i dvougaona verzija termostatskog ventila sa priključkom na sredini.
- Izmenjivi zavrtnji za ventile i navrtke.
- Opremljen sa ukrasnom rozetom.
- Mogućnost montaže termostatske glave, za automatsko regulisanje temperature u prostoriji na podešenu vrednost.
- Gumena zaptivka.

BELA



ARTIKAL	UGAONI PRIKLJUČCI
400101	1/2" x 23 p. 1,5



ARTIKAL	DVOUGAONI PRIKLJUČCI
400301	1/2" x 23 p. 1,5 (DESNA)
400401	1/2" x 23 p. 1,5 (LEVA)



ARTIKAL	PRIKLJUČCI NA SREDINI
400301	1/2" x 23 p. 1,5 (DESNA)
400401	1/2" x 23 p. 1,5 (LEVA)

GLAVA



ARTIKAL	OPIS
205005	Termostatska glava za bele termostatske ventile



SJAJNO HROMIRANA



ARTIKAL	UGAONI PRIKLJUČCI
400100	1/2" x 23 p. 1,5



ARTIKAL	DVOUGAONI PRIKLJUČCI
400300	1/2" x 23 p. 1,5 (DESNA)
400400	1/2" x 23 p. 1,5 (LEVA)




ARTIKAL	PRIKLJUČCI NA SREDINI
400300	1/2" x 23 p. 1,5 (DESNA)
400400	1/2" x 23 p. 1,5 (LEVA)

GLAVA




ARTIKAL	OPIS
200015	Termostatska glava za sjajno hromirane termostatske ventile




PERFORMANSE

Tmin+Tmax	5÷100°C
MAKSIMALNI RADNI PRITISAK	10 bar
RADNI FLUID	voda, rastvori glikola
MAKSIMALNI PROCENAT GLIKOLA	30%
MAKS. DIFERENCIJALNI PRITISAK SA UGRAĐENOM GLAVOM	1 bar
SKALA REGULACIJE	❄÷5
Tmin+Tmax REGULACIJE	7÷28°C

MONTAŽA SA DESNIM PRIKLJUČKOM

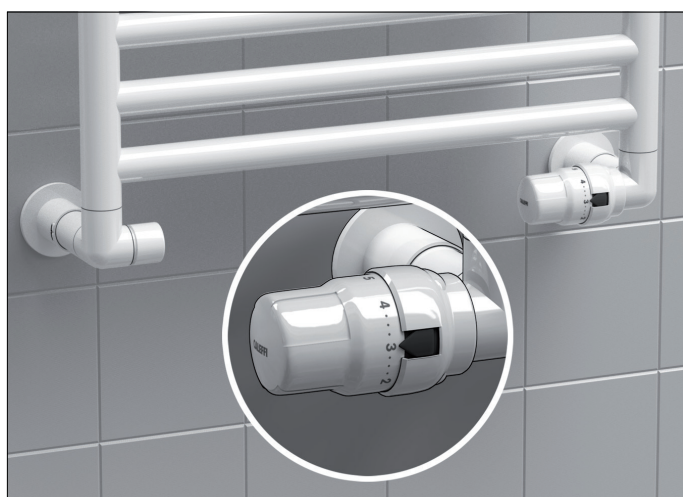

MONTAŽA SA PRIKLJUČKOM NA SREDINI

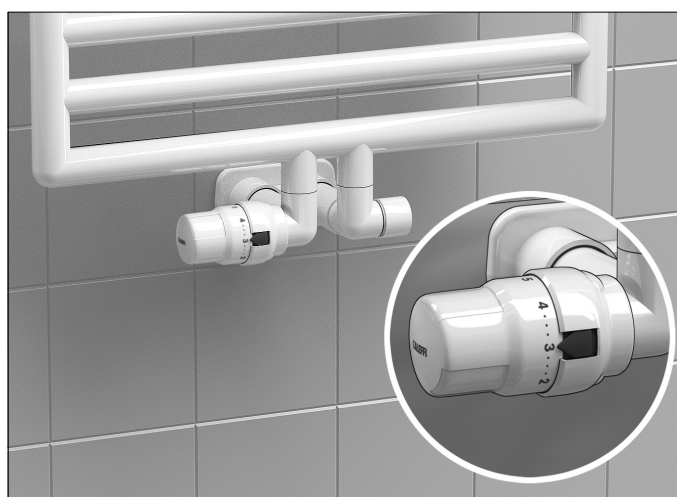

REFERENTNA DOKUMENTACIJA: TEH. DOK. 01140 GB



CALEFFI
Hydronic Solutions

ZADRŽAVAMO PRAVO DA UNESEMO POBOLJŠANJA I IZMENE
NA NAVEDENE OPISANE PROIZVODE I NA TEHNIČKE PODATKE U SVAKOM
TREUTKU BEZ PRETHODNOG OBAVEŠTENJA

CALEFFI HIDROTERMIKA d.o.o. · Predstavništvo
Vojvode Dobrnja 18 · 11000 Beograd · Srbija
tel. +381 11 32 93 540 · fax +381 11 32 93 541
www.caleffi.rs · info@caleffi.rs · © Copyright 2013 Caleffi