




Electronic mixing valve with programmable thermal disinfection Legiomix®

6000 series

www.caleffi.com



- Electronic mixing valve with programmable thermal disinfection and check on disinfection.
- Simple, effective and non-polluting programmable thermal disinfection system.
- Permanent monitoring of recirculation temperature..
- Data registration for creating event logs.
- Easy integration and commissioning in new and renovated installations of all sizes.
- Can be controlled via optional remote interface. Available version with a monitoring and remote control connection with RS-485 and MODBUS-RTU protocols.



CALEFFI
Hydronic Solutions

PRODUCT RANGE

THREADED VERSION



| CODE | CONN. | KV |
|--------|--------|------|
| 600051 | 3/4" | 8,4 |
| 600061 | 1" | 10,6 |
| 600071 | 1 1/4" | 21,2 |
| 600081 | 1 1/2" | 32,5 |
| 600091 | 2" | 41,0 |



FLANGED VERSION




| CODE | CONN. | KV |
|--------|-------|-------|
| 600006 | DN 65 | 90,0 |
| 600008 | DN 80 | 120,0 |



TECHNICAL SPECIFICATIONS

| | |
|--------------------------------|---|
| Electric supply | 230 V - 50/60 Hz - (6,5+6 threaded) (6,5+10 flanged) VA |
| Adjustment temperature range | 20÷85 °C |
| Disinfection temperature range | 40÷85 °C |
| Max. working pressure | 10 bar |
| Protection class | IP 65 (actuator) |
| Max. inlet temperature | 100 °C |

APPLICATION DIAGRAM

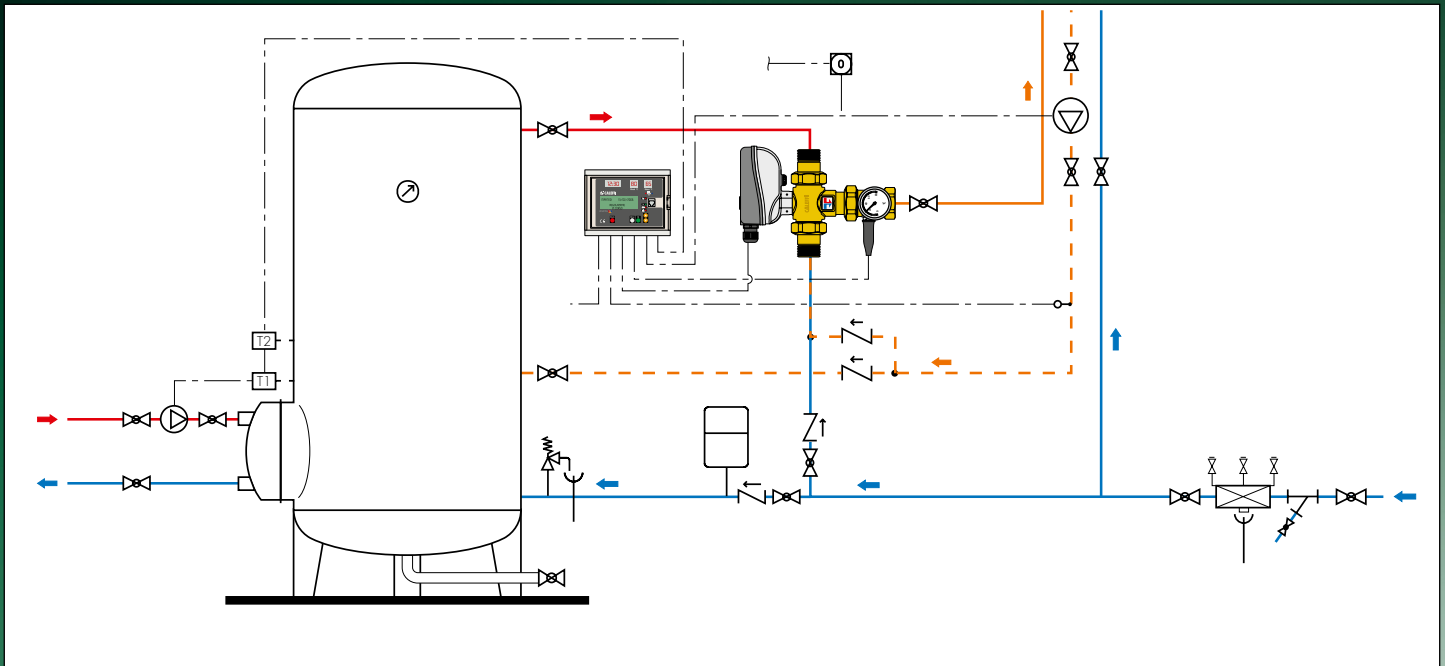

REFERENCE DOCUMENTATION:

6000 series - Technical brochure 01086

CALEFFI
Hydronic Solutions

0353219GB

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi S.p.A. S.R. 229 n. 25 · 28010 Fontaneto d'Agogna (NO) · Italy
Tel. +39 0322 8491 · Fax +39 0322 863723
info@caleffi.com · www.caleffi.com · © Copyright 2019 Caleffi