



COMPACT HEAT INTERFACE UNIT FOR INSTANTANEOUS DHW PRODUCTION

CALEFFI
Hydronic Solutions



Heat systems

Energy management requires accurate measurement



WALL-MOUNTED VERSION - SATK20 SERIES



RECESSED VERSION - SATK50 SERIES

FUNCTIONS - FEATURES

- Ideal for condensing boilers thanks to dynamic control of the thermal load.
- Complete range for low, medium and high temperature systems.
- Compact size in both wall-mounted and recessed versions.
- Instantaneous DHW production with DHW exchanger preheating function.
- Simple installation, use and maintenance.
- Fitted for heat metering.

PRODUCT RANGE - SATK20 SATK50



WALL-MOUNTED VERSION		RECESSED VERSION	
CODE	HEATING RANGE	CODE	HEATING RANGE
SATK20 103HE*	25–45°C	SATK50 103HE*	25–45°C
SATK20 203HE*	45–75°C	SATK50 203HE*	45–75°C
SATK20 303	ON/OFF max. 85°C	SATK50 303	ON/OFF max. 85°C
SATK20 305	ON/OFF max. 85°C	CODE	DESCRIPTION
SATK20 403HE**	ON/OFF max. 85°C	7949 50	Template box for SATK50
SERIES	DIMENSIONS	7945 40	Domestic water template 3/4"
SATK20	450x550x265	SERIES	DIMENSIONS (WITH BOX)
		SATK50	600x700x120



* modulating temperature regulation with compensated set point

** with pump on the primary side

TECHNICAL SPECIFICATIONS

DHW HEAT EXCHANGER NOMINAL CAPACITY	40 kW (65 kW SATK20305)
MAX. DHW TAPPING RATE	18 l/min (27 l/min SATK20305)
DHW CIRCUIT P _{max}	10 bar
PRIMARY CIRCUIT P _{max}	10 bar
MAX. MEDIUM TEMPERATURE	85°C
ELECTRIC SUPPLY - MAX POWER	230 V (ac) - 50 Hz - 80 W (with pump) / 20 W (SATK2030. / SATK50303)
OPTIONAL FUNCTIONS	DHW EXCHANGER PREHEATING FUNCTION
COVER	grey EPP (SATK20) - RAL9010 steel (SATK50)

APPLICATION DIAGRAM

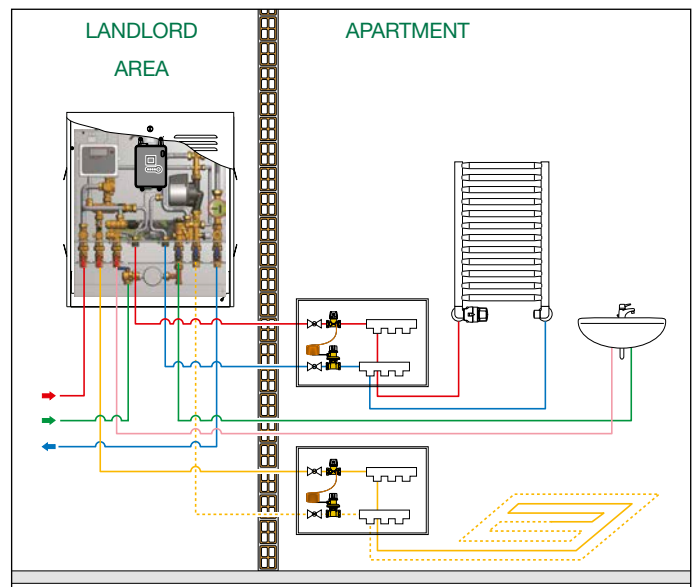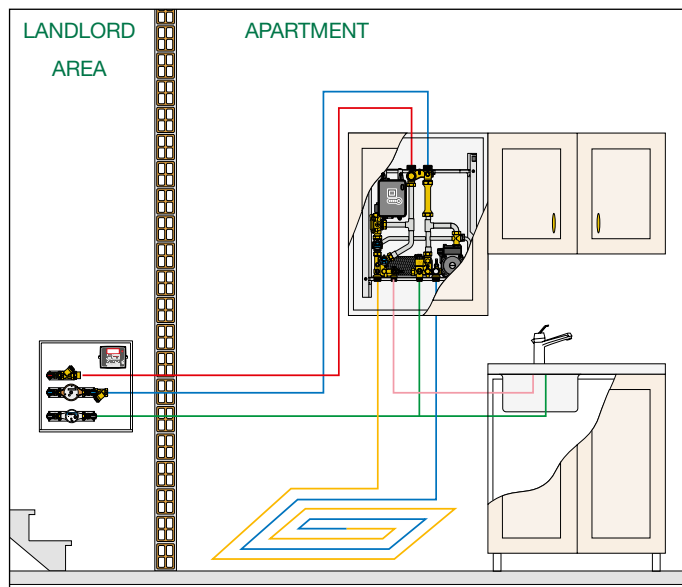

REFERENCE DOCUMENTATION:

SATK20 series - Technical brochure 01209

SATK50 series - Technical brochure 01212



CALEFFI
Hydronic Solutions

0354416GB

WE RESERVE THE RIGHT TO MAKE CHANGES AND IMPROVEMENTS TO THE PRODUCTS AND RELATED DATA IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi S.p.A. S.R. 229 n. 25 · 28010 Fontaneto d'Agogna (NO) · Italy
Tel. +39 0322 8491 · Fax +39 0322 863723
info@caleffi.com · www.caleffi.com · © Copyright 2016 Caleffi