




PresCal™ Compact

COMPACT, DUAL UNION PRESSURE REDUCING VALVE
5332 SERIES

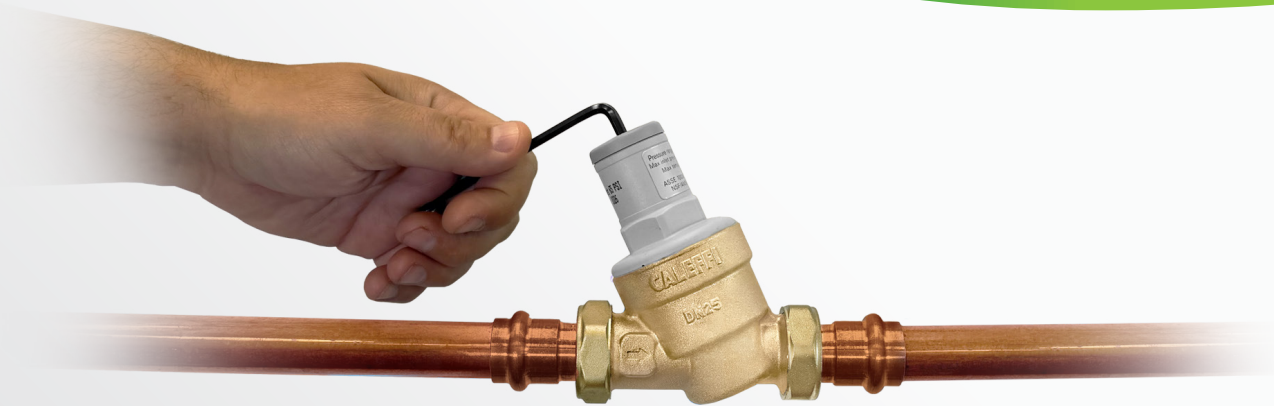

Regulate high water pressure in new homes with our ultra-compact, dual-union pressure reducing valve. It features an easily serviceable one-piece cartridge, five versatile fitting options, and trusted industry certifications. Pre-set to 65 PSI, it accelerates installation, prevents leaks with Posi-Stop technology, and effortlessly fits into the tightest mechanical closets.

PRODUCT FEATURES

-
- | | |
|--|--|
| <p>■ Ultra-Compact Space Saving Design:
Fits into tight mechanical closets or small enclosures, reducing material for complex piping, and allowing for highly flexible, cost efficient installations on every job site.</p> | <p>■ Dual Union Design:
Five interchangeable tailpiece options ensure piping compatibility to the PRV body. Install during rough-in, then easily remove the body to prevent theft or debris damage.</p> |
|--|--|
-
- | | |
|---|---|
| <p>■ Replaceable One-Piece Internal Cartridge:
Simplify maintenance and lower long-term ownership costs. Rapidly service the valve in minutes without removing the body, maximizing overall efficiency and profit margins.</p> | <p>■ Factory Tested and Pre-Set:
Set to 65 psi, ensuring safe residual pressure at the furthest fixture. Reduce commissioning and accelerate installs with less concern for exceeding pressure reduction ratios.</p> |
|---|---|
-
- | | |
|---|--|
| <p>■ Posi-Stop Union Technology:
Stop guessing, start sealing. Our embedded O-ring's in-union connections ensure easy installation and serviceability. A metal-to-metal stop prevents over-tightening and crushed gaskets, guaranteeing perfect seals.</p> | <p>■ Caleffi Reliability & Expert Support:
When you're in the field, you're never alone. Every product is backed by the Caleffi Tech Support Team and our global reputation for engineering excellence.</p> |
|---|--|
-

PRODUCT RANGE - COMPACT, DUAL UNION PRESSURE REDUCING VALVE



NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

ASSE 1003/CSA B356


PRESCAL COMPACT SELECTOR TABLE		
PIPE CONNECTION	SIZE	
	3/4"	1"
NPT FEMALE	533253HA	533263HA
PRESS	533256HA	533266HA
PEX CRIMP	533257HA	533267HA
PEX EXPANSION	533258HA	533268HA
SWEAT	533259HA	533269HA
BODY ONLY; NO TAILPIECES	NA533250HA	NA533260HA




PERFORMANCE

SUITABLE FLUIDS	potable water
MAX. WORKING TEMPERATURE	180 °F (80 °C)
MAX. WORKING PRESSURE	250 psi (17.2 bar)
FACTORY PRESSURE SETTING:	65 psi (4.5 bar)

CONSTRUCTION DETAILS

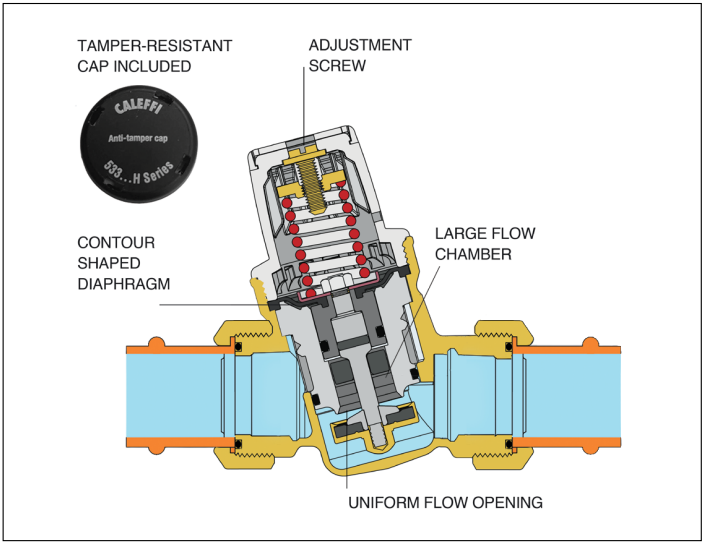

APPLICATION DIAGRAM

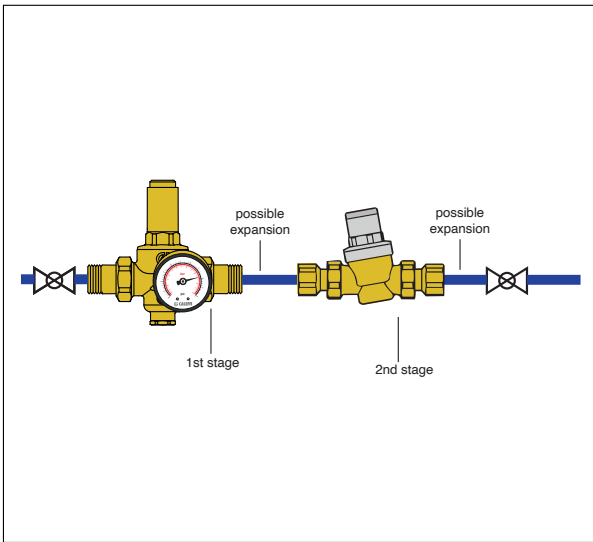

Caleffi Partner:

INNOVATIVE PLUMBING AND HEATING SOLUTIONS
BUILT ON GENERATIONS OF TRUST

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.



Caleffi North America, Inc.
sales@caleffi.com · www.caleffi.com
© Copyright 2026 Caleffi North America, Inc.