

# LIST PRICE CATALOG MARCH 2015



## Installed together 5 year warranty

Install our Z-one™ valve together with our ZVR series Z-one™ Relay and both qualify for our industry exclusive five year warranty.

Z-one™ zone valves have a two year warranty and ZVR - Z-one™ relays have a three year warranty. When installed together, both qualify for our industry exclusive installed together five year warranty.



Heating & Cooling

Components for today's modern hydronic systems

[www.caleffi.com](http://www.caleffi.com) - Milwaukee, WI USA

**CALEFFI**  
Hydronic Solutions

## 1 HYDRAULIC SEPARATION

---

## 2 AIR AND DIRT SEPARATION AND VENTING DEVICES

---

## 3 THERMOSTATIC RADIATOR VALVES AND ACCESSORIES

---

## 4 ZONE VALVES AND RELAYS

---

## 5 TEMPERATURE MIXING STATIONS AND DISTRIBUTION MANIFOLDS

---

## 6 THERMOSTATIC MIXING VALVES FOR DOMESTIC WATER AND HYDRONICS SYSTEMS

---

## 7 AUTOMATIC FILLING UNITS AND BACKFLOW PREVENTERS

---

## 8 BALANCING DEVICES

---

## 9 FITTINGS

---

## 10A SOLAR COMPONENTS

---

## 10B GEOTHERMAL

---

## 10C BIOMASS

---

## 11 HEAT METERS

---

## 12 INDEX


# GENERAL INDEX

Series	Page(s)	Series	Page(s)	Series	Page(s)
110	104,105	546	16,18,20	NA121	72,76,77,83,86, 87,89, 92,93,94,95
111	105	548	5	NA122	31,72,88,99
112	105	549	4	NA123	31,72
120	67	5495	4	NA150	97,98,99,100, 101,114, 115
121	65	551	11,13,14,15,107	NA155	89
127	64	553	60	NA16	39,73
130	66	5599	6	NA163	55
132	68,69,105	561	11,13	NA164	55
142	70	562	22	NA17	45
163	38	573	60	NA254	94
165	38	586	81	NA255	50,85,86,88,89,90
166	39	592	45	NA256	85,88
167	39	594	11	NA257	100
171	40	597	22	NA266	86,87
172	41	598	11,22,73,94	NA267	85,86,87,88
200	24	599	73	NA292	90
201	24	612	77,95	NA314	84
203	24	626	8	NA350	92
209	24	644	36	NA35	92
220	25	656	24,30,48	NA39	7,15,20,105
221	25	659	46	NA475	24
250	90	663	44	NA503	8
251	90,91	668	48	NA510	8,72,88
2521	91	668...S1	42	NA546	17
253	91	669	49	NA5453	19
254	93	675	49	NA5465	20,21
255	85,86	676	30	NA548	5
256	86,87	680	47	NA549	4
257	96,98,100, 101,102,114, 115	681	28	NA551	14,15
259	85	682	28,47	NA553	61,62
280	56,110	687	106	NA59	7,15
281	111	688	8,49,53,54,73	NA605	30,33,97
301	27	691	49	NA61	31
313	95	692	33	NA669	49
314	75	694	7	NA797	101,114
315	74,75	861	105	NA86	106
319	73,75,94	863	106	NAC	78
337	11	940	28	NAL	78
338	26	942	47	NAS100	81,83
339	26	CBN130	66	NAS104	83
342	26	CBN142	70	NAS154	80
343	26	CBN546	18	NAS200	84,107
386	47	CBN551	13	NAS201	84,107
387	25,49	F113	8,49	NAS300	82
413	74,75	F19	55,68,69,105,111	NAT	78
417	74	F29	57,112	R11	77
418	75	F318	75,93	R21	85
437	28	F360	25	R29	91
449	24,27,49	F398	22	R31	73,74,75,77,95
472	24	F411	76	R392	53
501	7,10	F500	7,73,93	R41	7,74,75,93
5020	7,10,49,106	F524	53	R500	74,75,93,95
5021	10	F596	60	R51	74
5022	10	F610	73,93	R530	75
5023	7,10	F670	8,49	R56	22,49
5026	11	F69	49	R59	22
5027	11	NA100	31,53,73,74,75,76, 77, 84,93,94,95,98, 100, 101,107,114	R67	95
5080	11	NA101	60,73,76,77,80, 83,90, 93,95,96,107	R69	49
5081	11	NA102	8,22,28,47,61, 67, 77,81,84,90, 105,106, 107	Z1	32
519	8,39	NA103	28,34,35,47,53,54, 60, 73,81,84,94,107	Z2	33
521	52,53			Z3	33
5213	53			Z4	31
5230	57			Z5	31
5231	54			ZSR	34
5350	61			ZVR	35
538	7,8,18,67,106				



## HYDRAULIC SEPARATION

This diagram is an example

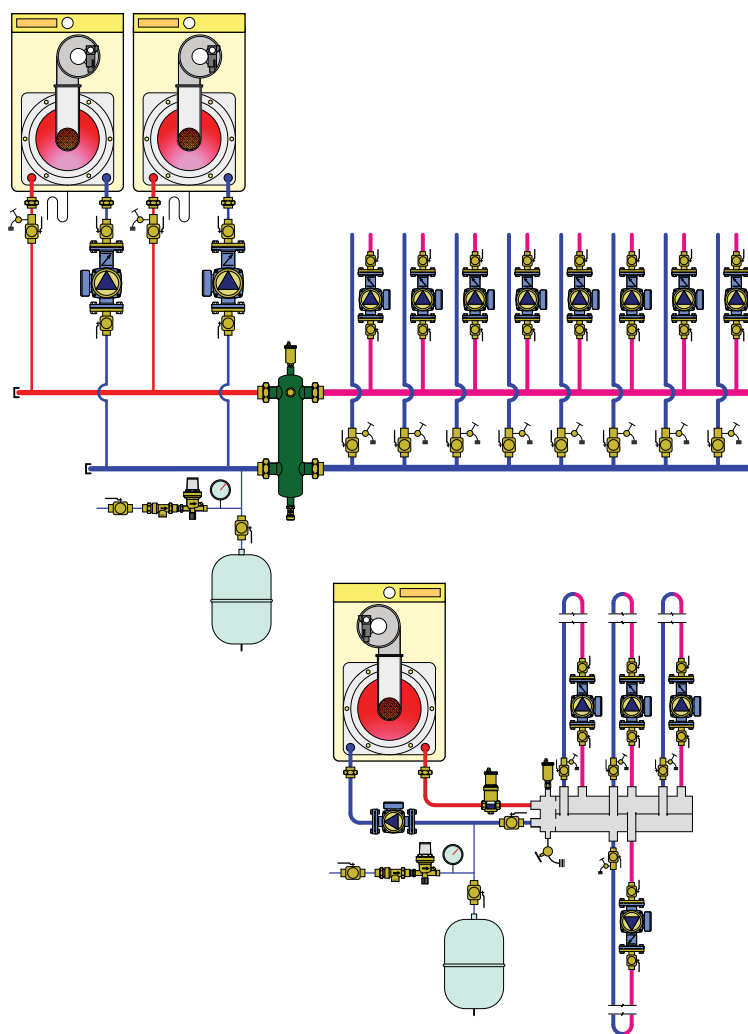

HydroCal™ 3-in-1 hydraulic separators

SEP4™ 4-in-1 hydraulic separators

Hydraulic separators

Hydraulic separators + manifolds

Hydraulic separator accessories

Miscellaneous system components

## 3-IN-1 HYDRAULIC SEPARATORS



### 549 HydroCal™

tech. broch. 01178

Combination 1. air, 2. hydraulic and 3. dirt separation.  
Epoxy resin coated steel body.  
Stainless steel internal coalescing mesh.  
Pre-formed insulation on 2" — 4" sizes.  
Complete with:  
automatic air vent (code 501502A).  
air vent shut-off valve (code NA39589).  
drain valve (code NA39588).  
ANSI 150 flange connections.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32 — 220°F.  
Working temp. w/o insulation: 32 — 270°F.  
Particle separation capacity: to 5 µm (0.2 mil).

Code	Description	Lbs	USD
549052A	2" ANSI flange	73	<b>4,662.00</b>
549062A	2½" ANSI flange	79	<b>4,967.00</b>
549082A	3" ANSI flange	108	<b>6,216.00</b>
549102A	4" ANSI flange	117	<b>6,962.00</b>
Code	Description	Lbs	USD
NA549052A	2" ANSI flange ASME & CRN	73	<b>6,321.00</b>
NA549062A	2½" ANSI flange ASME & CRN	79	<b>6,799.00</b>
NA549082A	3" ANSI flange ASME & CRN	108	<b>8,222.00</b>
NA549102A	4" ANSI flange ASME & CRN	117	<b>8,694.00</b>
NA549150A	6" ANSI flange ASME & CRN*	231	<b>14,732.00</b>

\* without insulation

NA prefix indicates ASME U-stamp tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors; CRN Registered.




### 549 HydroCal™ ASME/CRN

tech. broch. 01178

Combination 1. air, 2. hydraulic and 3. dirt separation.  
Epoxy resin coated steel body.  
Stainless steel internal coalescing mesh.  
Without insulation.  
Complete with:  
automatic air vent (code 501502A).  
air vent shut-off valve (code NA39589).  
drain valve (code NA59600).  
ANSI 150 flange connections.  
Thermometer pockets (NPT):  
½" inlet/outlet flanges, ¾" front center  
Max. working pressure: 150 psi.  
Vessel temperature range: 32 — 270°F.  
Particle separation capacity: to 5 µm (0.2 mil).  
ASME U-stamp tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors; CRN Registered.

Code	Description	Lbs	USD
NA549200A	8" ANSI flange ASME & CRN	520	<b>24,150.00</b>
NA549250A	10" ANSI flange ASME & CRN	730	<b>33,600.00</b>
NA549300A	12" ANSI flange ASME & CRN	1,100	<b>45,000.00</b>

Larger sizes available, consult with factory.

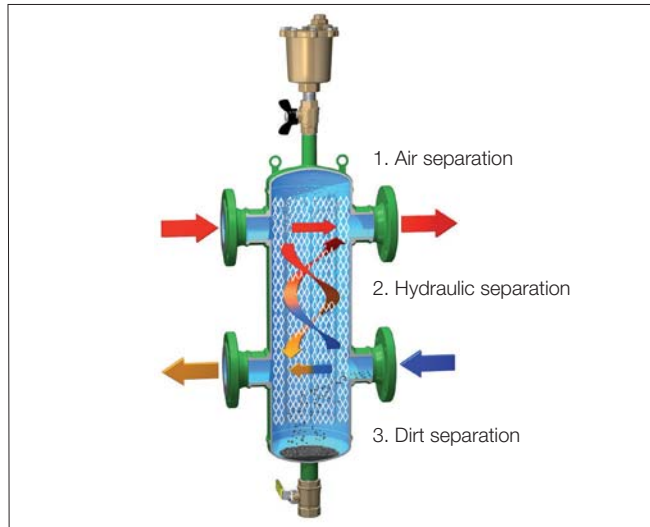

Maximum recommended flow rates in GPM and volume capacity in gallons.

FLOW RATE — FLANGED CONNECTIONS								
Size	2"	2½"	3"	4"	6"	8"	10"	12"
GPM	37	63	96	149	380	625	1030	1650
Gallons	4.0	4.0	8.0	8.0	23	95	175	255

## 4-IN-1 HYDRAULIC SEPARATORS



### 5495 SEP 4™

tech. broch. 01249


Combination 1. air, 2. hydraulic and 3. dirt separation, plus 4. magnetic separation  
Epoxy resin coated steel body.  
HDPE internal coalescing element, removable for cleaning.  
Pre-formed insulation.  
Particle separation capacity: to 5 µm (0.2 mil).  
Magnetic particle separation efficiency 95%.  
Air separation efficiency: 100% to microbubble level.  
Complete with union connections.  
Thermowell tap: 1/2" straight female  
Max. working pressure: 150 psi.  
Working temperature range: 32 — 210°F.  
Working temp. w/o insulation: 32 — 230°F.  
(see page 5 for flow rate information).

Code	Description	Lbs	USD
549596A	1" sweat union	15	<b>1,315.00</b>
549506A	1" NPT F union	15	<b>1,375.00</b>
549597A	1¼" sweat union	19	<b>1,585.00</b>
549507A	1¼" NPT F union	19	<b>1,665.00</b>
549598A	1½" sweat union	27	<b>2,080.00</b>
549508A	1½" NPT F union	27	<b>2,185.00</b>
549599A	2" sweat union	29	<b>2,425.00</b>
549509A	2" NPT F union	29	<b>2,545.00</b>

## HYDRAULIC SEPARATORS




### 548 Hydro Separator

 tech. broch. 01076

Hydraulic separator.  
Epoxy resin coated steel body.  
300 series stainless steel internal baffle.  
Pre-formed insulation.  
Complete with:  
automatic air vent valve (code 502343A).  
service check valve (code 561402A).  
drain valve (code 538402 FD).  
Union connections.  
Thermowell tap: 1/2" straight female  
Max. working pressure: 150 psi.  
Working temperature range: 32—210°F.  
Working temp. w/o insulation: 32—250°F.

Code	Description	Lbs	USD
548006A	1" NPT F union	13	<b>1,063.00</b>
548096A	1" sweat union	13	<b>1,012.00</b>
548007A	1¼" NPT F union	17	<b>1,281.00</b>
548097A	1¼" sweat union	17	<b>1,221.00</b>
548008A	1½" NPT F union	25	<b>1,678.00</b>
548098A	1½" sweat union	25	<b>1,598.00</b>
548009A	2" NPT F union	27	<b>1,958.00</b>
548099A	2" sweat union	27	<b>1,865.00</b>

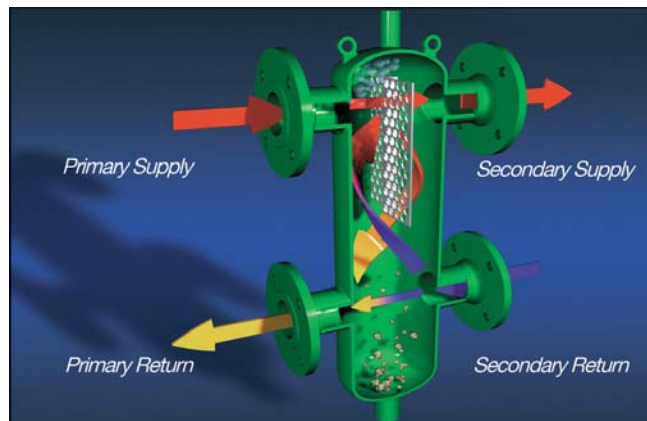

The hydraulic separator creates a zone with a low pressure loss, which enables the primary and secondary circuits connected to it to be hydraulically independent of each other; the flow in one circuit does not interfere with flow in the other.

**Maximum recommended flow rates in GPM and volume capacity in gallons for 548 and 5495 series separators.**

FLOW RATE—UNION CONNECTIONS				
Size	1"	1¼"	1½"	2"
GPM	11	18	26	37
Gallons	0.5	0.7	1.3	3.5

FLOW RATE—FLANGED CONNECTIONS									
Size	2"	2½"	3"	4"	5"	6"	8"	10"	12"
GPM	60	80	124	247	300	484	792	1330	1850
Gallons	4.0	4.0	8.0	8.0	22.5	23	95	175	255



### 548 Hydro Separator

 tech. broch. 01076

Hydraulic separator.  
Epoxy resin coated steel body.  
Pre-formed insulation on 2" — 4" sizes.  
Complete with:  
automatic air vent (code 501502A).  
shut-off valve (code NA39589).  
drain valve (code NA39588).  
ANSI 150 flange connections.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—220°F.  
Vessel temp. w/o insulation: 32—270°F.  
Baffle plates for all sizes: 304SST

Code	Description	Lbs	USD
548052A	2" ANSI flange	75	<b>3,696.00</b>
548062A	2½" ANSI flange	82	<b>3,938.00</b>
548082A	3" ANSI flange	112	<b>4,925.00</b>
548102A	4" ANSI flange	117	<b>5,513.00</b>

Code	Description	Lbs	USD
NA548052A	2" ANSI flange ASME & CRN	75	<b>4,862.00</b>
NA548062A	2½" ANSI flange ASME & CRN	82	<b>5,229.00</b>
NA548082A	3" ANSI flange ASME & CRN	112	<b>6,326.00</b>
NA548102A	4" ANSI flange ASME & CRN	117	<b>6,689.00</b>
NA548120A*	5" ANSI flange ASME & CRN	220	<b>9,345.00</b>
NA548150A*	6" ANSI flange ASME & CRN	231	<b>11,340.00</b>

NA prefix indicates ASME U-stamp tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors; CRN Registered.

\*Without insulation



### 548 Hydro Separator ASME/CRN

 tech. broch. 01076

Hydraulic separator.  
Epoxy resin coated steel body.  
Without insulation.  
Complete with:  
automatic air vent (code 501502A).  
shut-off valve (code NA39589).  
drain valve (code NA59600).  
ANSI 150 flange connections.  
Thermometer pockets (NPT):  
½" inlet/outlet flanges, ¾" front center  
Max. working pressure: 150 psi.  
Working temperature range: 32—270°F.  
ASME U-stamp tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors; CRN Registered.  
Baffle plates for all sizes: 304SST

Code	Description	Lbs	USD
NA548200A	8" ANSI flange ASME & CRN	520	<b>17,850.00</b>
NA548250A	10" ANSI flange ASME & CRN	725	<b>25,200.00</b>
NA548300A	12" ANSI flange ASME & CRN	1,100	<b>30,500.00</b>

Larger sizes available, consult with factory.

## HYDRAULIC SEPARATORS-MANIFOLDS

### 5599 HydroLink™

tech. broch. 01084

Hydraulic separator + distribution manifold. 2+0 with built-in mounting.  
Steel body with pre-formed insulation.  
Complete with automatic air vent (code 502043A) and drain valve (code 538402 FD).  
Max. working pressure: 100 psi.  
Working temperature range: 32—230°F.  
Outlet center dimension: 125 mm.  
Compatible with 165, 166, 167 series HydroMixer™.



Code	Description	Lbs	USD
<b>559920A</b>	1" NPT female + 1" NPT male branches	16	<b>1,195.00</b>

### 5599 HydroLink™

tech. broch. 01084

Hydraulic separator + distribution manifold. 2+2 with angle mounting brackets.  
Steel body with pre-formed insulation.  
Complete with automatic air vent (code 502043A) and drain valve (code 538402 FD).  
Max. working pressure: 100 psi.  
Working temperature range: 32—230°F.  
Outlet center dimension: 125 mm.  
Compatible with 165, 166, 167 series HydroMixer™.



Code	Description	Lbs	USD
<b>559922A</b>	1¼" NPT female + 1" NPT male branches	29	<b>1,468.00</b>

### 5599 HydroLink™

tech. broch. 01084

Hydraulic separator + distribution manifold. 2+1 with built-in mounting.  
Steel body with pre-formed insulation.  
Complete with automatic air vent (code 502043A) and drain valve (code 538402 FD).  
Max. working pressure: 100 psi.  
Working temperature range: 32—230°F.  
Outlet center dimension: 125 mm.  
Compatible with 165, 166, 167 series HydroMixer™.



Code	Description	Lbs	USD
<b>559921A</b>	1" NPT female + 1" NPT male branches	16	<b>1,229.00</b>


### 5599 HydroLink™

tech. broch. 01084

Hydraulic separator + distribution manifold. 3+1 with angle mounting brackets.  
Steel body with pre-formed insulation.  
Complete with automatic air vent (code 502043A) and drain valve (code 538402 FD).  
Max. working pressure: 100 psi.  
Working temperature range: 32—230°F.  
Outlet center dimension: 125 mm.  
Compatible with 165, 166, 167 series HydroMixer™.




Code	Description	Lbs	USD
<b>559931A</b>	1¼" NPT female + 1" NPT male branches	39	<b>1,765.00</b>

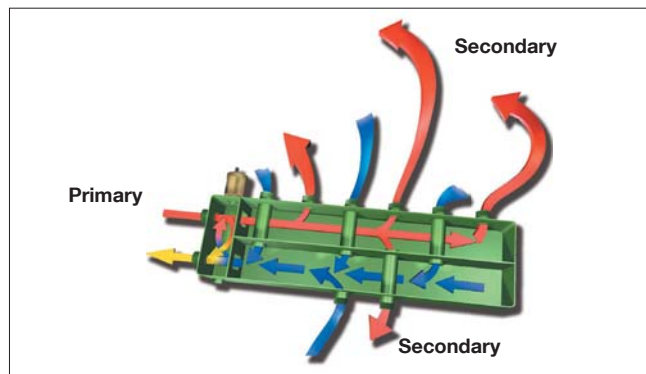

Maximum recommended flow rates at connections:

Branches	Primary	Secondary Total
2+0	9 gpm	22 gpm
2+1	9 gpm	22 gpm
2+2	11 gpm	26 gpm
3+1	11 gpm	26 gpm

Application diagram

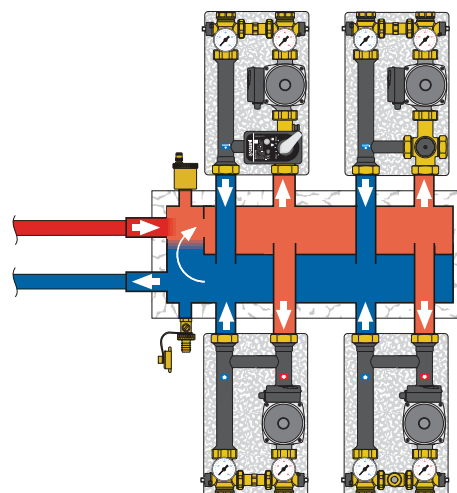

## HYDRAULIC SEPARATOR ACCESSORIES



### 501 MAXCAL®

tech. broch. 01090

Replacement air vent for Hydro Separator 548 and NA548 series and fits HydroCal™ 549 and NA549 series.  
Brass body and cover, stainless steel internal components.  
Extra high discharge capacity.  
Max. working pressure: 230 psi.  
Max. discharge pressure: 90 psi.  
Max. working temperature: 250°F.  
Discharge top thread: 3/8" female.

Code	Description	Lbs	USD
501502A	3/4" NPT female inlet	7	404.30



### 5020 MINICAL®

tech. broch. 01054

Replacement high capacity air vent for 5599 HydroLink™.  
Automatic air vents.  
Brass body.  
Hygroscopic safety air vent cap.  
Max. working pressure: 150 psi  
Max discharge pressure: 60 psi  
Max. working temperature: 250°F.

Code	Description	Lbs	USD
502043A	1/2" NPT male	35	31.90



### 5023 VALCAL®

tech. broch. 01090

Replacement high capacity air vent with service check valve fits Hydro Separator 548 series.  
Brass body.  
Max. working pressure: 150 psi.  
Max. discharge pressure: 60 psi.  
Max. working temperature: 250°F.

Code	Description	Lbs	USD
502343A	1/2" NPT male	5.3	64.70



Replacement drain valve fits Hydro Separator 548 series and HydroLink™ 559 series.  
Brass body.  
3/4" garden hose thread with cap.  
Max. working pressure: 150 psi.  
Max. working temperature: 250°F.

Code	Description	Lbs	USD
538402 FD	1/2" NPT x 3/4" GHT	0.3	19.40



tech. broch. 01076

Drain ball valves fit HydroCal™, Hydro Separators, DISCAL™, DISCALDIRT® and DIRTAL®.  
Brass body.  
Max. working pressure: 150 psi.  
Max. working temperature: 365°F.



Code	Description	Cv	Lbs	USD
NA39589	3/4" NPT female w/T-handle	35	0.6	40.00
NA39753	1" NPT female w/T-handle	50	0.7	54.50
NA39588	1 1/4" NPT female w/Lever	104	1.0	90.80
NA59600	2" NPT female w/Lever	309	3.5	195.50



Temperature pocket well fits 1", 1 1/4" and 1 1/2" Hydro Separator.  
1 3/4" pocket length.  
Inside thread: 20x1.0 mm

Code	Description	Lbs	USD
694045	1/2" straight thread	0.2	24.60
F50055	Sealing washer	0.1	2.10



Double male nipple.

Code	Description	Lbs	USD
R41447	3/4" NPT x 3/4" NPT x 2"	0.3	35.50



## MISCELLANEOUS SYSTEM COMPONENTS



**626**

 tech. broch. 01052

Universal flow switch for heating and air conditioning systems.  
Suitable for 1" to 8" pipe size.  
Working pressure: 150 psi.  
Working temperature range: -20 – 250°F.  
Minimum flow: 5.7 gpm.  
Switch contacts: NO or NC  
Switch rating: 15 A  
CE, cUL, NEMA Type 5, IP 54.



Code	Description	Lbs	USD
<b>626600A</b>	1" NPT male thread	2.3	<b>325.40</b>
<b>626009</b>	Replacement paddle assembly*	0.1	<b>30.50</b>


\* stainless steel



**519**

 tech. broch. 01007

Differential pressure by-pass valve.  
Adjustable from 2 to 10 psi.  
Brass body.  
Max. working pressure: 150 psi.  
Working temperature range: 32 – 230°F.  
· ¾" flow up to 9 gpm.  
· 1" flow up to 40 gpm.  
· 1¼" flow up to 45 gpm.

Code	Description	Lbs	USD
<b>519502A</b>	¾" NPT inlet x ¾" NPT outlet	1.0	<b>168.30</b>
<b>519566A</b>	¾" press x ¾" press 	1.0	<b>178.20</b>
<b>519599A</b>	¾" sweat inlet x ¾" sweat outlet	1.0	<b>166.00</b>
<b>519600A</b>	1" NPT inlet x 1" NPT outlet	1.4	<b>261.10</b>
<b>519609A</b>	1" NPT inlet x 1" sweat outlet	1.4	<b>261.10</b>
<b>519700A</b>	1¼" NPT inlet x 1¼" NPT outlet	1.5	<b>313.40</b>
<b>519709A</b>	1¼" NPT inlet x 1¼" sweat outlet	1.5	<b>313.40</b>



**538**

Boiler drain valve.  
¾" garden hose thread with cap.  
Brass body.  
Max. working pressure: 150 psi.  
Max. working temperature: 250°F.

Code	Description	Lbs	USD
<b>538202 FD</b>	¼" NPT male x ¾" GHT	0.3	<b>19.00</b>
<b>538402 FD</b>	½" NPT male x ¾" GHT	0.3	<b>19.40</b>



**688**

Temperature gauge with well pocket fitting for inserting into manifold ball valves.  
Working temperature range: 30 – 210° F.  
Face dial diameter: 2".

Code	Description	Lbs	USD
<b>688003A</b>	Gauge with pocket well	0.2	<b>50.30</b>
<b>F11344</b>	Replacement pocket well, low-lead	0.1	<b>5.00</b>
<b>F67037</b>	O-ring fits F11344	0.1	<b>1.15</b>



**NA102**

Union with temperature gauge.  
Brass body and fittings.  
Max. working pressure: 150 psi.  
Face dial diameter: 2".  
Dial scale: 30-210° F.

Code	Description	Lbs	USD
<b>NA10295</b>	¾" sweat union	2.2	<b>109.50</b>
<b>NA10296</b>	1" sweat union	2.2	<b>118.50</b>



**NA510**

In-line flow check valve.  
Brass body and fittings.  
Max. percentage of glycol: 50%.  
Max. working pressure: 150 psi.  
Temperature range: 32-250°F.  
Open pressure: 0.29 psi

Code	Description	Cv	Lbs	USD
<b>NA51059</b>	¾" sweat union	12	0.7	<b>74.40</b>
<b>NA51069</b>	1" sweat union	17	1.0	<b>95.00</b>




**NA503**

Tridicator dual pressure / temperature gauge for boilers. Dial size: 3 1/8".  
Pressure range: 0 – 75 PSI.  
Temperature range: 60 – 320 F.  
¼" NPT rear probe.  
For direct fluid stream submersion.

Code	Description	Lbs	USD
<b>NA503040</b>	¼" NPT	0.2	<b>44.60</b>

This diagram is an example

2

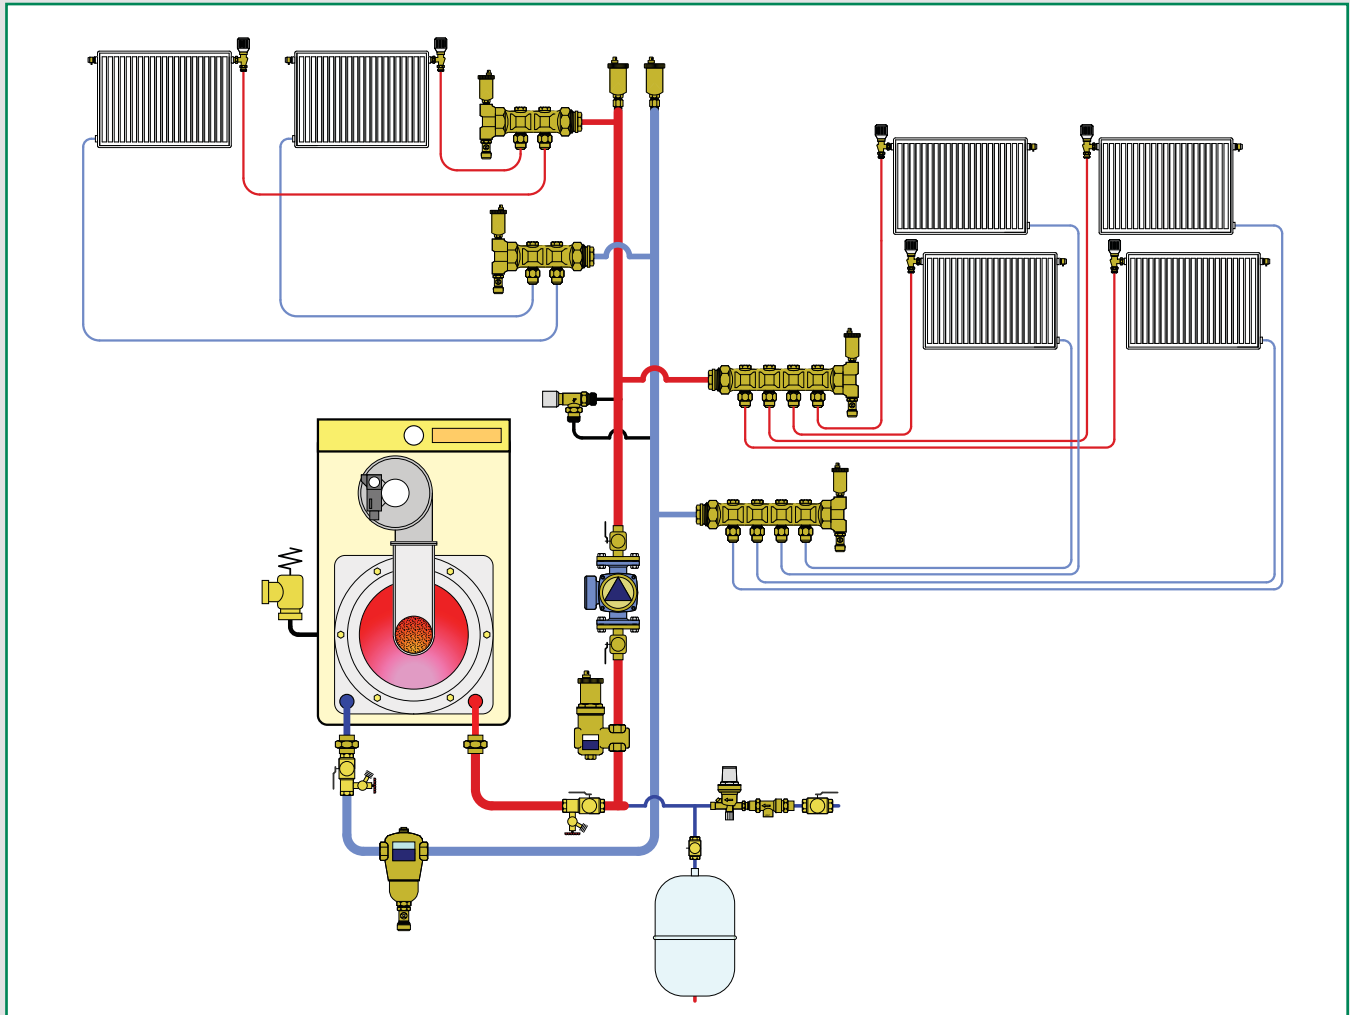

Automatic air vents, MINICAL®

Manual air vents

Dirt separators, DIRTICAL®

Magnetic dirt separators, DIRTMAG®

Dirt separators for commercial applications, DIRTICAL®

High discharge automatic air vent, DISCALAIR®

Air separators, DISCAL®

Air separators for commercial applications, DISCAL®

Air and dirt separators, DISCALDIRT®

Air and magnetic dirt separators, DISCALDIRTMAG®

Accessories for air and dirt separators

## AUTOMATIC AND MANUAL AIR VENTS


Automatic air vents are designed to remove the air that accumulates in heating and cooling systems without the need for manual intervention. This prevents harmful air that may compromise the life and the performance of the system which includes:

- corrosion due to the oxygen;
- pockets of air trapped in the heating emitters;
- cavitation in the circulation pumps;
- noise from air passing through the pipes.

The accumulation of air bubbles in the air vent body causes the float to drop and thus the vent valve to open. The air vent functions correctly, as long as the water pressure remains below the maximum discharge pressure.

### MAXCAL®

Extra high capacity air vent is ideal for use in large piping systems and can also be installed in horizontal piping. The valve body and cover are made of forged brass while the filter, valve stem, float and spring are all made of stainless steel to prevent the formation of rust.



### 501 MAXCAL®

[tech. broch. 01090](#)

Automatic air vent for heating and air conditioning. Brass body and cover, stainless steel internal components. Extra high discharge capacity.  
 Max. working pressure: 230 psi.  
 Max. discharge pressure: 90 psi.  
 Max. discharge rate: 9 SCFM.  
 Working temperature range: -4 – 250°F.  
 Discharge top thread: 3/8" female.



Code	Description	Lbs	USD
501502A	3/4" NPT female	7	404.30

### MINICAL® and VALCAL®

These float type automatic air vents are designed to vent released air from the water while being heated. They are used on manifolds or pipes in sealed heating systems.


MINICAL® is a standard size air vent that will discharge up to 1.75 SCFM.

VALCAL® is a high capacity larger size air vent that will discharge up to 2.5 SCFM.



Some MINICAL® and VALCAL® models are equipped with a hygroscopic safety cap. Cellulose fibre discs serve as the redundant vent seal which their volume increases by 50% when they become wet which cause the discharge vent to close.

Some MINICAL® and VALCAL® models are equipped with a service check valve which facilitates maintenance operations by shutting off the water flow when the air vent is removed and also allows an easy replacement of air vent without purging the system.



### 5020 MINICAL®

[tech. broch. 01054](#)

Automatic air vent.  
 Brass body.  
 Max. working pressure: 150 psi.  
 Max. discharge pressure: 40 psi.  
 Max. discharge rate: 1.75 SCFM.  
 Max. working temperature: 250°F.

Code	Description	Lbs	USD
502015A	1/8" NPT male	0.4	22.60



### 5021 MINICAL®

[tech. broch. 01054](#)

Automatic air vent with service check valve.  
 Brass body.  
 Max. working pressure: 150 psi.  
 Max. discharge pressure: 40 psi.  
 Max. discharge rate: 1.75 SCFM.  
 Max. working temperature: 230°F.

Code	Description	Lbs	USD
502115A	1/8" NPT male	0.4	30.50



### 5020 MINICAL®

[tech. broch. 01054](#)

Automatic air vents.  
 Brass body.  
 Hygroscopic safety air vent cap.  
 Max. working pressure: 150 psi.  
 Max discharge pressure: 60 psi.  
 Max. discharge rate: 1.75 SCFM.  
 Max. working temperature: 250°F.

Code	Description	Lbs	USD
502043A	1/2" NPT male	0.6	31.90



### 5022 VALCAL®

[tech. broch. 01090](#)

High discharge automatic air vent.  
 Brass body.  
 Max. working pressure: 150 psi.  
 Max. discharge pressure: 60 psi.  
 Max. discharge rate: 2.5 SCFM.  
 Max. working temperature: 250°F.

Code	Description	Lbs	USD
502243A	1/2" NPT male	0.5	54.80



### 5023 VALCAL®

[tech. broch. 01090](#)

High discharge vent with service check.  
 Brass body.  
 Max. working pressure: 150 psi.  
 Max. discharge pressure: 60 psi.  
 Max. discharge rate: 2.5 SCFM.  
 Max. working temperature: 250°F.

Code	Description	Lbs	USD
502343A	1/2" NPT male	0.5	64.70




## AUTOMATIC AND MANUAL AIR VENTS



### 5026

Automatic air vent.  
Brass body.  
Max. working pressure: 150 psi.  
Max. discharge pressure: 90 psi.  
Max. discharge rate: 1.75 SCFM.  
Max. working temperature: 240°F.

Automatic radiator air vent valve is designed to remove any air trapped inside the heat emitters both during the filling of the system and in normal operation. The automatic air discharge happens when the hygroscopic cellulose fibre discs are dry. As air is vented and water contacts the hygroscopic discs, they increase their volume by 50% which cause the discharge vent to close.



Code	Description	Lbs	USD
<b>502610A</b>	1/8" NPT male	0.6	<b>20.30</b>
<b>502620A</b>	1/4" NPT male	0.6	<b>21.20</b>
<b>502640</b>	1/2" straight thread	1.0	<b>30.50</b>



### 5027

Automatic air vent with service check valve.  
Brass body.  
Max. working pressure: 150 psi.  
Max. discharge pressure: 90 psi.  
Max. discharge rate: 1.75 SCFM.  
Max. working temperature: 240°F.



### 5080

Automatic hygroscopic air vent for hydronic heating system and low pressure steam. Manual operation by rotating knob. Chrome plated brass body.  
Max. working pressure: 150 psi.  
Max. working temperature: 212°F.  
Low pressure steam: 15 psi.  
(Priced each, sold in package of 25 each)

Code	Description	Lbs	USD
<b>508013A</b>	1/8" NPT male	0.5	<b>11.10</b>

Code	Description	Lbs	USD
<b>502710A</b>	1/8" NPT male	0.6	<b>28.10</b>
<b>502720A</b>	1/4" NPT male	0.6	<b>29.70</b>



Service check valve for removal of air vent or expansion tank without purging system. Fits automatic air vents 502 series.  
Max. working pressure: 150 psi.  
Max. working temperature: 250°F.



### 5081

Replacement hygroscopic cartridge fits hygroscopic air vent 5080 series.  
(Priced each, sold in package of 25 each)

Code	Description	Lbs	USD
<b>508100A</b>	Cartridge	0.4	<b>9.60</b>

Code	Description	Lbs	USD
<b>59474A</b>	1/8" NPT male	0.1	<b>15.80</b>
<b>59804A</b>	1/4" NPT male	0.1	<b>16.90</b>
<b>561402A</b>	1/2" NPT male	0.2	<b>19.50</b>



### 551 DISCALAIR®

High discharge automatic air vent.  
Brass body.  
Stainless steel float guide pin and linkage.  
Max. working pressure: 150 psi.  
Max. discharge pressure: 90 psi.  
Max. discharge rate: 4.5 SCFM.  
Max. working temperature: 250°F.



### 337

Manual air vent with metal seal and adjustable outlet.  
Brass body.  
Max. working pressure: 150 psi.  
Max. working temperature: 212°F.

Code	Description	Lbs	USD
<b>337221A</b>	1/4" NPT male	0.1	<b>13.70</b>

Code	Description	Lbs	USD
<b>551004A</b>	1/2" NPT female	0.8	<b>124.60</b>


## AIR SEPARATORS

The DISCAL® air separator is used to continuously remove the air contained in hydronic circuits of heating and cooling systems. The air discharge capacity is very high. They automatically remove all the air present in the system down to micro-bubble level with low head loss due to the special internal shape of the separator body. Flow direction of the DISCAL® air separator is bidirectional; flow in either direction is permitted.

### Air separation efficiency


DISCAL® air separators continuously remove entrained air in hydronic systems with very high separation efficiency. The amount of air removed from a system varies depending on fluid velocity and temperature. As illustrated on the graph below, at the 4.0 feet per second fluid velocity, all the air artificially introduced into the circuit is eliminated by the DISCAL® air separator.

Any small amount which remains is then gradually eliminated during normal system operation. In conditions where the fluid velocity is slower or the temperature of the fluid is higher, the amount of air separated is even greater.

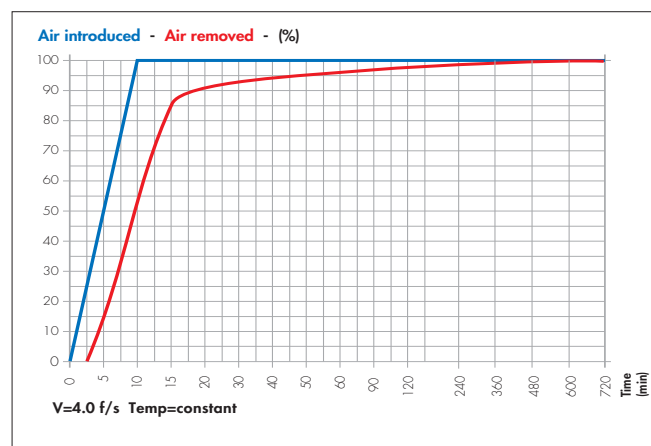

### Construction details

The air separator uses the combined action of several physical principles. The active part consists of an assembly of concentric mesh surfaces (1). These elements create the whirling movement required to facilitate the release of microbubbles and their adhesion to these surfaces. The bubbles, fusing with each other, increase in size until the hydrostatic thrust overcomes the adhesion force to the mesh. They rise towards the top of the unit from which they are released through a float-operated automatic air vent, with stainless steel float guide pin (3) which keeps the float from binding.

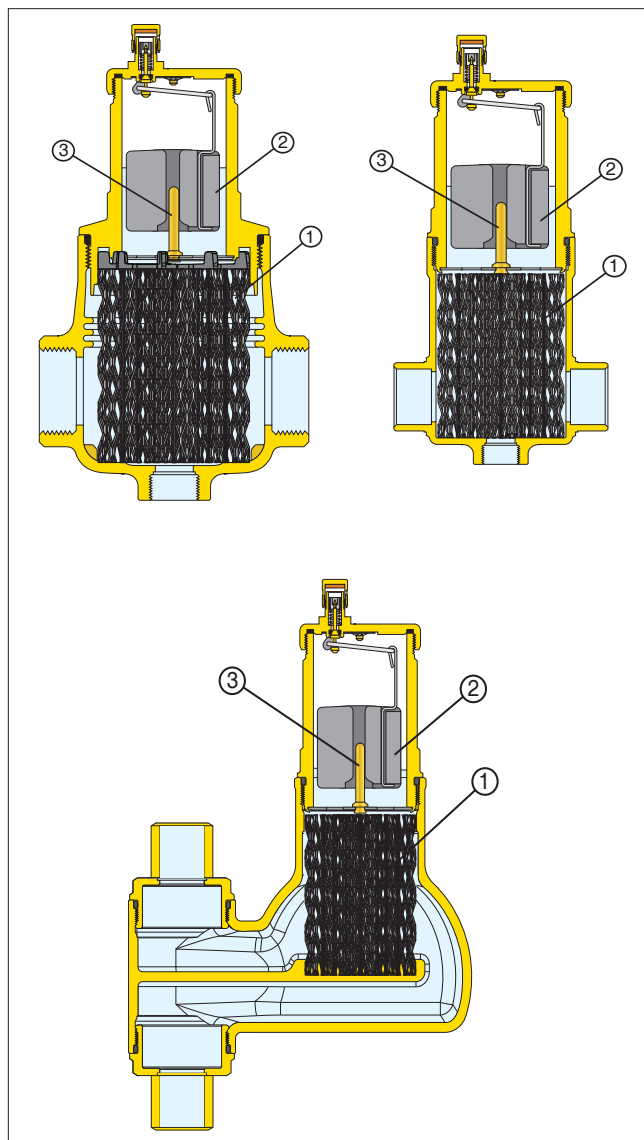

## AIR SEPARATORS



### 551 DISCAL® Sweat

tech. broch. 01060

Air separator.  
Brass body.  
Stainless steel float guide pin and linkage.  
Glass reinforced nylon internal element.  
½" NPT female bottom thread.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.

Code	Description	Lbs	USD
551028A	1" sweat	3.7	<b>274.70</b>
551035A	1¼" sweat	3.7	<b>401.00</b>
551041A	1½" sweat	4.9	<b>522.00</b>
551054A	2" sweat	5.5	<b>637.00</b>



### 551 DISCAL® NPT

tech. broch. 01060

Air separator.  
Brass body.  
Stainless steel float guide pin and linkage.  
Glass reinforced nylon internal element.  
½" NPT female bottom thread.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.

Code	Description	Lbs	USD
551005A	¾" NPT female	3.7	<b>261.00</b>
551006A	1" NPT female	3.7	<b>288.30</b>
551007A	1¼" NPT female	4.9	<b>421.10</b>
551008A	1½" NPT female	4.9	<b>548.00</b>
551009A	2" NPT female	5.5	<b>669.00</b>



### 551 DISCAL® Sweat

tech. broch. 01060

Air separator with ½" service check valve (code 561402A) to mount expansion tank on bottom thread.  
Brass body.  
Stainless steel float guide pin and linkage.  
Glass reinforced nylon internal element.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.

Code	Description	Lbs	USD
551028AC	1" sweat	3.8	<b>284.50</b>
551035AC	1¼" sweat	3.8	<b>410.80</b>
551041AC	1½" sweat	5.0	<b>531.80</b>
551054AC	2" sweat	5.6	<b>646.80</b>



### 551 DISCAL® NPT

tech. broch. 01060

Air separator with automatic ½" check valve (code 561402A) to mount expansion tank on bottom thread.  
Brass body.  
Stainless steel float guide pin and linkage.  
Glass reinforced nylon internal element.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.

Code	Description	Lbs	USD
551005AC	¾" NPT female	3.8	<b>270.80</b>
551006AC	1" NPT female	3.8	<b>298.10</b>
551007AC	1¼" NPT female	5.0	<b>430.90</b>
551008AC	1½" NPT female	5.0	<b>557.80</b>
551009AC	2" NPT female	5.6	<b>678.80</b>



tech. broch. 01060

Service check valve for easy replacement of expansion tank when connected to bottom of DISCAL®.

Code	Description	Lbs	USD
561402A	½" NPT male x ½" NPT female	0.2	<b>19.50</b>

		FLOW RATE				
	Size	¾"	1"	1¼"	1½"	2"
4.0 f/s	GPM	6	9	15	24	36
10.0 f/s	GPM	19	22	36	57	66
	Cv	19	32	56	73	81



Insulation shell fits DISCAL® 551 series.

Code	Description	Lbs	USD
CBN551005	Fits ¾" and 1" 551 series	0.1	<b>73.50</b>
CBN551007	Fits 1¼", 1½" 551 series	0.1	<b>78.80</b>
CBN551009	Fits 2" 551 series	0.1	<b>86.10</b>

\*Will not fit the ¾" compact DISCAL® codes 551003A and 551022A.

## AIR SEPARATORS



### 551 DISCAL® Compact

tech. broch. 01060

Air separator.  
Brass body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
½" NPT bottom thread.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.

Code	Description	Lbs	USD
551003A	¾" NPT female	2.0	157.90
551022A	¾" sweat	2.0	152.40



### 551 DISCAL® Compact

tech. broch. 01060

Air separator with ½" service check valve to mount expansion tank on bottom thread.  
Brass body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.

Code	Description	Lbs	USD
551003AC	¾" NPT female	2.1	167.70
551022AC	¾" sweat	2.1	162.20




### 551 DISCAL® Vertical

tech. broch. 01060

Air separator for vertical pipes.  
Brass body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.


Code	Description	Lbs	USD
NA551995	¾" sweat	4.5	337.30
NA551996	1" sweat	4.5	372.60

The DISCAL® air separator uses a coalescing element that consists of an element of concentric diamond pattern mesh surfaces. This element creates the whirling movement required to facilitate the release of micro-bubbles and their adhesion to these surfaces. The bubbles, fusing with each other, increase in volume until the buoyancy force overcomes the adhesion force to the surface. They rise to the top of the unit from where they are released through a float-operated automatic air release valve.

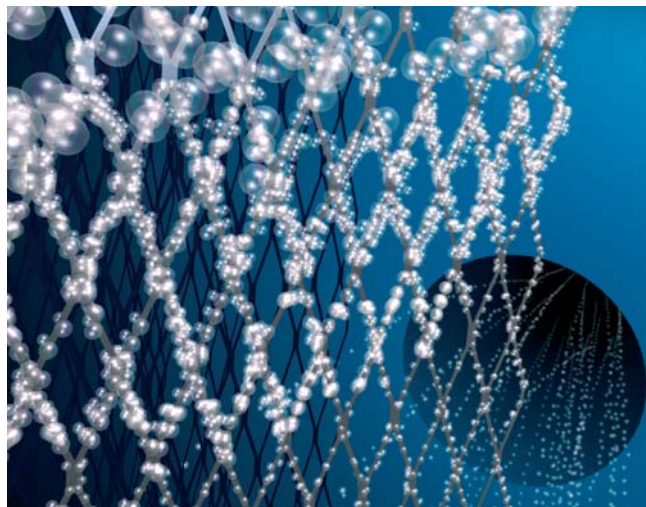

#### Air separation efficiency

DISCAL® air separators continuously remove entrained air in hydronic systems with very high separation efficiency. The amount of air removed from a system varies depending on fluid velocity and temperature. As illustrated on the graph, at the 4.0 feet per second fluid velocity, all the air artificially introduced into the system is gradually eliminated during normal system operation by the DISCAL® air separator. In conditions where the fluid velocity is slower or the temperature of the fluid is higher, the amount of air separated is even faster.

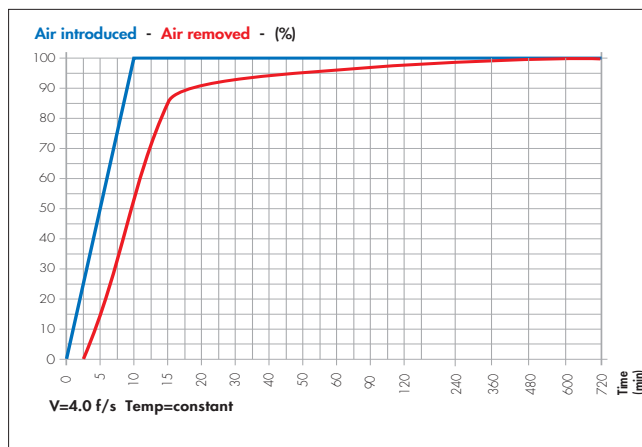

		FLOW RATE		
	Size	¾" compact	¾" vertical	1" vertical
4.0 f/s	GPM	6	9	9
	Cv	12	19	19
10.0 f/s	GPM	14	20	20
	Cv	12	19	19

## AIR SEPARATORS



### 551 DISCAL®

tech. broch. 01060

Air separator.  
Epoxy resin coated steel body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
ANSI 150 flange connections.  
1" NPT male drain thread.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.



### NA551 DISCAL® ASME/CRN

tech. broch. 01060


Air separator.  
Epoxy resin coated steel body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
ANSI 150 flange connections.  
1" NPT male drain connection.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
ASME and CRN Registered.

Code	Description	Lbs	USD
<b>551050A</b>	2" ANSI flange	34	<b>2,875.00</b>
<b>551060A</b>	2½" ANSI flange	35	<b>3,074.00</b>
<b>551080A</b>	3" ANSI flange	62	<b>4,069.00</b>
<b>551100A</b>	4" ANSI flange	67	<b>4,552.00</b>
<b>551120A</b>	5" ANSI flange	106	<b>6,625.00</b>
<b>551150A</b>	6" ANSI flange	117	<b>8,536.00</b>

#### Air separator construction

DISCAL® air separators are constructed to allow maintenance and cleaning operations to be carried out without having to remove the separator body from the pipe work. All DISCAL® air separator have a bottom connection for installing a drain valve. All internal air release control components are fully accessible. The automatic air release valve, located at the top of the separator, has a long chamber for the movement of the float. This feature prevents any debris present in the water from reaching the sealing seat.

Flanged models include a side drain vent to release large amounts of air when filling the system and to remove any debris present above the water level.

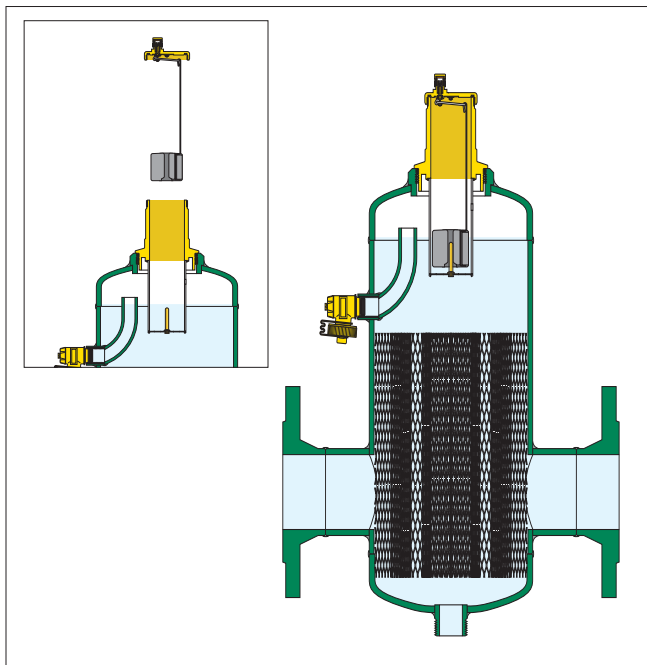

Code	Description	Lbs	USD
<b>NA551050A</b>	2" ANSI flange ASME & CRN	34	<b>3,514.00</b>
<b>NA551060A</b>	2½" ANSI flange ASME & CRN	35	<b>3,757.00</b>
<b>NA551080A</b>	3" ANSI flange ASME & CRN	62	<b>4,973.00</b>
<b>NA551100A</b>	4" ANSI flange ASME & CRN	67	<b>5,564.00</b>
<b>NA551120A</b>	5" ANSI flange ASME & CRN	106	<b>8,097.00</b>
<b>NA551150A</b>	6" ANSI flange ASME & CRN	117	<b>10,433.00</b>

NA prefix indicates ASME tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors; CRN Registered.



Optional drain ball valve.  
Fits DISCAL® series.  
Brass body.  
Tee handle.  
Max. working pressure: 150 psi.  
Max. working temperature: 365°F.

Code	Description	Cv	Lbs	USD
<b>NA39753</b>	1" NPT female T handle	50	0.7	<b>54.50</b>
<b>NA59600</b>	2" NPT female w/Lever	309	3.5	<b>195.50</b>

		FLOW RATE					
	Size	2"	2½"	3"	4"	5"	6"
4.0 t/s	GPM	37	63	96	149	259	380
	GPM	89	150	227	355	816	904
	Cv	87	174	208	324	520	832



## AIR AND DIRT SEPARATORS




### 546 DISCALDIRT®

tech. broch. 01123

Air & Dirt separator.  
Brass body.  
Stainless steel float guide pin and linkage.  
Glass reinforced nylon internal element.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.  
Particle separation capacity: to 5 µm (0.2 mil).

Code	Description	Pk	Lbs	USD
546095A	¾" sweat	1	8.3	407.10
546096A	1" sweat	1	8.3	449.60
546016A	1" NPT male	1	8.3	472.30
546097A	1¼" sweat	1	8.3	536.00

The **DISCALDIRTMAG™** air and dirt separator with magnet uses an external magnet ring for separation of ferrous impurities. The external magnet allows greater effectiveness in the separation and collection of ferrous impurities. The impurities are retained in the body of the dirt separator by the strong magnetic field created by magnets in its external outer ring. The outer ring is removable from the body to allow the flushing of sludge, with the system still running. Since the magnetic ring is positioned outside the body of the dirt separator, it does not interfere with the flow through the device.



### 5461 DISCALDIRTMAG™

tech. broch. 01123

Air & Dirt separator with magnet.  
Brass body.  
Stainless steel float guide pin and linkage.  
Glass reinforced nylon internal element.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.  
Particle separation capacity: to 5 µm (0.2 mil).

PCT  
INTERNATIONAL  
APPLICATION  
PENDING

Code	Description	Pk	Lbs	USD
546195A	¾" sweat	1	8.5	486.50
546196A	1" sweat	1	8.5	538.00
546116A	1" NPT male	1	8.5	561.00
546197A	1¼" sweat	1	8.5	640.00



Insulation shell fits brass DISCALDIRT® 546 and 5461 DISCALDIRTMAG™ series.

Code	Description	Pk	Lbs	USD
CBN546002	Fits ¾", 1", 1¼"	1	0.1	115.50

FLOW RATE				
	Size	¾"	1"	1¼"
4.0 f/s	GPM	8	9	10
10.0 f/s	GPM	14	22	30
	Cv	19	32	40

The **DISCALDIRT®** air and dirt separator uses a coalescing element that consists of an assembly of concentric diamond pattern mesh surfaces. This element creates the whirling movement required to facilitate the release of micro-bubbles and their adhesion to these surfaces. The bubbles, fusing with each other, increase in volume until the buoyancy force overcomes the adhesion force to the surface. They rise towards the top of the unit and are released through a float-operated automatic air release valve.

The dirt separating action performed by the same element which offers little resistance to the medium flow while ensuring dirt separation. The particles collide with the concentric diamond pattern mesh surfaces and then settle to the bottom, and not by filtration unlike mesh strainers; which, over time, get progressively clogged. By contrast, the DISCALDIRT®'s low-velocity-zone dirt separator function efficiently removes the particles to as small as 5µm (0.2 mil) with very low head loss. The dirt can then be removed through the bottom drain port.




### 546 DISCALDIRT®

tech. broch. 01123

Air & Dirt separator.  
Epoxy resin coated steel body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
ANSI 150 flange connections.  
Complete with drain valve (NA39753)  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
Particle separation capacity: to 5 µm (0.2 mil).

Code	Description	Lbs	USD
546050A	2" ANSI flange	40	3,651.00
546060A	2½" ANSI flange	42	3,848.00
546080A	3" ANSI flange	73	4,956.00
546100A	4" ANSI flange	78	5,433.00
546120A	5" ANSI flange	181	7,837.00
546150A	6" ANSI flange	188	9,562.00

#### Dirt separation efficiency

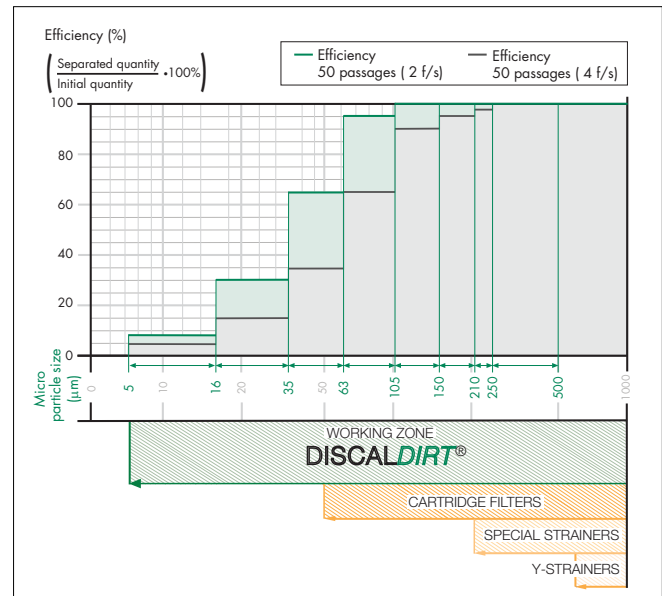

## AIR AND DIRT SEPARATORS



### NA546 DISCAL *DIRT*<sup>®</sup> ASME/CRN

tech. broch. 01123

Air & Dirt separator.  
Epoxy resin coated steel body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
2" threaded NPT connection.  
ANSI 150 flange connections.  
Complete with drain valve (NA39753)  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
Particle separation capacity: to 5 µm (0.2 mil).  
ASME and CRN Registered.

Code	Description	Lbs	USD
NA546050T	2" Threaded ASME & CRN	28	<b>3,496.00</b>
NA546060A	2½" ANSI flange ASME & CRN	42	<b>4,703.00</b>
NA546080A	3" ANSI flange ASME & CRN	73	<b>6,057.00</b>
NA546100A	4" ANSI flange ASME & CRN	78	<b>6,640.00</b>
NA546120A	5" ANSI flange ASME & CRN	181	<b>9,579.00</b>
NA546150A	6" ANSI flange ASME & CRN	188	<b>11,687.00</b>

ASME U-stamp tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors; CRN Registered.



### NA546 DISCAL *DIRT*<sup>®</sup> ASME/CRN

tech. broch. 01123

Air & Dirt separator.  
Epoxy resin coated steel body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
ANSI 150 flange connections.  
Complete with drain valve (NA59600)  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
Particle separation capacity: to 5 µm (0.2 mil).  
ASME and CRN Registered.

Code	Description	Lbs	USD
NA546200A	8" ANSI flange ASME & CRN	355	<b>22,023.00</b>
NA546250A	10" ANSI flange ASME & CRN	555	<b>32,895.00</b>
NA546300A	12" ANSI flange ASME & CRN	825	<b>42,345.00</b>

Larger sizes available, consult factory.

ASME U-stamp tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors; CRN Registered.

		FLOW RATE								
	Size	2"	2½"	3"	4"	5"	6"	8"	10"	12"
4.0 f/s	GPM	37	63	95	149	259	380	625	980	1,410
10.0 f/s	GPM	89	150	227	355	816	904	1,570	2,450	3,530
	Cv	87	174	208	324	520	832	1,109	1,387	1,664



### NA546 DISCAL *DIRT MAG*<sup>®</sup> ASME

tech. broch. 01123


Air & Dirt separator.  
Epoxy resin coated steel body.  
Stainless steel float guide pin and linkage.  
Stainless steel mesh internal element.  
ANSI 150 flange connections.  
2" threaded NPT connection.  
Complete with drain valve (NA39753)  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
Particle separation capacity: to 5 µm (0.2 mil).  
Magnetite removal efficiency: 95%  
ASME Registered.

PCT  
INTERNATIONAL  
APPLICATION  
PENDING

Code	Description	Lbs	USD
NA546050TM	2" Threaded ASME	28	<b>4,195.00</b>
NA546060AM	2½" ANSI flange ASME	42	<b>5,644.00</b>
NA546080AM	3" ANSI flange ASME	73	<b>7,268.00</b>
NA546100AM	4" ANSI flange ASME	81	<b>7,968.00</b>
NA546120AM	5" ANSI flange ASME	184	<b>11,494.00</b>
NA546150AM	6" ANSI flange ASME	191	<b>14,024.00</b>

ASME U-stamp tagged and registered with the National Board of Boiler and Pressure Vessel Inspectors Registered.

DISCALDIRTMAG<sup>®</sup> separators offer highly efficient separation of air and dirt as well as magnetite. The magnetite is captured by a concentrated magnetic field created by a stack of neodymium rare-earth magnets positioned inside a brass dry-well which is below the flow stream. Non-magnetic dirt particles are separated by colliding with an internal element in the flow stream and settling to the bottom. The deep collection chamber keeps the dirt from re-entering the flow stream.

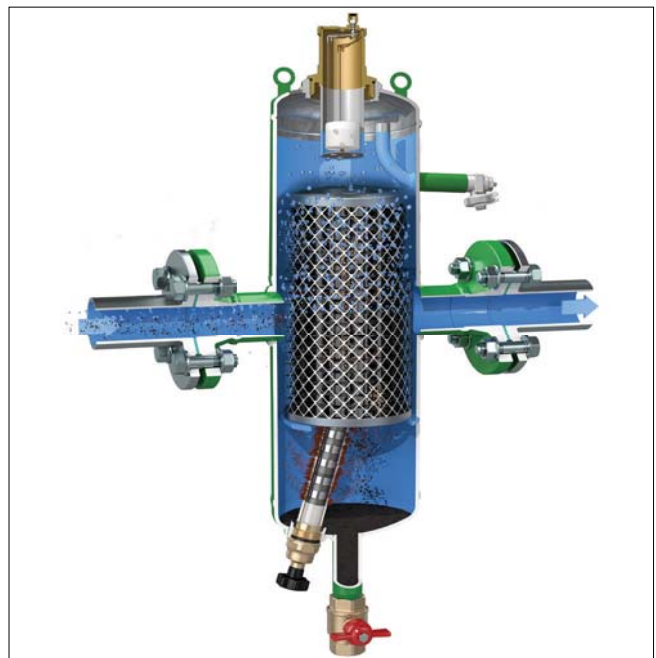

## DIRT & MAGNETIC DIRT SEPARATORS

The dirt separating action performed by the DIRTAL® is based on using the internal element with concentric diamond pattern mesh surfaces instead of a mechanical filter. The element offers little resistance to the medium flow while ensuring dirt separation. This occurs due to the particles colliding with the concentric diamond pattern mesh surfaces and then settling to the bottom, and not by filtration; which, over time, gets continuously clogged. By contrast, the DIRTAL® low-velocity-zone dirt separator requiring a pressure drop 25% or less that of a comparable Y-strainer depending on mesh size and amount of filtered debris and efficiently removes the particles to as small as 5 µm (0.2 mil) with very low head loss. The dirt collection chamber at the bottom of the DIRTAL® is at the optimal distance from the inlet and outlet connections that the collected dirt particles are not affected by the swirling flow through the mesh element. The dirt can then be removed through the bottom drain port even with the system running, by opening the drain valve.

**Low head losses and performance are maintained over time.**



### 5462 DIRTAL®

tech. broch. 01137

Dirt separator.  
Brass body.  
½" NPT top thread with plug for optional air vent, code 502243A.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.  
Particle separation capacity: to 5 µm (0.2 mil).

Code	Description	Lbs	USD
546205A	¾" NPT	4.2	243.50
546228A	1" sweat	4.2	256.40
546206A	1" NPT	4.2	269.20
546235A	1¼" sweat	4.2	373.50
546207A	1¼" NPT	5.3	392.20
546241A	1½" sweat	4.9	483.60
546208A	1½" NPT	6.2	508.00
546254A	2" sweat	5.5	595.00
546209A	2" NPT	6.2	624.00

FLOW RATE						
	Size	¾"	1"	1¼"	1½"	2"
4.0 f/s	GPM	6	9	15	24	36
10.0 f/s	GPM	19	22	36	57	66
	Cv	19	32	56	73	81




Replacement drain valve fits DIRTAL® 5462 series.  
Brass body.  
Max. working pressure: 150 psi.  
Max. working temperature: 250°F.

Code	Description	Lbs	USD
538402 FD	½" NPT male x ¾" GHT	0.3	19.40

The versatile DIRTMAG® magnetic dirt separator removes both magnetic and non-magnetic particles continuously. In addition to removing sand and rust is ferrous with a glass-reinforced nylon internal element in a low-velocity-zone chamber, the DIRTMAG® features a powerful removable external magnet around the body below the flow line for fast and effective capture of ferrous particles. The DIRTMAG® has the magnet positioned externally to maintain low pressure loss, and removes up to 95% of the ferrous oxide particles that can form in a hydronic system.

The DIRTMAG® can be fitted with optional insulated covers, code CBN5462xx series purchased separately, to minimize heat loss.

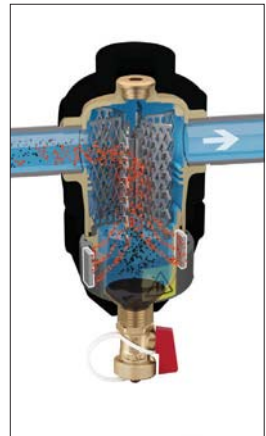

### 5463 DIRTMAG®

tech. broch. 01137

Dirt separator with magnet.  
Brass body.  
½" NPT top thread with plug.  
Max. working pressure: 150 psi.  
Working temperature range: 32—250°F.  
Particle separation capacity: to 5 µm (0.2 mil).



Code	Description	Lbs	USD
546306A	1" NPT female	4.2	311.50
546328A	1" sweat	4.2	296.70
546307A	1¼" NPT female	5.3	454.90
546335A	1¼" sweat	4.2	433.20
546308A	1½" NPT female	6.2	592.00
546341A	1½" sweat	4.9	564.00
546309A	2" NPT female	6.2	714.00
546354A	2" sweat	5.5	688.00



Insulation shell fits DIRTAL® 5462 and DIRTMAG® 5463 series.  
Labels included for field installation to externally identify product use.

Code	Description	Lbs	USD
CBN546205	Fits ¾" & 1" DIRTAL®, DIRTMAG®	0.1	73.50
CBN546207	Fits 1¼" & 1½" DIRTAL®, DIRTMAG®	0.1	78.80
CBN546209	Fits 2" DIRTAL®, DIRTMAG®	0.1	86.10



## MAGNETIC DIRT SEPARATORS

2nd Q1 2015

### NA5453 tech. broch. 01240 **DIRTMAG®**



Dirt separator with magnet.  
Brass mounting housing.  
Composite PA66G30 body.  
Max. working pressure: 45 psi.  
Working temperature range: 32—195°F.  
Particle separation capacity: to 5 µm (0.2 mil).  
Magnetite removal efficiency: 95%  
Union isolation ball valves.  
Drain valve with hose connection.  
Top dosing point port.  
Dosing capacity: 12 fluid oz.  
Manual screw air vent.


PCT  
INTERNATIONAL  
APPLICATION  
PENDING

Code	Description	Lbs	USD
NA545355	¾" union NPT with isolation valves	5.5	<b>318.80</b>
NA545356	1" union NPT with isolation valves	5.5	<b>372.80</b>

FLOW RATE			
	Size	¾"	1"
4.0 f/s	GPM	8	9
10.0 f/s	GPM	14	20
	Cv	12	19

This multifunction device can also be used as an dosing point to inject chemical additives into the circuit.

Use a screwdriver to undo the screw on the top plug in order to purge any air that has collected at the top of the body.




### NA5453 tech. broch. 01240 **DIRTMAG®**



Dirt separator with magnet.  
Brass mounting housing.  
Composite PA66G30 body.  
Max. working pressure: 45 psi.  
Working temperature range: 32—195°F.  
Particle separation capacity: to 5 µm (0.2 mil).  
Magnetite removal efficiency: 95%  
Drain valve with hose connection.  
Top dosing point port.  
Dosing capacity: 12 fluid oz.  
Manual screw air vent.

PCT  
INTERNATIONAL  
APPLICATION  
PENDING

Code	Description	Lbs	USD
NA545305	¾" union NPT	4.5	<b>266.60</b>
NA545365	¾" press 	4.5	<b>275.00</b>
NA545395	¾" union sweat	4.5	<b>264.60</b>
NA545306	1" union NPT	4.5	<b>306.90</b>
NA545396	1" union sweat	4.5	<b>292.30</b>



The dirt separator with magnet combines the action of the internal element and magnet. The impurities in the water strike the internal element and are separated, dropping into the bottom of the body where they are collected.

Magnetite impurities are also trapped inside the dirt separator body by two strong magnets inserted into removable outer ring collar. The collected impurities are discharged by removing the external ring magnet and opening the drain valve, this procedure can even be performed while the system is in operation.



The special coupling between the locking nut and the mounting base allows the DIRTMAG® dirt separator to be rotated for installation to either vertical or horizontal pipes, while maintaining the same operating performance.

## DIRT SEPARATORS

The dirt separating action performed by the DIRTAL® is based on using the internal element with concentric diamond pattern mesh surfaces instead of a mechanical filter. The element offers little resistance to the medium flow while ensuring dirt separation. This occurs due to the particles colliding with the concentric diamond pattern mesh surfaces and then settling to the bottom, and not by filtration; which, over time, gets continuously clogged. By contrast, the DIRTAL® low-velocity-zone dirt separator efficiently removes the particles to as small as 5 µm (0.2 mil) with very low head loss. The dirt collection chamber at the bottom of the DIRTAL® is at the optimal distance from the inlet and outlet connections that the collected dirt particles are not affected by the swirling flow through the mesh element. The dirt can then be removed through the bottom drain port even with the system running, by opening the drain valve.

**Low head losses and performance are maintained over time.**



### 5465 DIRTAL®

tech. broch. 01137

Dirt separator.  
Epoxy resin coated steel body.  
Complete with drain valve (code NA39753).  
ANSI 150 flange connections.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
Particle separation capacity: to 5 µm (0.2 mil).

Code	Description	Lbs	USD
546550A	2" ANSI flange	29	1,944.00
546560A	2½" ANSI flange	32	2,091.00
546580A	3" ANSI flange	51	2,828.00
546510A	4" ANSI flange	54	3,128.00

		FLOW RATE					
	Size	2"	2½"	3"	4"	5"	6"
4.0 f/s	GPM	37	63	95	149	259	380
10.0 f/s	GPM	89	150	227	355	816	904
	Cv	88	176	211	328	520	842



Drain ball valve.  
Fits DIRTAL® 5465 and NA5465 series.  
Brass body.  
Tee handle.  
Max. working pressure: 150 psi.  
Max. working temperature: 365°F.

Code	Description	Cv	Lbs	USD
NA39753	1" NPT female T handle	50	0.7	54.50




### NA5465 DIRTAL® ASME/CRN

tech. broch. 01137

Dirt separator.  
Epoxy resin coated steel body.  
Complete with drain valve (code NA39753).  
ANSI 150 flange connections.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
ASME and CRN Registered.  
Particle separation capacity: to 5 µm (0.2 mil).

Code	Description	Lbs	USD
NA546550A	2" ANSI flange ASME & CRN	38	3,014.00
NA546560A	2½" ANSI flange ASME & CRN	38	3,207.00
NA546580A	3" ANSI flange ASME & CRN	55	4,176.00
NA546510A	4" ANSI flange ASME & CRN	55	4,570.00
NA546512A	5" ANSI flange ASME & CRN	138	6,589.00
NA546515A	6" ANSI flange ASME & CRN	148	8,452.00

### Dirt separation efficiency

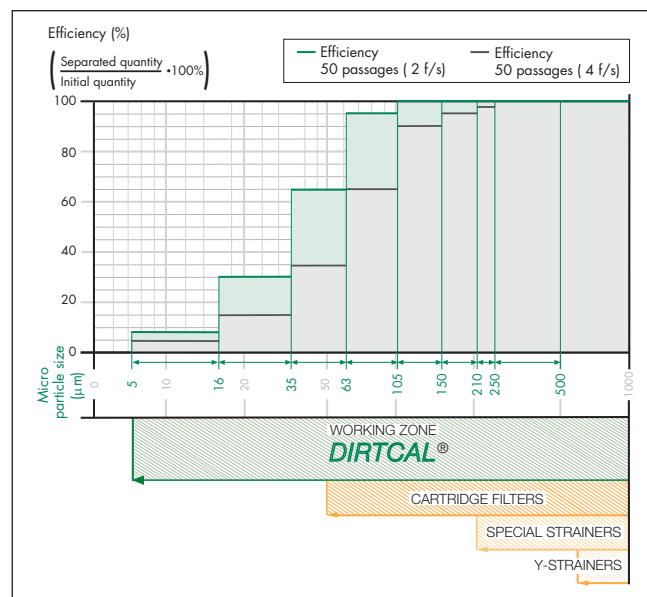

## MAGNETIC DIRT SEPARATORS

Non-magnetic and magnetic dirt particles in hydronic systems can deposit onto heat exchanger surfaces and accumulate in pump cavities causing reduced thermal efficiency and premature wear. The small and often microscopic magnetic particles, called magnetite, form when iron or steel corrodes. Highly abrasive, the extremely fine particles are difficult to remove by traditional means. DIRTMAG® separators offer highly efficient separation of typical dirt as well as magnetite. The magnetite is captured by a concentrated magnetic field created by a stack of neodymium rare-earth magnets positioned inside a brass dry-well which is below the flow stream. Non-magnetic dirt particles are separated by colliding with an internal element in the flow stream and settling to the bottom. The deep collection chamber keeps the dirt from re-entering the flow stream.



To purge the debris, the flexible magnetic stack is removed from the brass dry-well and, even while the system is still running, the drain valve is opened. Aided by the system pressure, the dirt and magnetite flushes out quickly and effectively. DIRTMAG® magnetic dirt separators accomplish 2½ times the magnetite removal performance of standard dirt separators, delivering up to 95% elimination efficiency.



2" QT 2015



PCT  
INTERNATIONAL  
APPLICATION  
PENDING

### NA5465

tech. broch. 01137

#### DIRTMAG®

Dirt magnetic separator.  
Epoxy resin coated steel body.  
Complete with drain valve (code NA39753).  
ANSI 150 flange connections.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
ASME Registered.  
Particle separation capacity: to 5 µm (0.2 mil).  
Magnetite removal efficiency: 95%

Code	Description	Lbs	USD
NA546550AM	2" ANSI flange ASME	41	<b>3,617.00</b>
NA546560AM	2½" ANSI flange ASME	41	<b>3,849.00</b>
NA546580AM	3" ANSI flange ASME	58	<b>5,011.00</b>
NA546510AM	4" ANSI flange ASME	58	<b>5,484.00</b>
NA546512AM	5" ANSI flange ASME	141	<b>7,906.00</b>
NA546515AM	6" ANSI flange ASME	151	<b>10,142.00</b>

2" QT 2015



PCT  
INTERNATIONAL  
APPLICATION  
PENDING

### 5465

tech. broch. 01137

#### DIRTMAG®

Dirt magnetic separator.  
Epoxy resin coated steel body.  
Complete with drain valve (code NA39753).  
ANSI 150 flange connections.  
Max. working pressure: 150 psi.  
Vessel temperature range: 32—270°F.  
Particle separation capacity: to 5 µm (0.2 mil).  
Magnetite removal efficiency: 95%

Code	Description	Lbs	USD
546550AM	2" ANSI flange	41	<b>2,430.00</b>
546560AM	2½" ANSI flange	41	<b>2,614.00</b>
546580AM	3" ANSI flange	58	<b>3,535.00</b>
546510AM	4" ANSI flange	58	<b>3,910.00</b>

## ACCESSORIES FOR AIR AND DIRT SEPARATORS



tech. broch. 01024

Hygroscopic air vent cap fits DISCAL® 551, and DISCALDIRT® 546 series, and MINICAL® 502 series.

Code	Description	Lbs	USD
<b>R59681</b>	Vent cap	0.1	<b>24.00</b>



tech. broch. 01054

Anti-suction air vent cap fits DISCAL® 551, DISCALDIRT® 546 series and MINICAL® 502 series.

Code	Description	Lbs	USD
<b>562100</b>	Vent cap	0.1	<b>25.40</b>


 tech. broch. 01060  
tech. broch. 01060

Replacement air vent cap fits DISCAL® 551 and DISCALDIRT® 546 series.

Code	Description	Lbs	USD
<b>R59119</b>	Vent cap	0.1	<b>16.00</b>



Replacement plastic cap fits MINICAL® 5020 and 5021 series.

Code	Description	Lbs	USD
<b>R56214</b>	Vent cap	0.1	<b>2.60</b>



Replacement plastic air vent cap fits 5026 and 5027 series.

Code	Description	Lbs	USD
<b>R56142</b>	Vent cap	0.1	<b>2.50</b>



tech. broch. 01060

Replacement air vent assembly fits DISCAL® brass 551 series (except Compact), brass 546, 5461 series and SEP4™ 5495 series.

Code	Description	Lbs	USD
<b>59829</b>	Air vent	2.0	<b>154.50</b>



tech. broch. 01060

Replacement air vent assembly fits steel 551, NA551 steel DISCAL® and 546 steel series DISCAL®DIRT and DISCALDIRT-MAG®.

Code	Description	Lbs	USD
<b>59756</b>	Air vent	3.0	<b>199.80</b>



Replacement cover and float 99x series fits DISCAL® brass 551, NA551 series and DISCALDIRT® brass 546 series. Vent cap sold separately.


Code	Description	Lbs	USD
<b>F39807</b>	Cover and float	0.4	<b>75.60</b>



tech. broch. 01133


Vent cap adapter fits all air separators and air vents except 5026 and 5027 series

Code	Description	Lbs	USD
<b>NA10204</b>	¼" NPT male	0.1	<b>27.30</b>




Vent cap adapter NA10204 replaces the air vent cap which provides a ¼" male NPT thread which can be used to connect a discharge tube with separate fittings.

This diagram is an example

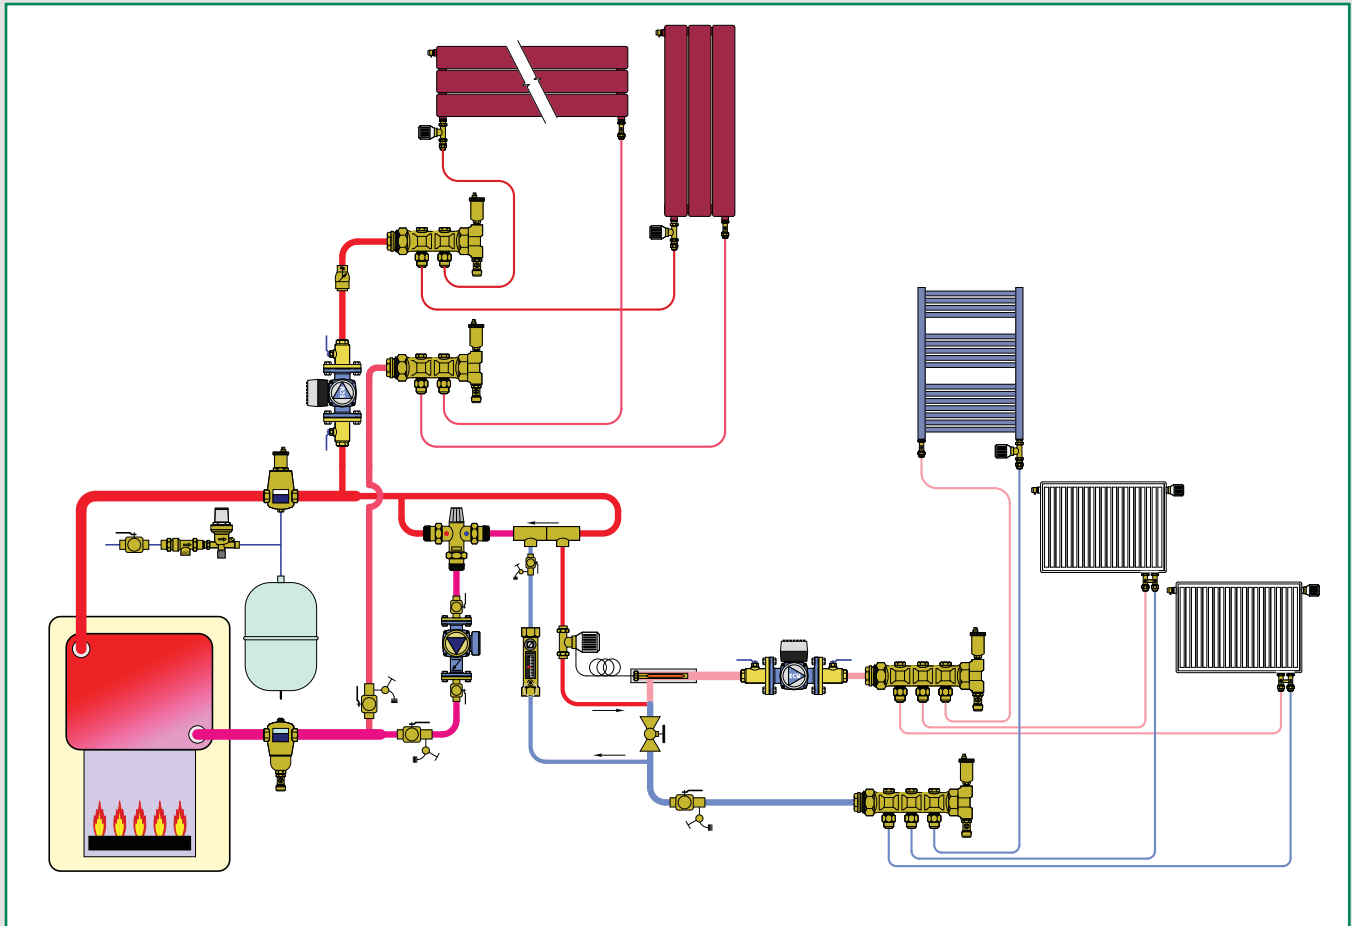

- Thermostatic control heads
- Accessories for thermostatic control heads
- Thermostatic radiator valve bodies
- Towel warmer radiator valves
- Connection valves for panel style radiators
- Connection fittings

## THERMOSTATIC CONTROL HEADS

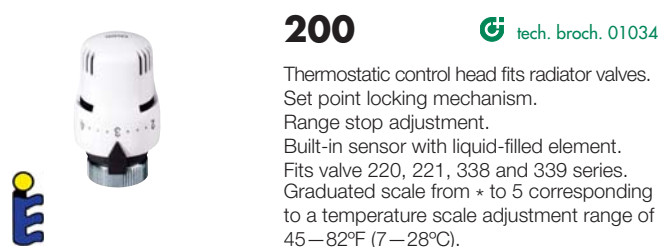

**200**

tech. broch. 01034

Thermostatic control head fits radiator valves. Set point locking mechanism. Range stop adjustment. Built-in sensor with liquid-filled element. Fits valve 220, 221, 338 and 339 series. Graduated scale from \* to 5 corresponding to a temperature scale adjustment range of 45—82°F (7—28°C).

Code	Description	Lbs	USD
<b>200000</b>	Built-in sensor	0.5	<b>76.20</b>



**472**

tech. broch. 01034

Thermostatic control head with remote adjusting knob, liquid-filled element. Fits valves 220, 221, 338, 339 & 676 series (direct coupling). Temperature range: 43—82°F (6—28°C). Capillary length: 78 in. (2 m.)

Code	Description	Lbs	USD
<b>472000</b>	Remote wall sensor	1	<b>247.80</b>



**201**

tech. broch. 01034

Thermostatic control head fits radiator valves. With remote sensor. Fits valve 220, 221, 338 and 339 series. Graduated scale from \* to 5 corresponding to a temperature scale adjustment range of 45—82°F (7—28°C). Capillary length: 78" (2 m.).

Code	Description	Lbs	USD
<b>201000</b>	Remote sensor	1	<b>136.50</b>



**203**

tech. broch. 01034

Thermostatic control head fits radiator valves; with contact probe. Built-in sensor with liquid-filled element. Fits valve 220, 221, 338 and 339 series. The pre-set scale corresponds to adjustment temperature range of 68—122°F (20—50°C). Capillary length: 78" (2 m.).

Code	Description	Lbs	USD
<b>203502</b>	Remote sensor probe	0.5	<b>258.30</b>

## ACCESSORIES



**209**

tech. broch. 01034

Tamper-proof cap for public installations. Fits thermostatic control head 200 and 201 series. To be used with special hex key code 209001.

Code	Description	Lbs	USD
<b>209000</b>	Tamper proof cap	0.1	<b>26.30</b>



**209**

tech. broch. 01034

Special hex key fits tamper-proof cap. To be used with tamper-proof caps 209 series.

Code	Description	Lbs	USD
<b>209001</b>	Hex key	0.1	<b>10.50</b>



**NA475**

Pocket well fits 203502. Length: 7 3/8" (187 mm).

Code	Description	Lbs	USD
<b>NA475002</b>	3/4" NPT male	0.2	<b>45.20</b>

## THERMO-ELECTRIC ACTUATOR



**6564**

tech. broch. 01198

Thermo-electric actuator for electric control of radiator valves. Fits valves 220, 221, 338 and 339 series. Low current draw. Power supply: 24 V AC/DC. Initial current draw: ≤ 250 mA. Power consumption: 3 W, 6 VA. 31.5" wire lead connection.

Code	Description	Lbs	USD
<b>656404</b>	24 V AC/DC	4.0	<b>103.30</b>
<b>656414</b>	24 V AC/DC with microswitch	4.0	<b>129.20</b>



**4490**

Manual knob for thermostatic radiator valves. Fits valves 220 and 221 series.

Code	Description	Lbs	USD
<b>449010</b>	Manual knob	0.1	<b>15.80</b>



## NPT THERMOSTATIC RADIATOR VALVE BODIES

### 220

tech. broch. 01034



Angled radiator valve body. Order thermo-electric actuators or thermostatic control heads separately for field installation.  
Chrome plated.  
Max. working pressure: 150 psi (10 bar).  
Temperature range: 40–212°F (5–100°C).

Code	Description	Cv	Lbs	USD
220400A	½" NPT	2.7	0.3	<b>74.60</b>
220500A	¾" NPT	3.7	0.3	<b>81.90</b>

### 221

tech. broch. 01034




Straight radiator valve body. Order thermo-electric actuators or thermostatic control heads separately for field installation.  
Chrome plated.  
Max. working pressure: 150 psi (10 bar).  
Temperature range: 40–212°F (5–100°C).

Code	Description	Cv	Lbs	USD
221400A	½" NPT	1.7	0.3	<b>74.60</b>
221500A	¾" NPT	2.5	0.3	<b>81.90</b>

#### Function

The control mechanism of the thermostatic radiator valve is a proportional temperature controller, composed of a liquid filled bellows. With increasing temperature the liquid expands which, in turn, causes the bellows to expand. When the temperature decreases the opposite occurs; the bellows contracts allowing the spring to return it to the original position. By connection to the valve stem, these movements adjust the heat transfer medium to the radiator.

\*Head shown vertical for illustration only, it should be installed horizontally.

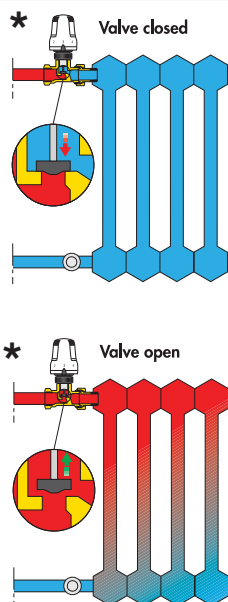

Replacement internal valve assembly fits radiator valves.

Code	Description	Lbs	USD
<b>F36073</b>	½" and ¾"	0.1	<b>10.50</b>





Universal radiator tool for installing ½ and ¾" tail pieces.

Code	Description	Lbs	USD
<b>387127</b>	Radiator tool	1.0	<b>110.00</b>

#### Key features

The thermostatic control head is filled with a non compressible liquid bellows (1). Plus, the radiator valve body has extra strong valve stem compression spring (2). The non compressible liquid provides the force required to compress the strong valve stem spring. When the temperature decreases, the liquid bellows contracts, which allows the valve stem spring to lift the valve plug from valve seat after long periods of non movement. This ensures that after a long 'off-season', when the actuator operates for the first time, the spring reliably lifts the valve plug off the seat without sticking. In addition, the 200000 control head features an easy-to-use locking mechanism that prevents unauthorized temperature set point changes and a range stop adjustment that limits the maximum temperature setting to save energy and over-heating.

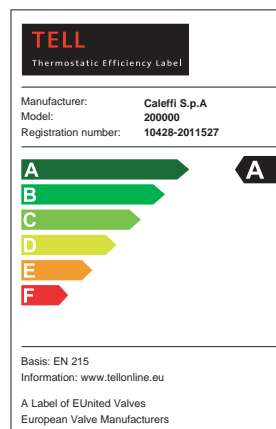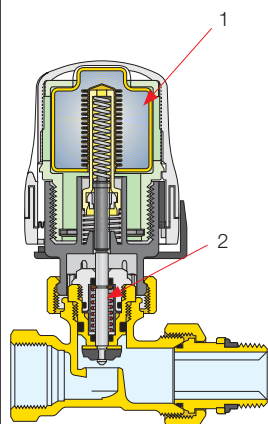

The Caleffi thermostatic control heads 200000 and 201000, and the radiator valve bodies 220 and 221 series in combination with control heads 200 and 201 are approved to EN 215 (KEYMARK) and Thermostatic Efficiency Label (TELL): Level A, Reg. 10428/9-20110527. Under EN 215 these devices are certified to meet manufacturer quality assurance requirements with reference to temperature setting and adjustment, nominal flow rate, hysteresis, and leak tightness of the body assembly and stem seal. The European TELL certification promotes responsible energy usage and provides information to customers when selecting products. The control heads 200 and 201 are "A" rated for efficiency. Additional information available on request.

## EUROPEAN TOWEL WARMER RADIATOR VALVES



**338**

tech. broch. 01009

Angled radiator valve body.  
Convertible from standard manual operation to automatic control with thermostatic control heads.  
Chrome plated.  
Fits copper, single and multilayer PEX pipes.  
Max. working pressure: 150 psi (10 bar).  
Temperature range: 40–212°F (5–100°C).

Code	Radiator Connection	Pipe Connection	Cv	Lbs	USD
<b>338452</b>	½" straight	¾" conical	3.1	0.5	<b>78.50</b>



**342**

tech. broch. 01009

Angled isolation and balancing valve.  
Chrome plated.  
Fits copper, single and multilayer PEX pipes.  
Max. working pressure: 150 psi (10 bar).  
Temperature range: 40–212°F (5–100°C).

Code	Radiator Connection	Pipe Connection	Cv	Lbs	USD
<b>342452</b>	½" straight	¾" conical	4.6	0.5	<b>51.70</b>



**339**

tech. broch. 01009

Straight radiator valve body.  
Convertible from standard manual operation to automatic control with thermostatic control heads.  
Chrome plated.  
Fits copper, single and multilayer PEX pipes.  
Max. working pressure: 150 psi (10 bar).  
Temperature range: 40–212°F (5–100°C).

Code	Radiator Connection	Pipe Connection	Cv	Lbs	USD
<b>339452</b>	½" straight	¾" conical	2.0	0.5	<b>84.60</b>





**343**

tech. broch. 01009

Straight isolation and balancing valve.  
Chrome plated.  
Fits copper, single and multilayer PEX pipes.  
Max. working pressure: 150 psi (10 bar).  
Temperature range: 40–212°F (5–100°C).

Code	Radiator Connection	Pipe Connection	Cv	Lbs	USD
<b>343452</b>	½" straight	¾" conical	2.5	0.5	<b>54.20</b>


Intended for use in metric radiators such as European towel warmers and panel radiators.

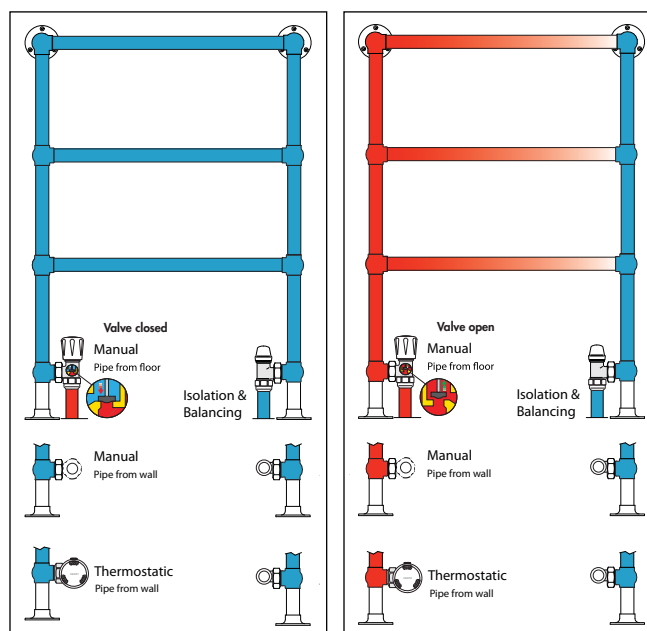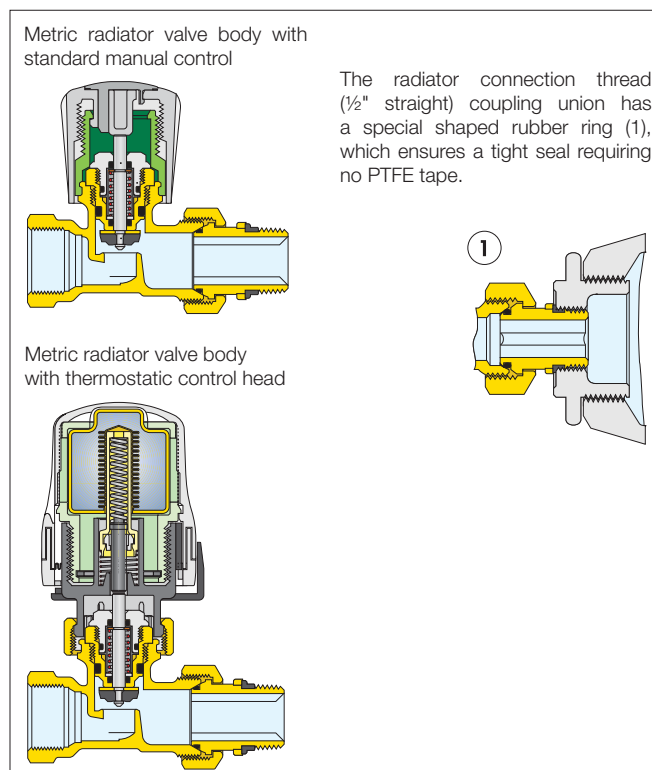



## CONNECTION VALVES FOR PANEL RADIATORS

Caleffi panel radiator valves are designed to be installed to the bottom of panel radiators. They come in two versions: for two-pipe and one-pipe systems. Both are available straight (pipes exiting the floor) and angled (pipes exiting the wall). The two-pipe version is equipped with two ball shut-off valves; the one-pipe, in addition to the shut-off valves, is equipped with an adjustable by-pass from 30% to 50% of the flow rate towards the radiator, and a flow check valve device (1) prevents thermo-syphoning upward into radiator from by-passing flow.

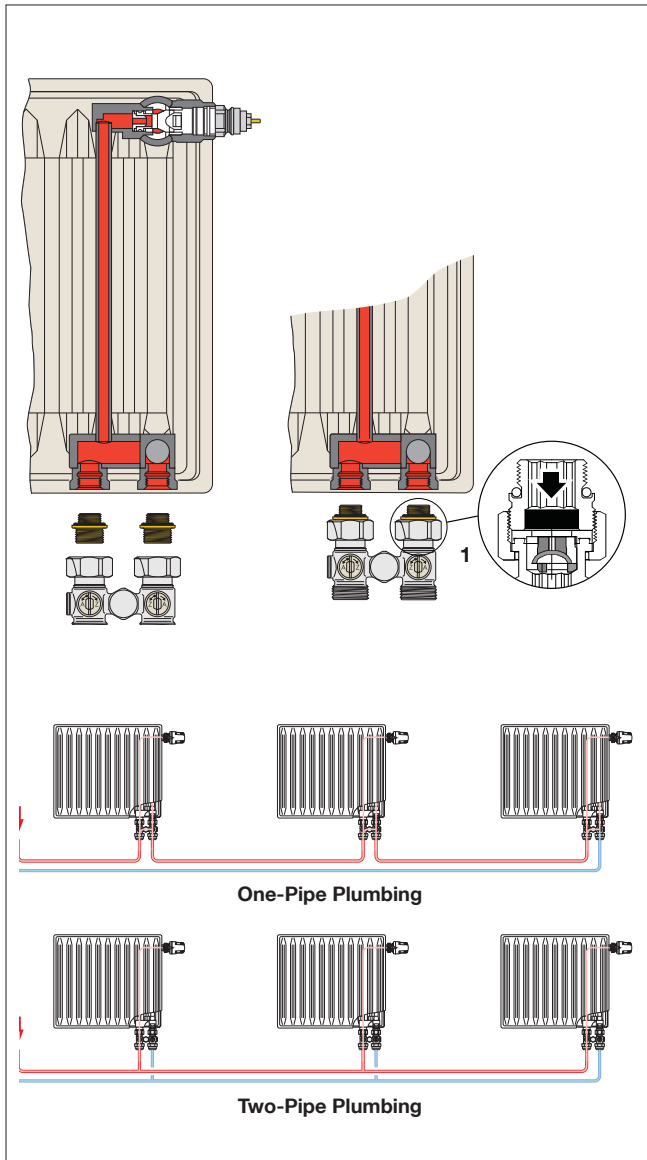

### 3010

[tech. broch. 01036](#)

Valve for panel radiators that have built-in thermostatic valve unit.  
Two-pipe straight version (floor connections) fits 1/2" female radiator connections.  
Max. working pressure: 150 psi (10 bar).  
Max. working temperature: 212°F (100°C).

Code	Radiator Connection	Pipe Connection	Lbs	USD
<b>301040</b>	1/2" straight	3/4" conical	1	<b>63.00</b>



### 3011

[tech. broch. 01036](#)

Valve for panel radiators that have built-in thermostatic valve unit.  
Two-pipe valve angled version (wall connections) fits 1/2" female radiator connections.  
Max. working pressure: 150 psi (10 bar).  
Max. working temperature: 212°F (100°C).

Code	Radiator Connection	Pipe Connection	Lbs	USD
<b>301140</b>	1/2" straight	3/4" conical	1	<b>63.00</b>



### 3012

[tech. broch. 01036](#)

Valve for panel radiators that have built-in thermostatic valve unit.  
One-pipe straight version (floor connections) fits 1/2" female radiator connections.  
With adjustable by-pass.  
Balance knob.  
Max. working pressure: 150 psi (10 bar).  
Max. working temperature: 212°F (100°C).

Code	Radiator Connection	Pipe Connection	Lbs	USD
<b>301241</b>	1/2" straight	3/4" conical	1	<b>110.30</b>



### 3013

[tech. broch. 01036](#)

Valve for panel radiators that have built-in thermostatic valve unit.  
One-pipe angled version (wall connections) fits 1/2" female radiator connections.  
With adjustable by-pass.  
Balance knob.  
Max. working pressure: 150 psi (10 bar).  
Max. working temperature: 212°F (100°C).

Code	Radiator Connection	Pipe Connection	Lbs	USD
<b>301341</b>	1/2" straight	3/4" conical	1	<b>110.30</b>



### 4497

[tech. broch. 01036](#)

Wall-covering plate.  
Fits dual panel radiator valves 301.  
With wall connections.  
In white ABS.  
Outlet center distance: 40—50 mm.

Code	Description	Lbs	USD
<b>449740</b>	Plate	0.1	<b>5.50</b>

## CONNECTION FITTINGS



### 681 Universal PEX fittings

681 series fittings are compatible with any ASTM F876 single layer PEX.  
Max. working pressure: 150 psi.  
Working temperature for ASTM F876 PEX piping: 41—180°F.  
Chrome plated nut.

Code	Description	Lbs	USD
681503A	3/8" nominal PEX	2.0	13.00
681524	1/2" nominal PEX	2.0	13.00
681555	5/8" nominal PEX	2.0	13.00



### 682 Universal PEX-AL-PEX fittings

tech. broch. 01170

682 series fittings are compatible with any ASTM F1281 multilayer PEX-AL-PEX pipe.  
Max. working pressure: 150 psi.  
Working temperature for ASTM F1281 PEX-AL-PEX piping: 41—200°F with tubing rated 200°F.

Code	Description	Lbs	USD
682540A	1/2" PEX-AL-PEX	2.0	12.80



### 437

Compression fitting, fits 1/2" hard copper.  
With o-ring seal.  
Max. working pressure: 150 psi.  
Working temperature range: 41—250°F.  
Chrome plated.  
For connecting copper to valve 301., 338, 339, 342 and 343 series.

Code	Description	Lbs	USD
437516	1/2" compression	1.0	10.70



### NA102

Sweat connection fitting fits 1/2" copper.  
Max. working pressure: 150 psi.  
Working temperature range: 41—250°F.  
Chrome plated nut.  
For connecting copper to valve 301., 338, 339, 342 and 343 series.

Code	Description	Lbs	USD
NA10262	1/2" sweat	2.0	13.90



### 940

tech. broch. 01036

Radiator adapter for directly connecting a panel radiator with PEX, PEX-AL-PEX, sweat, NPT or compression fittings.  
Package of 2 each, priced per package.

Code	Description	Lbs	USD
940451	1/2" M straight x 3/4" M conical (2 ea.)	0.4	23.60




### NA103

NPT onnection fitting.  
Max. working pressure: 150 psi.  
Working temperature range: 41—250°F.  
Chrome plated nut.  
For connecting copper to valve 301., 338, 339, 342 and 343 series.

Code	Description	Lbs	USD
NA10313	1/2" NPT male	2.0	15.00

## ZONE VALVES AND RELAYS

This diagram is an example

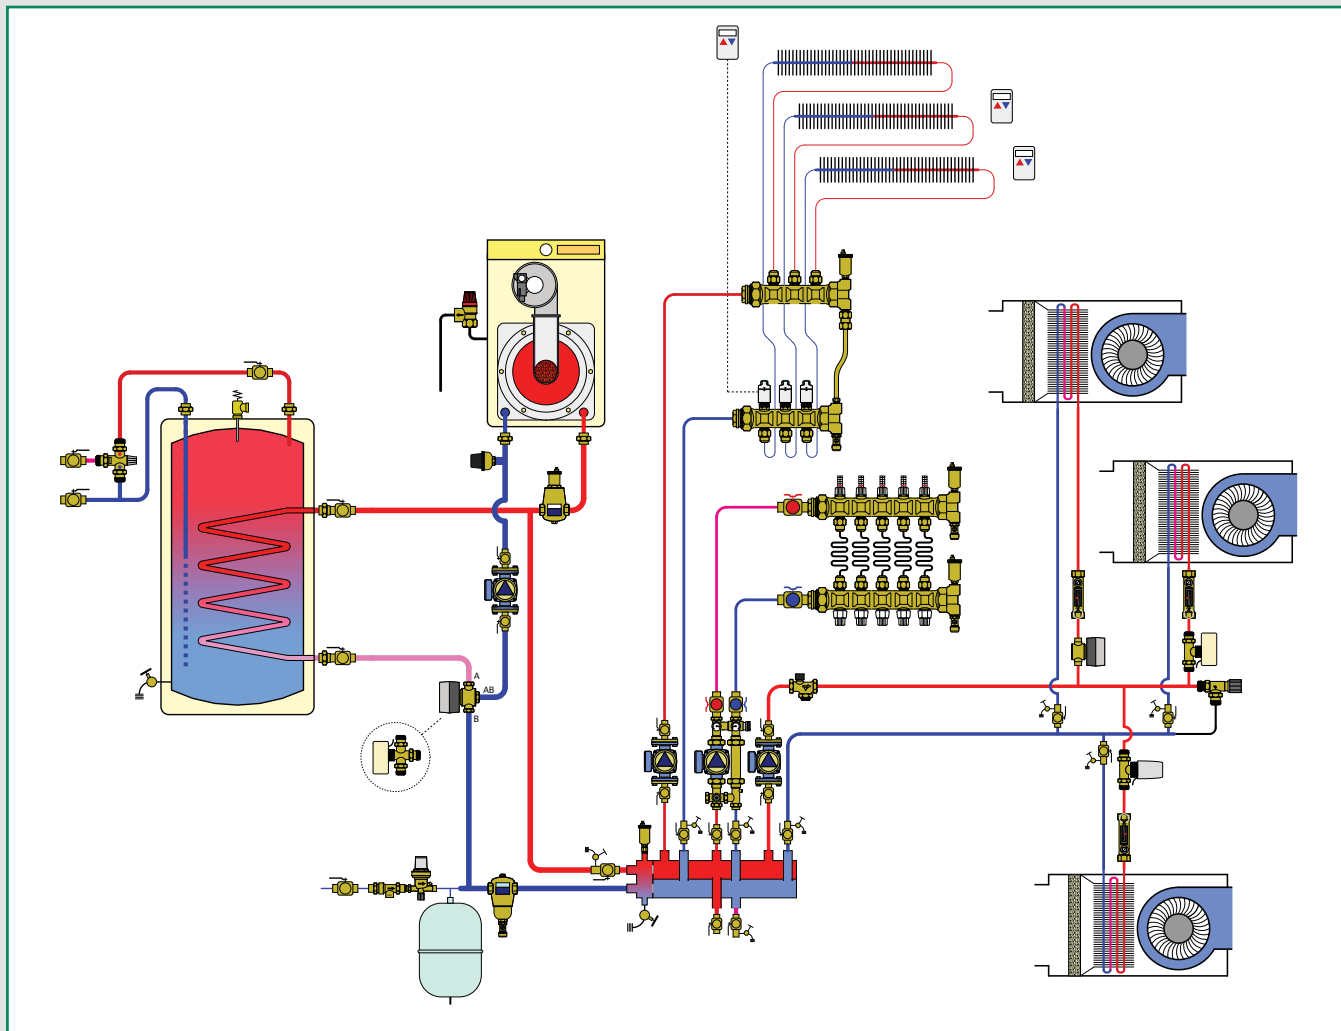

Thermo-electric zone valves

Thermo-electric actuators, including TwisTop™

Motorized zone valves, Z-one™

Z-one Relay controls, Z-one™ Relay

Motorized ball zone valves, high-flow, high-close off

## THERMO-ELECTRIC ZONE VALVES



### 6763

tech. broch. 01072

Two-way thermo-electric zone valve.  
Complete with 656414 actuator.  
Spring return. Normally closed.  
Brass valve body and trim.  
Max. body pressure: 150 psi.  
Max. Temperature: 200°F.  
Max. ΔP close-off pressure: 20 psi.  
Power supply: 24 V AC/DC.  
Initial current draw: ≤ 250 mA.  
Power consumption:  
holding: 3 W  
inrush: 6 VA  
Rating of micro-switch contacts: 5 A (24 V).  
31.5" wire lead connection.

Code	Description	Cv	Lbs	USD
<b>676349A</b>	½" sweat union	4.0	1.4	<b>187.40</b>
<b>676356A</b>	¾" press	4.0	1.4	<b>213.70</b>
<b>676359A</b>	¾" sweat union	4.0	1.4	<b>201.50</b>
<b>676369A</b>	1" sweat union	4.0	1.4	<b>215.50</b>



### 6762

tech. broch. 01072

Two-way thermo-electric zone valve.  
Complete with TwisTop™ (code 656314) actuator. Spring return. Normally closed.  
Brass valve body and trim.  
Max. body pressure: 150 psi.  
Max. Temperature: 200°F.  
Max. ΔP close-off pressure: 20 psi.  
Power supply: 24 V AC/DC.  
Initial current draw: 800 mA.  
Power consumption:  
holding: 3 W  
inrush: 19 VA  
Rating of micro-switch contacts: 5 A (24 V).  
31.5" wire lead connection.

Code	Description	Cv	Lbs	USD
<b>676249A</b>	½" sweat union	4.0	1.4	<b>221.60</b>
<b>676256A</b>	¾" press	4.0	1.4	<b>247.90</b>
<b>676259A</b>	¾" sweat union	4.0	1.4	<b>235.70</b>
<b>676269A</b>	1" sweat union	4.0	1.4	<b>249.70</b>



CE

### 6564

tech. broch. 01198

Thermo-electric actuator with micro-switch fits on 676 two-way zone valve bodies.  
Low current draw.  
Protection class (installed in all positions): NEMA 5 (IP54)  
Power supply: 24 V AC/DC.  
Initial current draw: ≤250 mA.  
Power consumption:  
holding: 3 W  
inrush: 6 VA  
Rating of micro-switch contacts: 5 A (24 V).  
31.5" wire lead connection.

Code	Description	Lbs	USD
<b>656414</b>	24 V AC/DC with micro-switch	0.4	<b>129.20</b>



CE

### 6563

#### TwisTop™

tech. broch. 01072

TwisTop™ thermo-electric actuator with micro-switch fits on 676 two-way zone valve bodies.  
Twist the top to manually open and close micro-switch.  
Power supply: 24 V AC/DC.  
Initial current draw: 800 mA.  
Power consumption:  
holding: 3 W  
inrush: 19 VA  
Rating of micro-switch contacts: 5 A (24 V).  
31.5" wire lead connection.  
US Patent 7,617,989 B2.

Code	Description	Lbs	USD
<b>656314</b>	24 V AC/DC with micro-switch	0.4	<b>163.40</b>



### 6760

tech. broch. 01072

Two-way zone valve body.  
For field installation of thermo-electric actuators 656114, 656314 or 656414.  
Brass body and trim.  
Max. body pressure: 150 psi.  
Max. temperature: 200°F.

Code	Description	Cv	Lbs	USD
<b>676049A</b>	½" sweat union	4.0	1.0	<b>58.20</b>
<b>676056A</b>	¾" press	4.0	1.0	<b>84.50</b>
<b>676059A</b>	¾" sweat union	4.0	1.0	<b>72.30</b>
<b>676069A</b>	1" sweat union	4.0	1.0	<b>86.30</b>



### NA605

Wall transformer.  
Input voltage: 120 V AC  
Output voltage: 24 V AC.  
Power output: 40 VA.  
Agency approval: cULus

Code	Description	Lbs	USD
<b>NA605010</b>	24 VAC wall transformer	1.0	<b>46.60</b>

## MOTORIZED ZONE VALVES



### Z4 Zone 2-way

tech. broch. 01115

Two-way zone valve. Spring return.  
Normally closed actuator: Z111000.  
Auxiliary micro-switch.  
Max. body pressure: 300 psi.  
Temperature range: 32°–240°F.  
Suitable fluids: water, 50% max. glycol,  
15 psi max steam.  
Power supply: 24 V AC.  
Power consumption: 5 W, 7 VA.  
Rating of auxiliary micro-switch contacts:  
0.0 A min, 0.4 A max 24 V (24 V only).  
18" wire lead connection.  
UL873, cUL Listed & CE.  
UL 1995 sec. 18 air plenums and ducts.  
US Patent 7,048,251.



Code	Description	Cv	Δ P	Lbs	USD
<b>Z40</b>	Inverted flare	3.5	30 psi	2.2	<b>220.30</b>
<b>Z40F*</b>	¾" Inv. flare	3.5	30 psi	2.2	<b>236.30</b>
<b>Z42</b>	½" SAE flare	3.5	30 psi	2.2	<b>227.60</b>
<b>Z44</b>	½" sweat	2.5	50 psi	2.1	<b>204.00</b>
<b>Z45</b>	¾" sweat	7.5	20 psi	2.2	<b>222.50</b>
<b>Z46</b>	1" sweat	7.5	20 psi	2.3	<b>275.60</b>
<b>Z47</b>	1¼" sweat	7.5	20 psi	2.3	<b>320.50</b>

\* Two ¾" sweat fittings (NA10006) included.



### Z5 Zone 2-way

tech. broch. 01115

Two-way zone valve. Spring return.  
Normally closed actuator: Z151000  
Auxiliary micro-switch.  
Max. body pressure: 300 psi.  
Temperature range: 32°–240°F.  
Suitable fluids: water, 50% max. glycol,  
15 psi max steam.  
Power supply: 24 V AC.  
Power consumption: 5 W, 7 VA.  
Rating of auxiliary micro-switch contacts:  
0.0 A min, 0.4 A max 24 V (24 V only).  
Screw terminal connection.  
UL873, cUL Listed & CE.  
UL 1995 sec. 18 air plenums and ducts.  
US Patent 7,048,251.



Code	Description	Cv	Δ P	Lbs	USD
<b>Z50</b>	Inverted flare	3.5	30 psi	2.2	<b>225.80</b>
<b>Z50F*</b>	¾" Inv. flare	3.5	30 psi	2.2	<b>241.80</b>
<b>Z54</b>	½" sweat	2.5	50 psi	2.1	<b>209.50</b>
<b>Z55</b>	¾" sweat	7.5	20 psi	2.2	<b>228.00</b>
<b>Z56</b>	1" sweat	7.5	20 psi	2.3	<b>281.10</b>
<b>Z57</b>	1¼" sweat	7.5	20 psi	2.3	<b>326.00</b>

\* Two ¾" sweat fittings (NA10006) included.

### Zone 2-way

tech. broch. 01115



Two-way zone valve. Spring return.  
Normally closed actuator.  
Auxiliary micro-switch.  
Max. body pressure: 300 psi.  
Overall length: 5-5/8"  
Lay length: 3-¾"  
Temperature range: 32–240°F.  
Suitable fluids: water, 50% max. glycol,  
15 psi max steam.  
Power supply: 24 V AC.  
Power consumption: 5 W, 7 VA.  
Rating of auxiliary micro-switch contacts:  
0.0 A min, 0.4 A max 24 V (24 V only).  
UL873, cUL Listed & CE.  
UL 1995 sec. 18 air plenums and ducts.  
US Patent 7,048,251.



Code	Description	Cv	Δ P	Lbs	USD
<b>Z45P</b>	¾" press*	7.5	20 psi	2.2	<b>285.50</b>
<b>Z55P</b>	¾" press**	7.5	20 psi	2.2	<b>291.00</b>

Two ¾" Presscon™ fittings (NA16265) included.

\*18" wire lead connection.

\*\*Screw terminal connection.



Inverted flare sweat adaptors fits Z40, Z50 and inverted flare valve body.

Code	Description	Lbs	USD
<b>NA10005</b>	½" sweat	0.3	<b>10.80</b>
<b>NA10006</b>	¾" sweat	0.3	<b>13.50</b>
<b>NA10007</b>	1" sweat	0.4	<b>22.20</b>
<b>NA61241</b>	Retrofit extension kit	0.2	<b>10.90</b>



Two ¾" Presscon™ copper press tail pieces with 1" brass union nuts and washers for use with 2-way 1" male union valve body (Z200687).

Code	Description	Lbs	USD
<b>NA12256</b>	¾" press with 1" union nut	0.2	<b>52.50</b>



Three ¾" Presscon™ copper press tail pieces with 1" brass union nuts and washers for use with 3-way 1" male union valve body (Z300687).

Code	Description	Lbs	USD
<b>NA12356</b>	¾" press with 1" union nut	0.3	<b>78.75</b>

## MOTORIZED ZONE VALVES



### Z1 Normally Closed

tech. broch. 01115

Z1 NC actuator fits on Z2 and Z3 series valve bodies with the push of a button. Two position spring return normally closed. 7/8" knockout for 1/2" conduit connector. Power: 24, 120, 208, 230 & 277 VAC. Power consumption: 5 W, 7 VA. Conduit connector size: 1/2". Rating of auxiliary switch contacts: 24 VAC: 0.0 A min, 0.4 A max (24 V). 120-277 VAC: 0.25 A min, 5.0 A max (250 V). UL873, cUL Listed & CE. UL 1995 sec.18 air plenums and ducts. US Patent 7,048,251.



### Z1 Normally Opened

tech. broch. 01115

Z1 NO actuator fits on Z2 series valve bodies with the push of a button. Two position spring return normally opened. 7/8" knockout for 1/2" conduit connector. Power: 24, 120, 208, 230 & 277 VAC. Power consumption: 5 W, 7 VA. Conduit connector size: 1/2". Rating of auxiliary switch contacts: 24 VAC: 0.0 A min, 0.4 A max (24 V). 120-277 VAC: 0.25 A min, 5.0 A max (250 V). UL873, cUL Listed & CE. UL 1995 sec. 18 air plenums and ducts. US Patent 7,048,251.

Code	Description	Lbs	USD
Z111000	24V with micro-switch 18" wire	1.1	145.60
Z116000	120V with micro-switch 6" wire	1.1	145.60
Z113000	208V with micro-switch 6" wire	1.1	174.30
Z114000	230V with micro-switch 6" wire	1.1	174.30
Z115000	277V with micro-switch 6" wire	1.1	174.30
Z151000	24V w/micro-switch terminal block	1.1	151.10
Z121000	24V without micro-switch 18" wire	1.1	134.90
Z126000	120V without micro-switch 6" wire	1.1	134.90
Z123000	208V without micro-switch 6" wire	1.1	163.70
Z124000	230V without micro-switch 6" wire	1.1	163.70
Z125000	277V without micro-switch 6" wire	1.1	163.70



Code	Description	Lbs	USD
Z131000	24V with micro-switch 18" wire	1.1	159.20
Z136000	120V with micro-switch 6" wire	1.1	159.20
Z133000	208V with micro-switch 6" wire	1.1	187.80
Z134000	230V with micro-switch 6" wire	1.1	187.80
Z135000	277V with micro-switch 6" wire	1.1	187.80
Z141000	24V without micro-switch 18" wire	1.1	148.50
Z146000	120V without micro-switch 6" wire	1.1	148.50
Z143000	208V without micro-switch 6" wire	1.1	177.10
Z144000	230V without micro-switch 6" wire	1.1	177.10
Z145000	277V without micro-switch 6" wire	1.1	177.10

### Function

The Z-one™ valve is a truly universal zone valve that can be used in a wide range of commercial and residential applications; from fan coils to baseboard, radiant to high rise, the Z-one™ is the professional's valve of choice. The Z-one™ can be used in both chilled or hot water and low pressure steam applications. With Delta P close off pressures of up to 75 PSI, the Z-one™ outperforms all other zone valves. The Z-one™ is available in sizes from 1/2" to 1 1/4" sweat or NPT connections on valve body, with removable actuator available in 24 to 277 voltages.

Some models of Z-one™ actuators contain an auxiliary micro-switch to operate other devices. The 24 V actuators use a sealed reed switch, which has been produced specifically for use with relays, boiler contacts (TT) and DDC systems. It requires no minimum current load. The 120 V - 277 V actuators for applications requiring greater than 400 mA, use a conventional micro-switch with silver contacts. The auxiliary switch is activated when the valve is 60% open or when the actuator is manually opened.

• **Manual opening (Normally closed actuator only)** The valve can be opened manually by moving the lever for opening it. When the power is restored the manual control is automatically overridden. The auxiliary switch in 24 V actuators is tripped when the unit is put into manual open position. This helps during start up to check if the wiring is correct without firing the valve electrically with the thermostat.

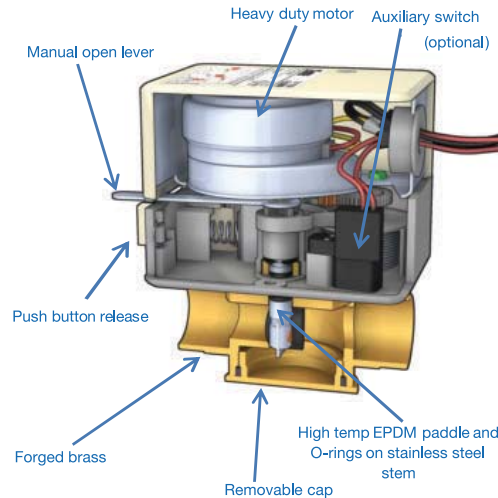

### • Easy push button

A simple push of the button makes it easy to remove it from the body of the valve for maintenance or replacement operations. Warning: the actuator can only be used with valve bodies Z2-Z3 series.

### • Operation

The actuator is fitted with a special mechanism for gradual movement of the valve paddle which provides smooth and quiet constant operation. Power-on full stroke run time is 60 seconds with 6 second power-off return time eliminating the effects of water hammer.



## MOTORIZED ZONE VALVES



### Z2 2-way

tech. broch. 01115

Two-way on/off two position valve.  
Straight through flow pattern.  
Brass body.  
Stainless steel stem.  
EPDM rubber seals and paddle.  
Max. working pressure: 300 psi.  
Max temperature: 240°F.



\*Reduction of Lead in Drinking Water Act  
Compliant: 0.25% Max. weighted average  
lead content. Reduction of Lead in Drinking  
Water Act Certified by IAPMO R&T

Code	Description	Cv	Δ P	Lbs	USD
Z200041	Inverted Flare	1.0	75 psi	1.1	<b>63.70</b>
Z200042	Inverted Flare	2.5	50 psi	1.1	<b>63.70</b>
Z200043	Inverted Flare	3.5	30 psi	1.1	<b>63.70</b>
Z200053	½" SAE Flare	3.5	30 psi	1.1	<b>82.00</b>
Z200411	½" NPT	1.0	75 psi	1.1	<b>63.70</b>
Z200412	½" NPT	2.5	50 psi	1.1	<b>63.70</b>
Z200413	½" NPT	3.5	30 psi	1.1	<b>63.70</b>
Z200431	½" sweat	1.0	75 psi	1.0	<b>58.40</b>
Z200432	½" sweat	2.5	50 psi	1.0	<b>58.40</b>
Z207433*	½" sweat <b>LF</b>	3.5	30 psi	1.0	<b>82.00</b>
Z200512	¾" NPT	2.5	50 psi	1.2	<b>87.40</b>
Z200513	¾" NPT	3.5	30 psi	1.2	<b>87.40</b>
Z200515	¾" NPT	5.0	25 psi	1.2	<b>87.40</b>
Z200517	¾" NPT	7.5	20 psi	1.2	<b>87.40</b>
Z200532	¾" sweat	2.5	50 psi	1.1	<b>76.90</b>
Z200533	¾" sweat	3.5	30 psi	1.1	<b>76.90</b>
Z207533*	¾" sweat <b>LF</b>	3.5	30 psi	1.1	<b>100.50</b>
Z200535	¾" sweat	5.0	25 psi	1.1	<b>76.90</b>
Z200537	¾" sweat	7.5	20 psi	1.1	<b>76.90</b>
Z207537*	¾" sweat <b>LF</b>	7.5	20 ps	1.1	<b>100.50</b>
Z200617	1" NPT	7.5	20 psi	1.3	<b>137.90</b>
Z200635	1" sweat	5.0	25 psi	1.2	<b>130.00</b>
Z200637	1" sweat	7.5	20 psi	1.2	<b>130.00</b>
Z200737	1¼" sweat	7.5	20 psi	1.3	<b>174.90</b>
Z200687**	1" male union	7.5	20 psi	1.1	<b>87.40</b>

\***LF** Low-lead brass body.

\*\* Presscon fitting body.



Two-way and three-way zone valve body  
repair kit. Includes valve stem paddle with  
O-rings, C clip and one bottom cap O-ring.

Code	Description	Lbs	USD
<b>69293A</b>	Repair kit for all 1/2" & 3/4" sweat Z2, Z3 valves	0.4	<b>21.90</b>
<b>69294A</b>	Repair kit for 3/4" NPT and all 1" Z2, Z3 valves	0.4	<b>21.90</b>



### Z3 3-way

tech. broch. 01115

Three-way on/off two position valve.  
Diverging flow pattern.  
Brass body.  
Stainless steel stem.  
EPDM rubber seals and paddle.  
Max. working pressure: 300 psi.  
Max temperature: 240°F.



\*Reduction of Lead in Drinking Water Act  
Compliant: 0.25% Max. weighted average  
lead content. Reduction of Lead in Drinking  
Water Act Certified by IAPMO R&T

Code	Description	Cv	Δ P	Lbs	USD
Z300041	Inverted Flare	1.0	75 psi	1.1	<b>84.90</b>
Z300042	Inverted Flare	2.5	50 psi	1.1	<b>84.90</b>
Z300043	Inverted Flare	3.5	30 psi	1.1	<b>84.90</b>
Z300053	½" SAE Flare	3.5	30 psi	1.1	<b>102.00</b>
Z300411	½" NPT	1.0	75 psi	1.1	<b>84.90</b>
Z300412	½" NPT	2.5	50 psi	1.1	<b>84.90</b>
Z300413	½" NPT	3.5	30 psi	1.1	<b>84.90</b>
Z300431	½" sweat	1.0	75 psi	1.0	<b>79.60</b>
Z300432	½" sweat	2.5	50 psi	1.0	<b>79.60</b>
Z307433*	½" sweat <b>LF</b>	3.5	30 psi	1.0	<b>103.30</b>
Z300512	¾" NPT	2.5	50 psi	1.2	<b>106.10</b>
Z300513	¾" NPT	3.5	30 psi	1.2	<b>106.10</b>
Z300515	¾" NPT	5.0	25 psi	1.2	<b>106.10</b>
Z300517	¾" NPT	7.5	20 psi	1.2	<b>106.10</b>
Z300532	¾" sweat	2.5	50 psi	1.1	<b>98.40</b>
Z300533	¾" sweat	3.5	30 psi	1.1	<b>98.40</b>
Z300535	¾" sweat	5.0	25 psi	1.1	<b>98.40</b>
Z307537*	¾" sweat <b>LF</b>	7.5	20 psi	1.0	<b>121.90</b>
Z300617	1" NPT	7.5	20 psi	1.3	<b>159.20</b>
Z300635	1" sweat	5.0	25 psi	1.2	<b>148.40</b>
Z300637	1" sweat	7.5	20 psi	1.2	<b>148.40</b>
Z300737	1¼" sweat	7.5	20 psi	1.3	<b>180.20</b>
Z300687**	1" male union	7.5	20 psi	1.2	<b>111.00</b>

\***LF** Low-lead brass body.

\*\* Presscon fitting body.

## NA605



Wall transformer.  
Input voltage: 120 V AC  
Output voltage: 24 V AC.  
Power output: 40 VA.  
Agency approval: cULUS

Code	Description	Lbs	USD
<b>NA605010</b>	24 VAC wall transformer	1.0	<b>46.60</b>

## ZONE SWITCHING RELAY



Certified to CSA C22-2 No.24  
Conforms to UL Standard 873

### ZSR Z-one Relay

tech. broch. 01284

The ZSR series is multi-zone pump and boiler operating control for multiple zone hydronic heating systems. The ZSR series interfaces with low voltage thermostats, or any other low voltage controllers having a switching action. The ZSR series controls up to 3, 4, 5 or 6 heating circulator pumps, depending on model selected, a primary pump and has LED indicators to provide functional status and easy system troubleshooting. In addition, a primary pump system circulator is switched on whenever any zone calls for heat.

Power supply: 120 VAC, 50/60 Hz

Transformer voltage: 24 VAC

Maximum transformer load: 12 VA (ZSR103/4), 20 VA (ZSR106)


Electrical switch rating: 20A max combined

Electrical switch rating pump output: 120 VAC, 5A each

Dry contact rating, ZR/ZC, DHW, XX: 120 VAC max, 2A each

Replaceable fuses: Type 2AG, 5A slow blow

Illustrative wiring diagram, consult wiring guide for additional wiring diagrams.

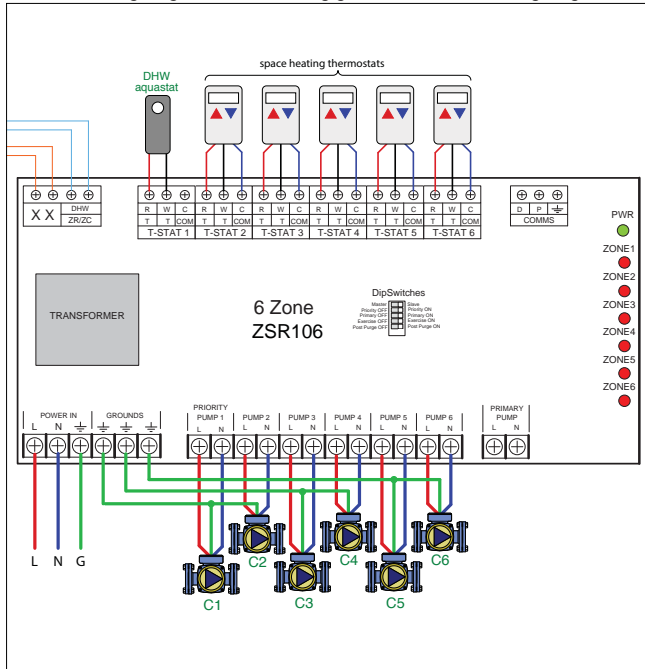

Code	Description	Lbs	USD
<b>ZSR103</b>	3 zone pump control	3.2	<b>375.00</b>
<b>ZSR104</b>	4 zone pump control	3.2	<b>440.00</b>
<b>ZSR106</b>	6 zone pump control	3.2	<b>540.00</b>

### ZSR101 tech. broch. 01285 Z-one Relay



The ZSR101 single zone switching relay is operated by low voltage thermostats. The ZSR101 single zone switching relay incorporates Power In, Relay 1 and Relay 2 connection terminals.

Power Supply: 120 VAC, 50/60 Hz

Transformer Voltage: 24 VAC

Maximum transformer load: 12 VA

Switch Rating: 10A Max Combined

Replaceable Fuses: Type 2AG, 5A



Certified to CSA C22-2 No.24  
Conforms to UL Standard 873

## Z-ONE RELAY FUSES

Code	Description	Lbs	USD
<b>NA10342</b>	Spare fuse (package of 5)	0.1	<b>15.00</b>

Code	Description	Lbs	USD
<b>ZSR101</b>	Single zone relay	1.1	<b>160.00</b>



## ZONE SWITCHING RELAY



Certified to CSA C22-2 No.24  
Conforms to UL Standard 873

### ZVR Z-one Relay

tech. broch. 01286

The ZVR series is a multi-zone valve relay and boiler operating control for multiple zone hydronic heating systems. The ZVR series interfaces with low voltage thermostats, or any other low voltage controllers having a switching action. The ZVR series controls up to 3, 4, 5 or 6 zones, depending on model selected. In addition, a system circulator pump and secondary pump is turned on whenever any zone calls for heat. LED indicators provide functional status and easy system troubleshooting. The ZVR series is a perfect match with Caleffi's Z-one™ motorized zone valves.

Power supply: 120 VAC, 50/60 Hz

Transformer voltage: 24 VAC

Maximum transformer load: 40 VA (ZVR103/4), 80 VA (ZVR106)

Electrical switch rating: 20A Max Combined

Electrical switch rating, ZR/ZC, DHW, XX: 120 VAC, 2A each


Electrical switch rating pumps: 120 VAC, 5A each

Resettable Fuse: automatic

High Capacity 40 VA Transformer standard for 3 and 4 zone models-  
expandable to 80 VA, and 80 VA for the 6 zone model

Code	Description	Lbs	USD
<b>ZVR103</b>	3 zone valve control	3.2	<b>285.00</b>
<b>ZVR104</b>	4 zone valve control	3.2	<b>340.00</b>
<b>ZVR106</b>	6 zone valve control	3.2	<b>440.00</b>
<b>NA10343</b>	Expansion transformer	0.1	<b>90.00</b>

Illustrative wiring diagram, consult wiring guide for additional wiring diagrams.

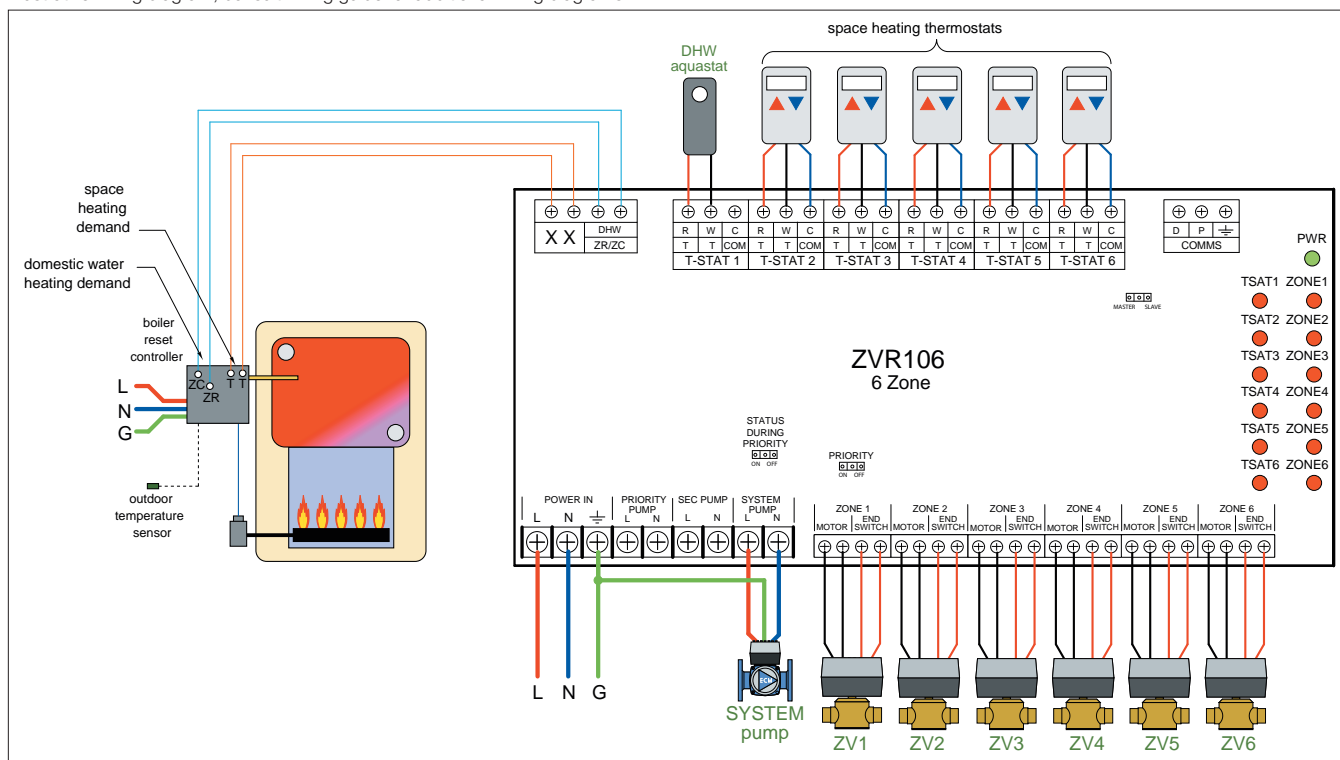

## MOTORIZED BALL ZONE VALVES HIGH-FLOW, HIGH CLOSE-OFF



### 6442 tech. broch. 01131 2-way Straight

Two-way motorized ball zone valve.  
Straight.  
Max.  $\Delta P$  close-off pressure: 150 psi.  
Temperature range: 20°—230°F.  
Power supply: 24 VAC.  
Power consumption: 4 VA.  
Rating of micro-switch contacts: 5 A (24 V).  
3-wire control.  
36" wire lead connection.

Code	Description	Cv	Lbs	USD
644249A	½" sweat	13	2.3	<b>411.50</b>
644256A	¾" press	13	2.3	<b>464.80</b>
644259A	¾" sweat	13	2.3	<b>425.10</b>
644269A	1" sweat	13	2.3	<b>452.70</b>
644240A	½" NPT	13	2.3	<b>418.30</b>
644250A	¾" NPT	13	2.3	<b>432.10</b>
644260A	1" NPT	13	2.3	<b>459.50</b>



### 6443..3BY tech. broch. 01131 3-way By-pass

Three-way motorized ball zone valve.  
By-pass.  
Max.  $\Delta P$  close-off pressure: 150 psi.  
Temperature range: 20°—230°F.  
Power supply: 24 VAC.  
Power consumption: 4 VA.  
Rating of micro-switch contacts: 5 A (24 V).  
3-wire control.  
2.1 Cv in by-pass mode.  
36" wire lead connection.




Code	Description	Cv	Lbs	USD
644349A 3BY	½" sweat	12	2.5	<b>445.70</b>
644356A 3BY	¾" press	12	2.5	<b>477.80</b>
644359A 3BY	¾" sweat	12	2.5	<b>459.50</b>
644369A 3BY	1" sweat	12	2.5	<b>487.00</b>
644340A 3BY	½" NPT	12	2.5	<b>452.70</b>
644350A 3BY	¾" NPT	12	2.5	<b>466.30</b>
644360A 3BY	1" NPT	12	2.5	<b>493.70</b>



### 6440 tech. broch. 01131 24 V 3-wire control

Actuator fits 6442 and 6443 series.  
Power supply: 24 VAC.  
Power consumption: 4 VA.  
Rating of micro-switch contacts: 5 A (24 V).  
Operating time: 40 s (90° rotation).  
Length of supply cable: 36".

Code	Description	Lbs	USD
644004	24 VAC	1.0	<b>329.30</b>

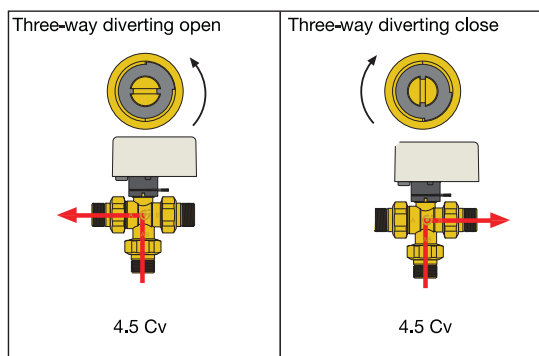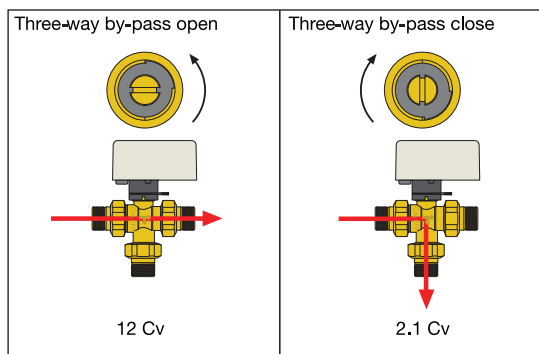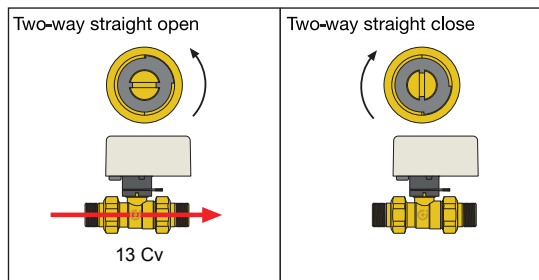


### 6443 tech. broch. 01131 3-way Diverting

Three-way motorized ball zone valve.  
Diverting.  
Max.  $\Delta P$  close-off pressure: 150 psi.  
Temperature range: 20°—230°F.  
Power supply: 24 VAC.  
Power consumption: 4 VA.  
Rating of micro-switch contacts: 5 A (24 V).  
3-wire control.  
36" wire lead connection.

Code	Description	Cv	Lbs	USD
644349A	½" sweat	4.5	2.5	<b>445.70</b>
644356A	¾" press	4.5	2.5	<b>477.80</b>
644359A	¾" sweat	4.5	2.5	<b>459.50</b>
644369A	1" sweat	4.5	2.5	<b>487.00</b>
644340A	½" NPT	4.5	2.5	<b>452.70</b>
644350A	¾" NPT	4.5	2.5	<b>466.30</b>
644360A	1" NPT	4.5	2.5	<b>493.70</b>

## TEMPERATURE MIXING STATIONS AND DISTRIBUTION MANIFOLDS

This diagram is an example

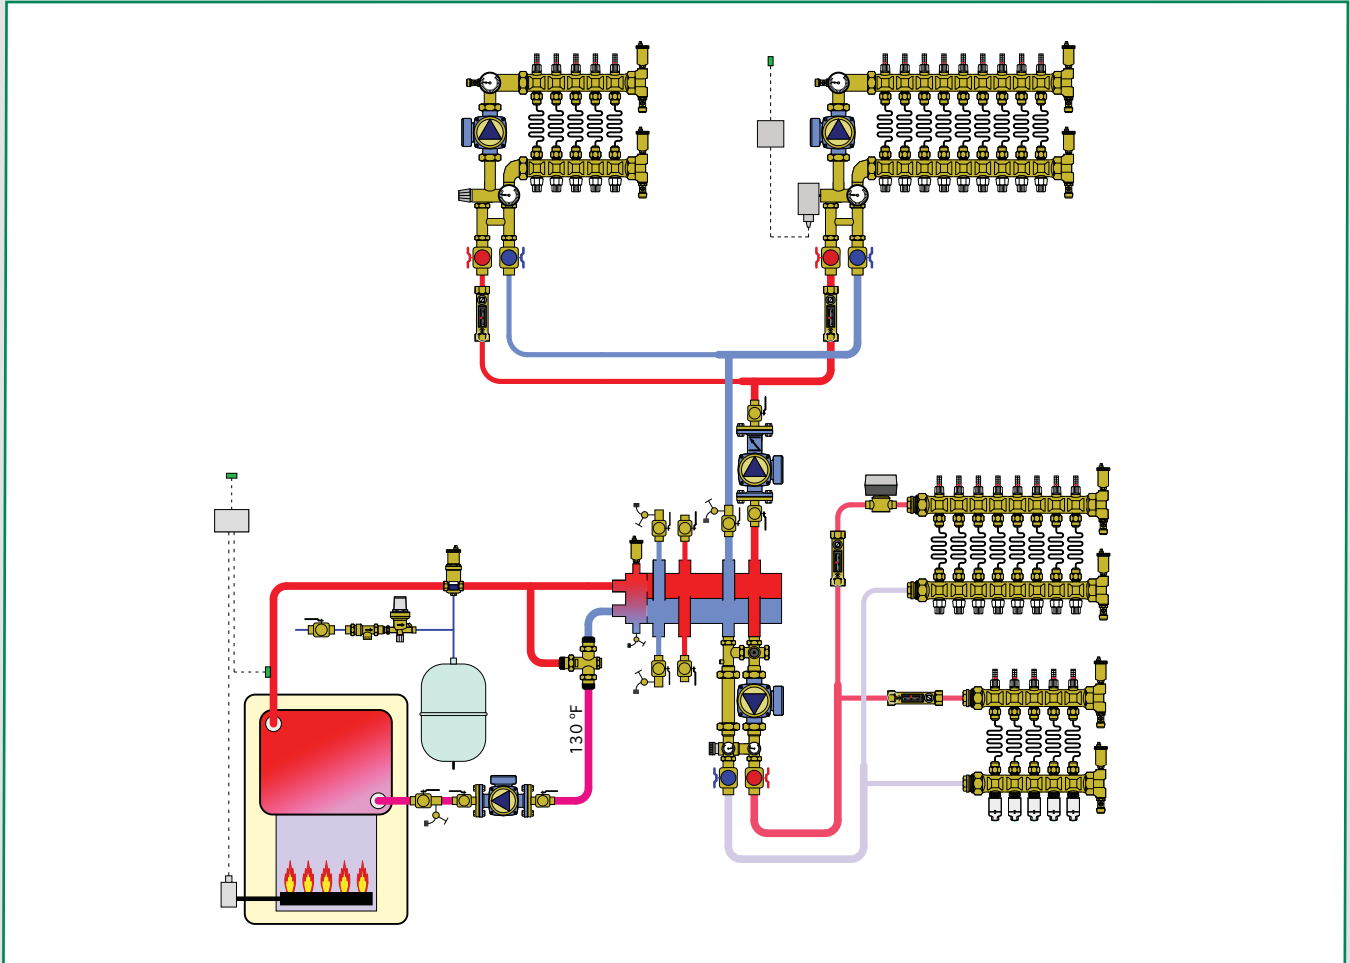

5

Thermostatic fixed point mixing unit for HydroLink™, HydroMixer™

Motorized temperature mixing unit for HydroLink™, HydroMixer™

Motorized temperature mixing stations

Thermostatic mixing stations

Brass distribution manifolds, TwistFlow™

Distribution manifolds

Manifold mixing stations

Boxes for distribution manifolds

Fittings for distribution manifolds and mixing stations

Accessories

Fill and flush cart

## PUMP & VALVE TEMPERATURE MIXING UNITS



### 163 HydroMixer™

 tech. broch. 01121

Thermostatic fixed temperature mixing unit with insulation. Compatible with 559 HydroLink™ series. Includes Grundfos UPS 15-58 three speed pump. Differential pressure by-pass valve adjustable from 1.5 to 8.5 psi. Temperature gauges. Shut-off ball valves. 1" NPT female union inlet fittings. Max working pressure: 145 psi. Adjustable range: 80–130°F. Power supply: 115 V 50/60 Hz.




### 165 HydroMixer™

 tech. broch. 01237

Injection pump mixing unit with insulation. Grundfos UPS 15-58 three speed pump. Grundfos Alpha 25-55U pump. Temperature gauges. Shut-off ball valves. Compatible with 5599 Hydrolink™ series Male union connections (select top and bottom fitting sets on page 35). Max working pressure: 145 psi. Max. working temperature: 212°F. Power supply: 115 V 50/60 Hz.

Code	Description	Lbs	USD
163600A	1" NPT outlet for right side flow	21	<b>1,890.00</b>
163610A	1" NPT outlet for left side flow	21	<b>1,890.00</b>

Code	Description	Lbs	USD
165600A	Dual line with 15-58 pump on right	21	<b>1,420.00</b>
165610A	Dual line with 15-58 pump on left	21	<b>1,420.00</b>
165602A	Dual line with Alpha pump on right	21	<b>1,735.00</b>
165612A	Dual line with Alpha pump on left	21	<b>1,735.00</b>

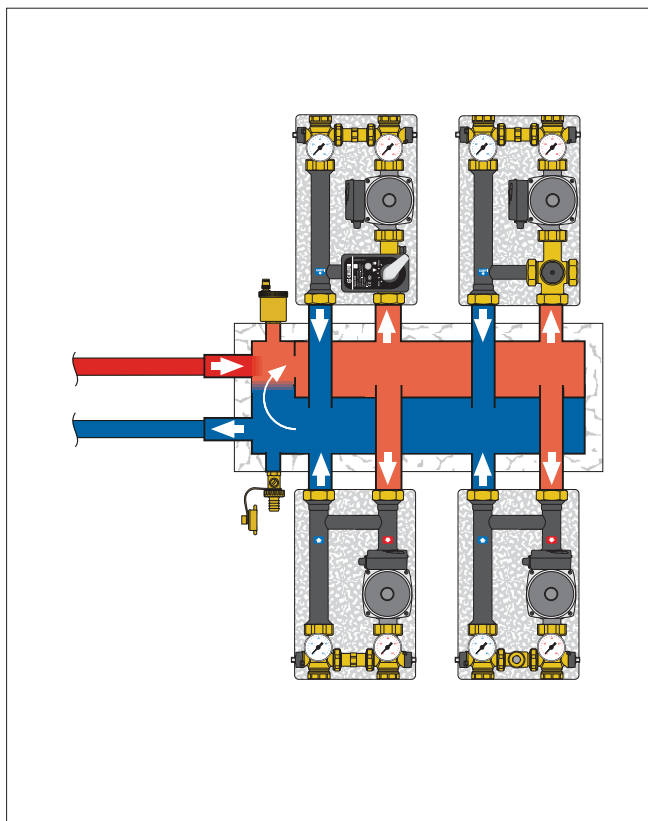

Wall bracket fits 165, 166 and 167 series.

Code	Description	Lbs	USD
165001	Wall bracket	1.0	<b>66.20</b>



## PUMP & VALVE TEMPERATURE MIXING UNITS



### 166 HydroMixer™

tech. broch. 01238

Thermostatic fixed temperature mixing unit with insulation.  
Grundfos UPS 15-58 three speed pump.  
Grundfos Alpha 25-55U pump.  
Temperature gauges.  
Shut-off ball valves.  
Compatible with 5599 Hydrolink™ series Male union connections (select top and bottom fitting sets below).  
Max working pressure: 145 psi.  
Adjustable range: 80—125°F.  
Power supply: 115 V 50/60 Hz.



### 167 HydroMixer™

tech. broch. 01239

Motorized temperature mixing unit with insulation. Three-point floating 24 VAC actuator for use with separately-sourced outdoor reset controller.  
Grundfos UPS 15-58 three speed pump.  
Grundfos Alpha 25-55U pump.  
Temperature gauges.  
Shut-off ball valves.  
Compatible with 5599 Hydrolink™ series Male union connections (select top and bottom fitting sets below).  
Max working pressure: 145 psi.  
Primary inlet temperature range: 40-212°F  
Power supply: 115 V 50/60 Hz.  
Valve actuator: 24 V AC

Code	Description	Lbs	USD
<b>166600A</b>	Dual line with 15-58 pump on right	22	<b>1,735.00</b>
<b>166610A</b>	Dual line with 15-58 pump on left	22	<b>1,735.00</b>
<b>166602A</b>	Dual line with Alpha pump on right	22	<b>2,050.00</b>
<b>166612A</b>	Dual line with Alpha pump on left	22	<b>2,050.00</b>

Code	Description	Lbs	USD
<b>167600A</b>	Dual line with 15-58 pump on right	23	<b>2,050.00</b>
<b>167610A</b>	Dual line with 15-58 pump on left	23	<b>2,050.00</b>
<b>167602A</b>	Dual line with Alpha pump on right	23	<b>2,365.00</b>
<b>167612A</b>	Dual line with Alpha pump on left	23	<b>2,365.00</b>



Optional differential pressure by-pass valve fits 165, 166 and 167 series.

Code	Description	Lbs	USD
<b>519006</b>	Differential pressure by-pass valve	1.0	<b>89.30</b>



Top outlet fitting set fits 165, 166, 167 series. Includes (2) 1¼" union nuts, (2) tail pieces and (2) washers. Will not fit bottom inlet thread.

Code	Description	Lbs	USD
<b>NA16069</b>	1" sweat outlet union fittings	1.0	<b>81.50</b>



Bottom Inlet fitting set fit 165, 166, 167 series. Includes (2) 1½" union nuts, (2) tail pieces and (2) washers. Will not fit top outlet thread.

Code	Description	Lbs	USD
<b>NA16169</b>	1" sweat outlet union fittings	1.0	<b>82.50</b>




Top outlet fitting set fits 165, 166, 167 series. Includes (2) 1¼" union nuts, (2) tail pieces and (2) washers. Will not fit bottom inlet thread.

Code	Description	Lbs	USD
<b>NA16060</b>	1" NPT M outlet union fitting	1.0	<b>92.00</b>



Bottom Inlet fitting set fit 165, 166, 167 series. Includes (2) 1½" union nuts, (2) tail pieces and (2) washers. Will not fit top outlet thread.

Code	Description	Lbs	USD
<b>NA16160</b>	1" NPT F inlet union fitting	1.0	<b>93.00</b>

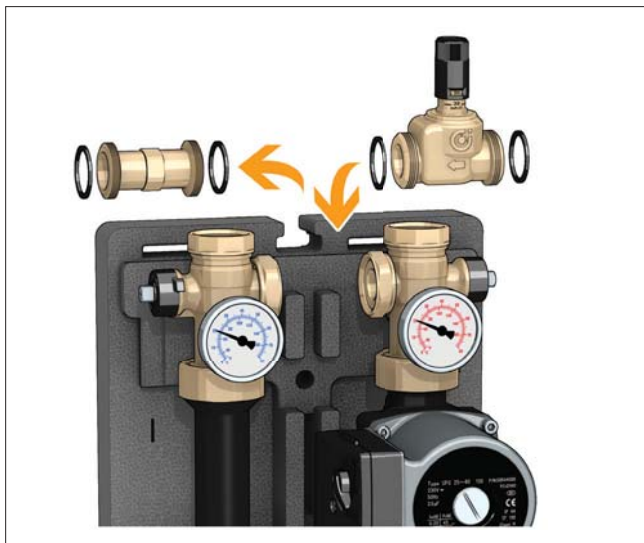




## MOTORIZED MANIFOLD MIXING STATIONS

171

### Manifold mixing station three speed pump

tech. broch. 01154

Pre-assembled manifold motorized modulating three-point floating actuator mixing station consisting of a supply distribution manifold complete with built-in sight flow gauges, adjustable balancing valves. Return manifold with built-in shutoff valves is suitable for thermo-electric actuators, includes Grundfos UPS 15–58 three-speed pump. Use with separately-sourced outdoor reset controller. 3/4" F NPT supply/return ball valves. Max. working pressure: 150 psi. Control temperature range: 70°–170°F. Primary inlet max. temperature: 40°–210°F. Outlet center distance: 2 in.

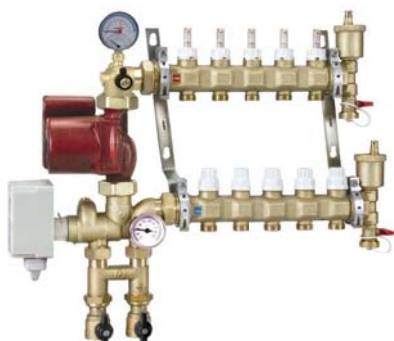

Code	Description	UPS Pump	No.	Outlets	Lbs	USD
1715C1A	3/4"	15-58	3	3/4" M	20	2,011.00
1715D1A	3/4"	15-58	4	3/4" M	21	2,112.00
1715E1A	3/4"	15-58	5	3/4" M	23	2,214.00
1715F1A	3/4"	15-58	6	3/4" M	25	2,316.00
1715G1A	3/4"	15-58	7	3/4" M	27	2,417.00
1715H1A	3/4"	15-58	8	3/4" M	28	2,519.00
1715I1A	3/4"	15-58	9	3/4" M	29	2,621.00
1715L1A	3/4"	15-58	10	3/4" M	31	2,722.00
1715M1A	3/4"	15-58	11	3/4" M	33	2,824.00
1715N1A	3/4"	15-58	12	3/4" M	34	2,926.00
1715O1A	3/4"	15-58	13	3/4" M	36	3,027.00

171

### Manifold mixing station high efficiency pump


tech. broch. 01154

Pre-assembled motorized manifold mixing station complete with three-point floating type actuator for use with separately-sourced outdoor reset controller. Consisting of a supply distribution manifold complete with built-in sight flow gauges, adjustable balancing valves. Return manifold with built-in shutoff valves is suitable for thermo-electric actuators, includes Grundfos Alpha 25-55U high efficiency pump. 3/4" F NPT supply/return ball valves. Max. working pressure: 150 psi. Control temperature range: 70°–170°F. Primary inlet max. temperature: 40°–210°F. Outlet center distance: 2 in.



Code	Description	Alpha Pump	No.	Outlets	Lbs	USD
1715C1AHE	3/4"	25-55U	3	3/4" M	20	2,326.00
1715D1AHE	3/4"	25-55U	4	3/4" M	21	2,427.00
1715E1AHE	3/4"	25-55U	5	3/4" M	23	2,529.00
1715F1AHE	3/4"	25-55U	6	3/4" M	25	2,631.00
1715G1AHE	3/4"	25-55U	7	3/4" M	27	2,732.00
1715H1AHE	3/4"	25-55U	8	3/4" M	28	2,834.00
1715I1AHE	3/4"	25-55U	9	3/4" M	29	2,936.00
1715L1AHE	3/4"	25-55U	10	3/4" M	31	3,037.00
1715M1AHE	3/4"	25-55U	11	3/4" M	33	3,139.00
1715N1AHE	3/4"	25-55U	12	3/4" M	34	3,241.00
1715O1AHE	3/4"	25-55U	13	3/4" M	36	3,342.00

Item	Description	Symbol
1	Three-way mixing valve	(M)
2	Three-point floating actuator	(X)
3	Three-speed circulation pump UPS 15-58	(P)
4	Top elbow with supply temperature and pressure gauge	(G)
5	Purge valve	(V)
6	Supply temperature and pressure gauge	(G)
7	Return temperature gauge	(G)
8	Primary circuit shut-off valves	(V)
9	Primary circuit hydraulic separator with check valve	(S)

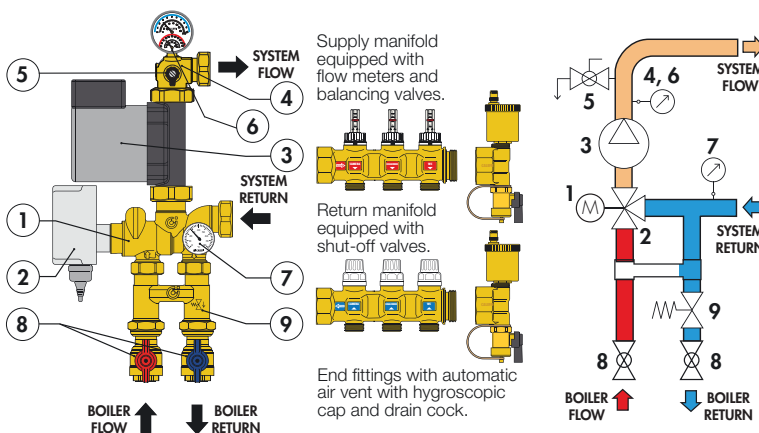



## THERMOSTATIC MANIFOLD MIXING STATIONS

### 172 Manifold mixing station three speed pump

tech. broch. 01155

Pre-assembled thermostatic manifold mixing station consisting of a supply distribution manifold complete with built-in sight flow gauges, adjustable balancing valves. Return manifold with built-in shutoff valves is suitable for thermo-electric actuators. Complete with built-in sensor to keep flow temperature at constant set value.

Includes Grundfos UPS 15—58 three-speed pump.

¾" F NPT supply/return ball valves.

Max. working pressure: 150 psi.

Control temperature range: 80°—130°F

Primary inlet max. temperature: 195°F

Outlet center distance: 2 in.



Code	Description	UPS Pump	No.	Outlets	Lbs	USD
1725C1A	¾"	15-58	3	¾" M	20	1,576.00
1725D1A	¾"	15-58	4	¾" M	21	1,678.00
1725E1A	¾"	15-58	5	¾" M	23	1,779.00
1725F1A	¾"	15-58	6	¾" M	25	1,881.00
1725G1A	¾"	15-58	7	¾" M	27	1,983.00
1725H1A	¾"	15-58	8	¾" M	28	2,084.00
1725I1A	¾"	15-58	9	¾" M	29	2,186.00
1725L1A	¾"	15-58	10	¾" M	31	2,288.00
1725M1A	¾"	15-58	11	¾" M	33	2,389.00
1725N1A	¾"	15-58	12	¾" M	34	2,491.00
1725O1A	¾"	15-58	13	¾" M	36	2,592.00

### 172 Manifold mixing station high efficiency pump

tech. broch. 01155

Pre-assembled thermostatic manifold mixing station consisting of a supply distribution manifold complete with built-in sight flow gauges, adjustable balancing valves. Return manifold with built-in shutoff valves is suitable for thermo-electric actuators. Complete with built-in sensor to keep flow temperature at constant set value.

Includes Grundfos Alpha 25-55U pump.

¾" F NPT supply/return ball valves.

Max. working pressure: 150 psi.

Control temperature range: 80°—130°F


Primary inlet max. temperature: 195°F

Outlet center distance: 2 in.



Code	Description	Alpha Pump	No.	Outlets	Lbs	USD
1725C1AHE	¾"	25-55U	3	¾" M	20	1,891.00
1725D1AHE	¾"	25-55U	4	¾" M	21	1,993.00
1725E1AHE	¾"	25-55U	5	¾" M	23	2,094.00
1725F1AHE	¾"	25-55U	6	¾" M	25	2,196.00
1725G1AHE	¾"	25-55U	7	¾" M	27	2,298.00
1725H1AHE	¾"	25-55U	8	¾" M	28	2,399.00
1725I1AHE	¾"	25-55U	9	¾" M	29	2,501.00
1725L1AHE	¾"	25-55U	10	¾" M	31	2,603.00
1725M1AHE	¾"	25-55U	11	¾" M	33	2,704.00
1725N1AHE	¾"	25-55U	12	¾" M	34	2,806.00
1725O1AHE	¾"	25-55U	13	¾" M	36	2,907.00


Item	Description	Symbol
1	Circulation pump UPS 15-58 pictured	
2	Top elbow with supply temperature and pressure gauge	
3	Purge valve	
4	Supply temperature and pressure gauge	
5	Return temperature gauge	
6	Primary circuit shut-off valves	
7	Primary circuit hydraulic separator with check valve	
8	Thermostatic three-way mixing valve with built-in sensor	

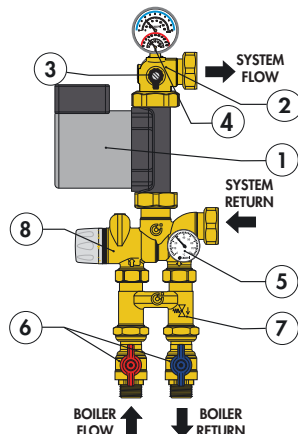

Supply manifold equipped with flow meters and balancing valves.

Return manifold equipped with shut-off valves.

End fittings with automatic air vent with hygroscopic cap and drain cock.

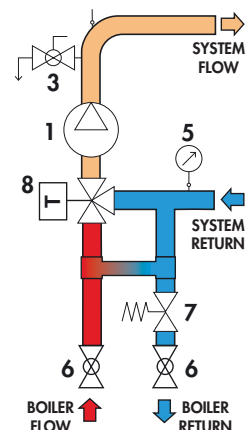

## BRASS DISTRIBUTION MANIFOLDS

### 668S1 TwistFlow™ Assembly

tech. broch. 01170

Pre-assembled radiant manifold consisting of return distribution manifold complete with built-in shut-off valves suitable for thermo-electric actuator and supply distribution manifold complete with built-in sight flow meters and balancing valves with 2" gauges 30—210°F scale.

1" or 1¼" NPT inlet ball valves.

Temperature gauges. **NEW**

Max. working pressure: 150 psi.

Max. working temperature: 180°F.

Max. peak temperature: 200°F.

Loop Cv: 1.23 (combined supply & return ports).

Flow meter scale: ¼ - 2 gpm.


Outlet center distance: 2 in.



Code	Description	No.	Outlets	Lbs	USD
6686C5S1A	1"	3	¾" M	17	<b>764.00</b>
6686D5S1A	1"	4	¾" M	18	<b>875.00</b>
6686E5S1A	1"	5	¾" M	19	<b>986.00</b>
6686F5S1A	1"	6	¾" M	21	<b>1,097.00</b>
6686G5S1A	1"	7	¾" M	23	<b>1,208.00</b>
6686H5S1A	1"	8	¾" M	24	<b>1,319.00</b>
6686I5S1A	1"	9	¾" M	26	<b>1,430.00</b>
6686L5S1A	1"	10	¾" M	28	<b>1,541.00</b>
6686M5S1A	1"	11	¾" M	29	<b>1,652.00</b>
6686N5S1A	1"	12	¾" M	31	<b>1,763.00</b>
6686O5S1A	1"	13	¾" M	33	<b>1,875.00</b>

6687C5S1A	1¼"	3	¾" M	17	<b>810.00</b>
6687D5S1A	1¼"	4	¾" M	18	<b>921.00</b>
6687E5S1A	1¼"	5	¾" M	19	<b>1,033.00</b>
6687F5S1A	1¼"	6	¾" M	21	<b>1,142.00</b>
6687G5S1A	1¼"	7	¾" M	23	<b>1,254.00</b>
6687H5S1A	1¼"	8	¾" M	24	<b>1,365.00</b>
6687I5S1A	1¼"	9	¾" M	26	<b>1,476.00</b>
6687L5S1A	1¼"	10	¾" M	28	<b>1,587.00</b>
6687M5S1A	1¼"	11	¾" M	29	<b>1,698.00</b>
6687N5S1A	1¼"	12	¾" M	31	<b>1,809.00</b>
6687O5S1A	1¼"	13	¾" M	33	<b>1,920.00</b>


Consult factory for inverted assembly options.

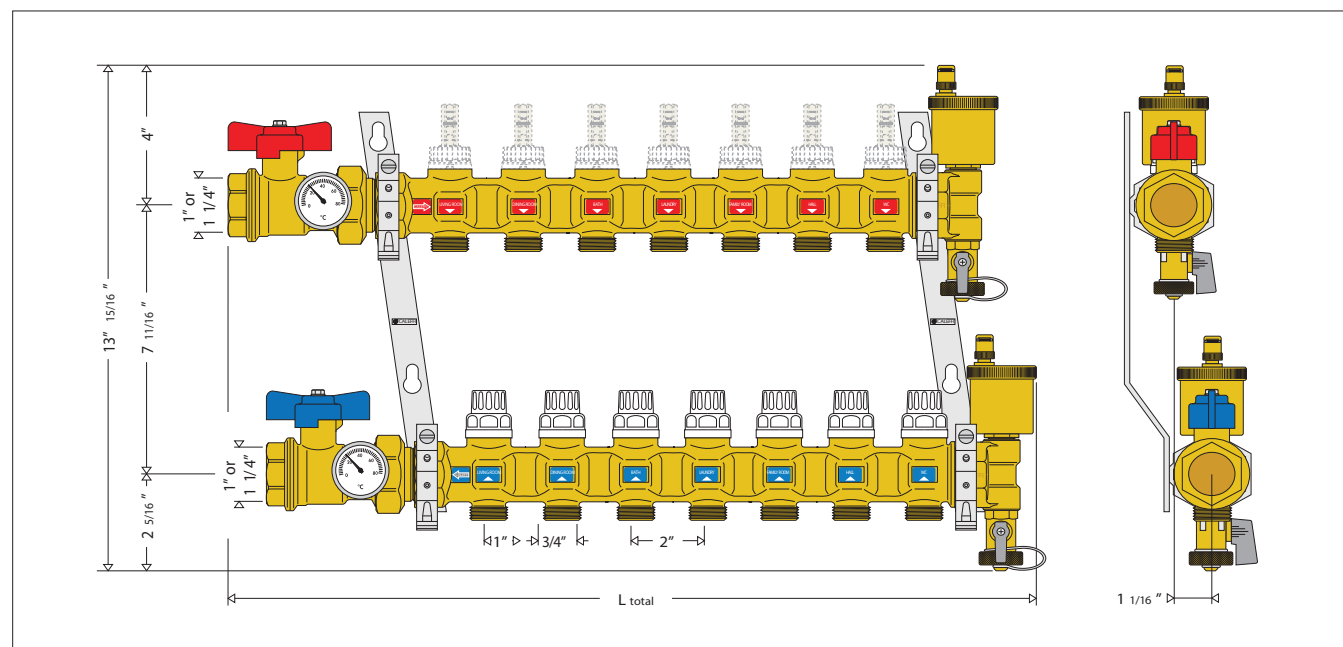

Code (1")	6686C5S1A	6686D5S1A	6686E5S1A	6686F5S1A	6686G5S1A	6686H5S1A	6686I5S1A	6686L5S1A	6686M5S1A	6686N5S1A	6686O5S1A
Code (1¼")	6687C5S1A	6687D5S1A	6687E5S1A	6687F5S1A	6687G5S1A	6687H5S1A	6687I5S1A	6687L5S1A	6687M5S1A	6687N5S1A	6687O5S1A
No. outlets	3	4	5	6	7	8	9	10	11	12	13
Total length	15 3/16"	17 1/8"	19"	21"	23"	25"	28 1/8"	30 1/8"	32 1/16"	34 1/16"	36"

## BRASS DISTRIBUTION MANIFOLDS

### Manifolds and accessories

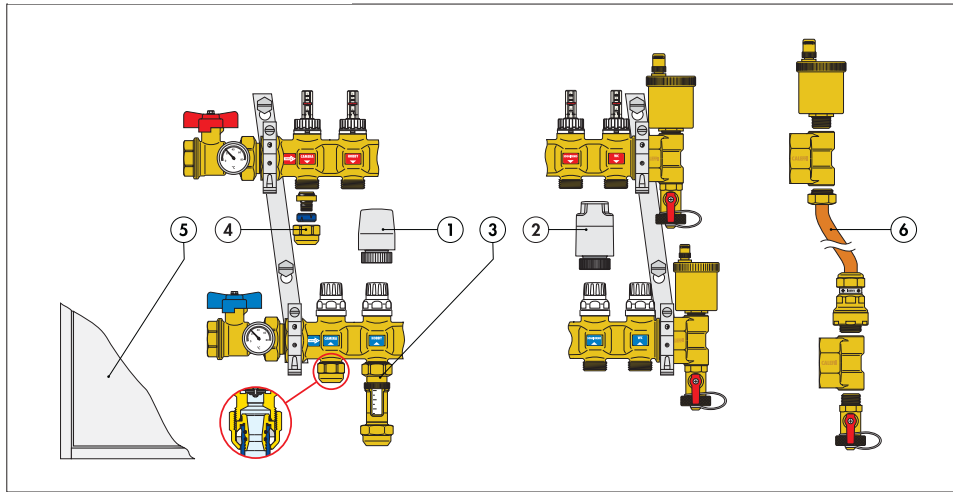





1. Thermo-electric actuator 6564 series
2. Thermo-electric actuator with manual open handle, 6563 series
3. Flow meter, code NA669
4. Self-adjusting Universal PEX fitting, 680, 682 series
5. Inspection wall box, 659 series
6. Differential by-pass kit, code 668000

### Flow rate adjustment and reading

Raise the block cover with the aid of a screwdriver and turn it over onto the flow meter. Adjust the flow rate of the single panels by turning the flow meter body acting on the built-in balancing valve.

The flow rate must be read off the graduated scale, expressed in gpm, printed on the flow meter.

After making all the adjustments, reposition and lock all the knobs in their seat to prevent tampering.



## DISTRIBUTION MANIFOLDS

**663**

 tech. broch. 01170

### Pre-assembled distribution assembly

Pre-assembled distribution assembly consisting of return distribution manifold complete with built-in shut-off valves suitable for thermo-electric actuator and supply distribution manifold complete with manually-adjustable balancing valves.

1" or 1½" NPT inlet ball valves.

Loop Cv: 2.3 (combined supply & return ports).

Max. working pressure: 150 psi.

Max. temperature: 210°F.

Outlet center distance: 2 in.




Code	Description	No.	Outlets	Lbs	USD
6636C5A	1"	3	¾" M	17	<b>625.00</b>
6636D5A	1"	4	¾" M	18	<b>722.00</b>
6636E5A	1"	5	¾" M	19	<b>819.00</b>
6636F5A	1"	6	¾" M	21	<b>916.00</b>
6636G5A	1"	7	¾" M	23	<b>1,013.00</b>
6636H5A	1"	8	¾" M	24	<b>1,111.00</b>
6636I5A	1"	9	¾" M	26	<b>1,208.00</b>
6636L5A	1"	10	¾" M	28	<b>1,305.00</b>
6636M5A	1"	11	¾" M	29	<b>1,402.00</b>
6636N5A	1"	12	¾" M	31	<b>1,499.00</b>
6636O5A	1"	13	¾" M	33	<b>1,596.00</b>
6636P5A	1"	14	¾" M	35	<b>1,875.00</b>

Consult factory for inverted assembly options.

Code	Description	No.	Outlets	Lbs	USD
6637C5A	1½"	3	¾" M	17	<b>666.00</b>
6637D5A	1½"	4	¾" M	18	<b>762.00</b>
6637E5A	1½"	5	¾" M	19	<b>859.00</b>
6637F5A	1½"	6	¾" M	21	<b>957.00</b>
6637G5A	1½"	7	¾" M	23	<b>1,054.00</b>
6637H5A	1½"	8	¾" M	24	<b>1,151.00</b>
6637I5A	1½"	9	¾" M	26	<b>1,248.00</b>
6637L5A	1½"	10	¾" M	28	<b>1,345.00</b>
6637M5A	1½"	11	¾" M	29	<b>1,442.00</b>
6637N5A	1½"	12	¾" M	31	<b>1,540.00</b>
6637O5A	1½"	13	¾" M	33	<b>1,637.00</b>
6637P5A	1½"	14	¾" M	35	<b>1,923.00</b>

Consult factory for inverted assembly options.

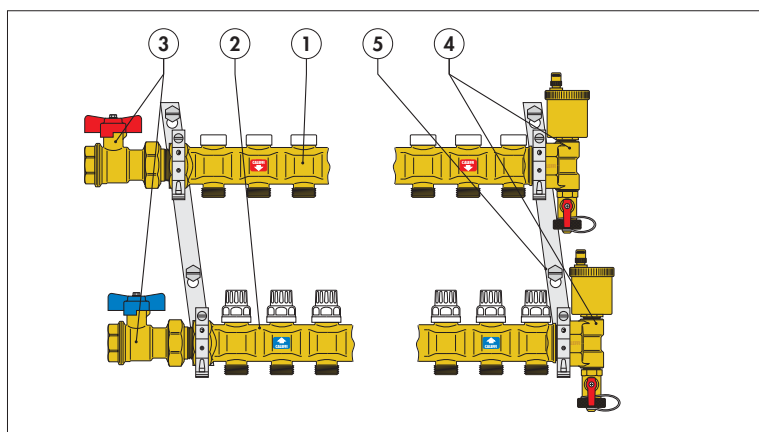

#### 663 manifold components

- 1 Supply manifold (complete with manually adjustable balancing valves only for 663 series).
- 2 Return manifold complete with shut-off valves that can be used with thermoelectric actuators.
- 3 Shut-off ball valves
- 4 End fittings consisting of a 3-way end fitting, automatic air vent valve and drain valve.
- 5 Pair of mounting brackets for use with series 659 boxes or direct wall installation.

## DISTRIBUTION MANIFOLDS

**592**

### Hi-Flow distribution assembly

(No shut-off or balancing valves)

Pre-assembled distribution assembly consisting of return distribution manifold and supply distribution manifold.

1½" NPT inlet ball valves.

Max. working pressure: 150 psi.


Max. working temperature: 210°F.

Loop Cv: 5.0

Outlet center distance: 2⅝ in.

Code	Description	No.	Outlets	Lbs	USD
<b>5927B5A</b>	1½"	2	¾" M	16	<b>510.00</b>
<b>5927C5A</b>	1½"	3	¾" M	17	<b>547.00</b>
<b>5927D5A</b>	1½"	4	¾" M	18	<b>572.00</b>
<b>5927E5A</b>	1½"	5	¾" M	19	<b>646.00</b>
<b>5927F5A</b>	1½"	6	¾" M	21	<b>683.00</b>
<b>5927G5A</b>	1½"	7	¾" M	23	<b>739.00</b>
<b>5927H5A</b>	1½"	8	¾" M	24	<b>804.00</b>

Consult factory for inverted assembly options.

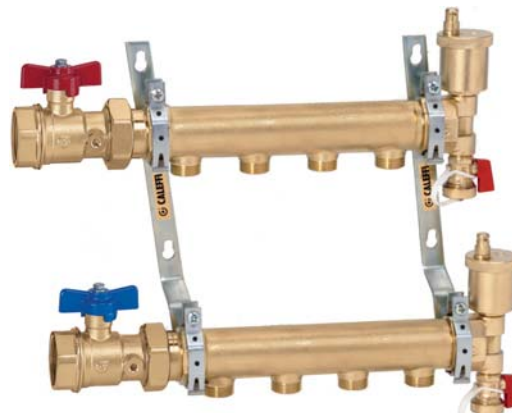

## MANIFOLD MIXING STATIONS



### Motorized mixing station

 tech. broch. 01154

Complete with three-point floating type actuator for use with separately-sourced outdoor reset controller.

For field assembly to a Caleffi radiant manifold assembly.

Grundfos UPS 15—58 three-speed pump or Alpha 25-55U.

1" NPT male adapters included to connect to manifold.

¾" NPT female riser connections.

Includes built-in hydraulic separator.

Code	Description	Lbs	USD
<b>NA17156HE</b>	Motorized mixing, Alpha 25-55U	5.3	<b>1,895.00</b>
<b>NA17156</b>	Motorized mixing, UPS 15-58	5.3	<b>1,580.00</b>



### Thermostatic mixing station

 tech. broch. 01155

For field assembly to a Caleffi radiant manifold assembly.

Grundfos UPS 15—58 three-speed pump or Alpha 25-55U.

1" NPT male adapters included to connect to manifold.

¾" NPT female riser connections.

Includes built-in hydraulic separator.

Code	Description	Lbs	USD
<b>NA17256HE</b>	Thermostatic mixing, Alpha 25-55U	4.1	<b>1,460.00</b>
<b>NA17256</b>	Thermostatic mixing, UPS 15-58	4.1	<b>1,145.00</b>



## BOXES FOR DISTRIBUTION MANIFOLDS



**659**

### Manifold cabinet


 tech. broch. 01170

Housing wall box fits manifolds 663 and 668S1 series.  
Adjustable depth: 4 3/8" — 5 1/2".  
Power coated painted 18 gauge sheet metal.  
With push-fit clamp.

Code	Description	H	Max Outlets	Lbs	USD
<b>659044</b>	16" width	20"	3	17	<b>403.30</b>
<b>659064</b>	24" width	20"	6	23	<b>438.80</b>
<b>659084</b>	32" width	20"	10	29	<b>517.00</b>
<b>659104</b>	40" width	20"	13	36	<b>595.00</b>
<b>659124</b>	48" width	20"	17	43	<b>672.00</b>

Rough opening dimensions

**659 series housing wall box dimension choice  
in accordance with the number of outlets**

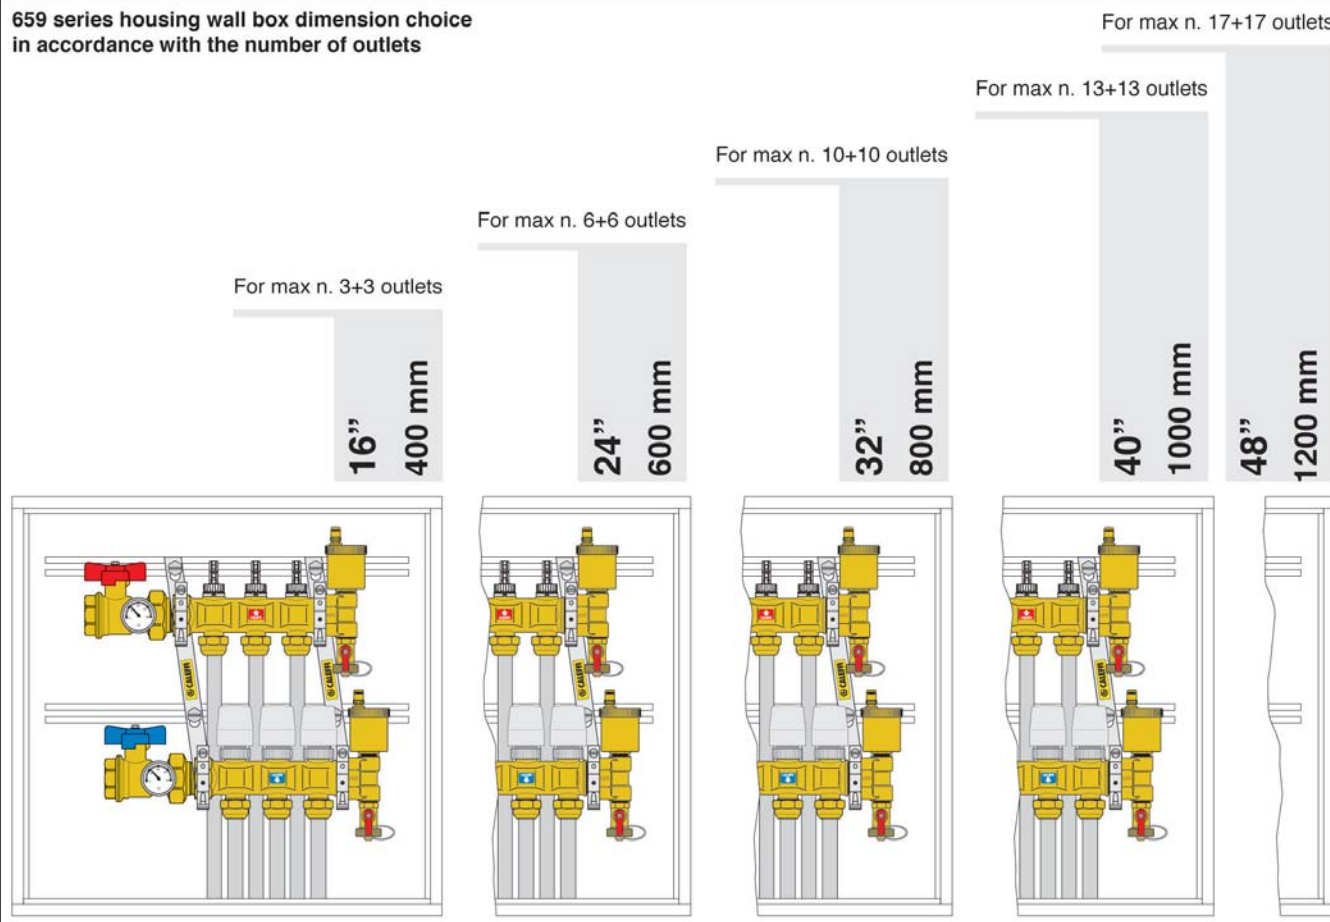



## FITTINGS FOR DISTRIBUTION MANIFOLDS AND MIXING STATIONS



(680504A shown)

### 680 Universal PEX fittings

tech. broch. 01170

680 series fittings are compatible with any ASTM F876 single layer PEX.  
Max. working pressure: 150 psi.  
Working temperature range for ASTM F876 PEX piping: 40—180°F.

Code	Description	Compression ring	Lbs	USD
680507	5/16" nominal PEX	Blue	2.0	12.40
680503A	3/8" nominal PEX	Black	2.0	12.40
680504A	1/2" nominal PEX	Blue	2.0	12.40
680555A	5/8" nominal PEX	Black	2.0	12.40
680505A	3/4" nominal PEX	Brass	2.0	12.40



(682530A shown)

### 682 Universal PEX-AL-PEX fittings

682 series fittings are compatible with any ASTM F1281 multilayer PEX-AL-PEX pipe.  
Max. working pressure: 150 psi.  
Working temperature range for ASTM F1281 PEX-AL-PEX piping: 40—200°F with tubing rated 200°F.

Code	Description	Lbs	USD
682530A	3/8" nominal PEX-AL-PEX	2.0	12.80
682540A	1/2" nominal PEX-AL-PEX	2.0	12.80
682545A	5/8" nominal PEX-AL-PEX	2.0	13.80
682550A	3/4" nominal PEX-AL-PEX	2.0	24.40

#### Construction details

There is a large variety of PEX and PEX-AL-PEX pipes available with a wide range of permissible tolerances. This fitting is designed to adapt to several pipe diameters tolerances. The innovative solution for mechanical fittings has been constructed so that the same fitting can be used for pipes with difference external diameters tolerances and differences on internal diameters tolerances while maintaining the nominal dimensions.

#### Resistance to pull out

This fitting offers a high degree of resistance to pull out of pipe. Its special clamping system makes it suitable for every application and ensures a leak tight fit.

#### Low pressure losses


The internal profile of the adapter (1) is shaped to obtain a Venturi effect when the fluid passes through, reducing pressure losses by 20% compared to a similar diameter.

#### Insulation ring

The fitting is equipped with a rubber insulation element (2) to prevent contact between the aluminium in PEX-AL-PEX pipe and the brass fitting, thus preventing galvanic corrosion generated by the two different metals.

#### Dual O-ring seal

The adapter is equipped with two O-ring seals (3) and (4) in EPDM to prevent leaks even when operating at high pressure.



### NA102

Sweat connection fitting fits 1/2" copper.  
Max. working pressure: 150 psi.  
Working temperature range: 41—250°F.  
Chrome plated nut.

Code	Description	Lbs	USD
NA10262	1/2" sweat	2.0	13.90



### NA103

NPT connection fitting.  
Max. working pressure: 150 psi.  
Working temperature range: 41—250°F.  
Chrome plated nut.

Code	Description	Lbs	USD
NA10313	1/2" NPT male	2.0	15.00



### 386

tech. broch. 01170

Cap to plug unused manifold outlets on 592, 663 and 668S1 series.

Code	Description	Lbs	USD
386500	3/4" straight thread	2.0	12.40



Double nipple for coupling PEX fittings.

Code	Description	Lbs	USD
942550	3/4" x 3/4" thread	0.4	15.50




**668**

tech. broch. 01170


Off-center by-pass assembly with fixed crack setting of 3.6 psi differential pressure.  
Max working pressure: 150 psi.  
Working temperature range: 15—230°F.

Code	Description	Lbs	USD
<b>668000</b>	1/2" x 1/2"	0.5	<b>117.80</b>

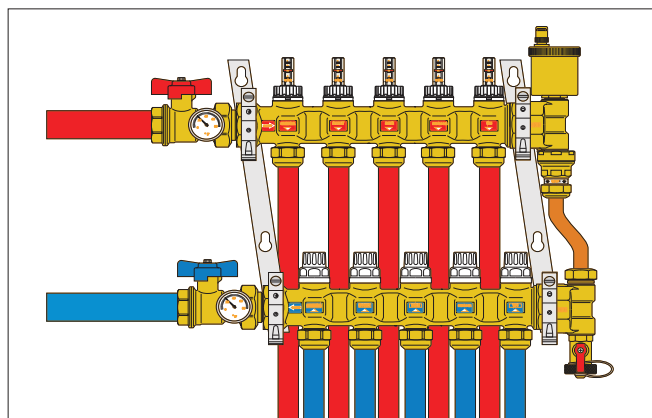

The by-pass valve contains a check valve connected to a contact spring. When the fixed setting pressure is reached, the valve disk gradually opens, recirculating the flow in proportion to the closing of the thermo-electric valves and maintaining a constant differential pressure in the manifold circuit.

The differential by-pass assembly features a fixed setting that cannot be changed. The small, compact size and offset connections makes this kit particularly easy to mount after installing thermo-electric valves on the manifold. It does not require a larger or deeper zone box than those used for normal manifolds.

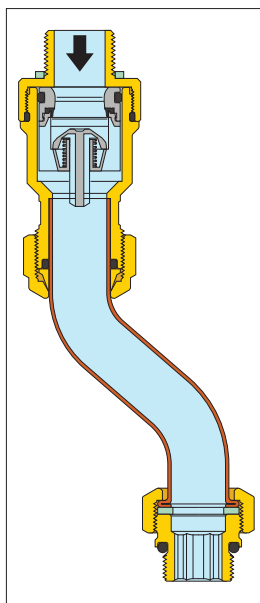

**6564**

tech. broch. 01198

Low current draw thermo-electric actuator for use with 663 and 668S1 series distribution manifolds.  
Hermetically sealed for upside down installation..  
Pop-up feature  
Power supply: 24 V AC/DC.  
Initial current draw: ≤ 250 mA.  
Power consumption: 3 W.  
Rating of micro-switch contacts: 5 A (24 V).  
31.5" wire lead connection.

Code	Description	Lbs	USD
<b>656404</b>	24 V AC/DC	0.4	<b>103.30</b>
<b>656414</b>	24 V AC/DC with micro-switch	0.4	<b>129.20</b>





**6563**  
**TwisTop™**

tech. broch. 01170

TwisTop™ thermo-electric actuator for use with return manifolds.  
Twist the top to manually open.  
Power supply: 24 V AC/DC.  
Initial current draw: 800 mA.  
Power consumption: 3 W.  
Rating of micro-switch contacts: 5 A (24 V).  
31.5" wire lead connection.  
US Patent 7,617,989 B2.

Code	Description	Lbs	USD
<b>656304</b>	24 V AC/DC	0.4	<b>137.70</b>
<b>656314</b>	24 V AC/DC with micro-switch	0.4	<b>163.40</b>
<b>656314R</b>	24 V AC/DC with micro-switch Rehau	0.4	<b>178.10</b>

**Simply twist to manually open actuator (and activate auxiliary switch on 656314). When power is applied, it returns to Auto position.**

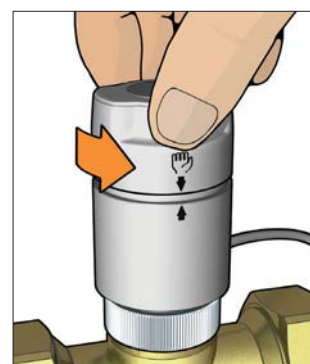

**Green ring indicates valve is open.**

## ACCESSORIES

Wrench for tightening PEX fitting to manifolds.



Code	Description	Lbs	USD
<b>387100</b>	26 mm x 30 mm	1.5	<b>54.00</b>

Replacement balance/flow meter fits 668S1 series manifold.  
Flow meter scale: ¼ — 2 gpm.



Code	Description	Lbs	USD
<b>F69600</b>	Fits 668S1 supply manifold	0.2	<b>36.30</b>



Replacement shut-off valve fits 668 S1 series manifold.

Code	Description	Lbs	USD
<b>F69590</b>	Fits 668 S1 return manifold	0.3	<b>16.20</b>



Replacement balancing valve fits 668 series manifold.

Code	Description	Lbs	USD
<b>69184</b>	Fits 668 manifolds	0.2	<b>25.30</b>



Replacement shut-off valve fits 668 series manifold.

Code	Description	Lbs	USD
<b>69122 CST</b>	Fits 668 return manifold	0.3	<b>16.20</b>



### 669

 tech. broch. 01170

Flow meter fits manifolds.  
Max: temperature: 180°F (669050).  
Max: temperature: 210°F (NA669 series).  
¾" straight male x ¾" straight female connections.

Code	Description	Lbs	USD
<b>669050</b>	1 — 4 LPM	0.4	<b>42.80</b>
<b>NA669150</b>	¼ — 1 GPM High Temp.	0.3	<b>42.80</b>
<b>NA669250</b>	½ — 2 GPM High Temp.	0.3	<b>42.80</b>



White replacement knob fits 663 and 668S1 series manifolds.

Code	Description	Lbs	USD
<b>449000</b>	Knob	0.5	<b>12.50</b>

### 5020

 tech. broch. 01090



Replacement air vent fits radiant manifolds.  
Brass body.  
Hygroscopic safety air vent cap.  
Max. working pressure: 150 psi  
Max discharge pressure: 60 psi  
Max. working temperature: 250°F.

Code	Description	Lbs	USD
<b>502043 CST</b>	½" straight thread	0.6	<b>31.90</b>



Plastic replacement/test cap fits 5020 series.


Code	Description	Lbs	USD
<b>R56214</b>	Vent cap	0.1	<b>2.60</b>

### 675

 tech. broch. 01170



Snap-on thermometer directly to PEX, PEX-AL-PEX and copper piping.



Code	Description	Lbs	USD
<b>675900A</b>	¾", ½" & ⅝" PEX & ½" copper	0.2	<b>13.50</b>
<b>R69413</b>	Syringe of thermo conductive paste	0.1	<b>9.50</b>



### 688

Temperature gauge with well pocket fitting for inserting into manifold ball valves.  
Working Temperature range: 30—210° F.  
Face dial diameter: 2".

Code	Description	Lbs	USD
<b>688003A</b>	Gauge with pocket well	0.2	<b>50.30</b>
<b>F11344</b>	Replacement pocket well, low lead	0.1	<b>5.00</b>
<b>F67037</b>	O-ring fits F11344	0.1	<b>1.15</b>

## FILL AND FLUSH CART

### NA25510 tech. broch. 01280

#### Fill and flush cart



The fill and flush pump cart is portable, pre-assembled and leak-tested for a safe, quick and clean way to fill and flush solar, geo thermal and hydronic systems.

Medium: water, glycol and cleaning fluids.

Tank: 13 gallon with dirt filter.

Max. tank medium temperature: 150°F.

Pump delivery flow: 1—13 gpm

Pump feet of head: 220

Max. pump pressure: 100 psi.

Pump power: ½ HP (120 V AC).

Isolating ball valves: ¾" garden hose thread.

Transfer hoses: 6' with ¾" GHT (2 ea).

Pressure gauge: 2" dial, 0—100 psi.

Dimensions: 48"H × 20"W × 18"D.


Code	Description	Lbs	USD
NA25510	Fill and flush cart	60	2,520.00

#### Operating principles

The fill and flush pump cart is portable, pre-assembled and leak-tested for a safe, quick and clean way to fill and flush solar, geothermal and hydronic heating systems. Pre-assembled with a leak test pressure gauge, the Fill and Flush cart makes it easy to test a system.


Connect the fill/purge valves to the fill and flush system, allow fluid to circulate and remove air and dirt in system. Pump system to desired pressure, use the liquid pressure gauge to observe system pressure. If the system holds its pressure, the system is leak free.

#### Dimensions:

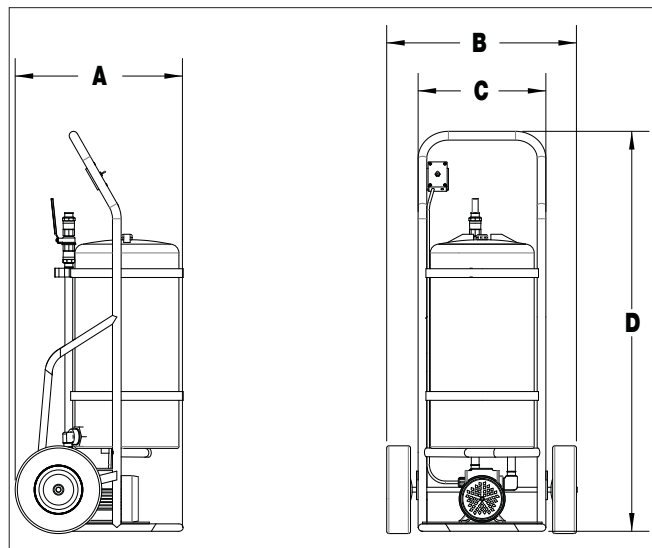


Code	A	B	C	D	Weight	Capacity
NA25510	20 ½"	20 ¼"	13 ¾"	46 ¾"	65 lbs.	13 gallon

#### Radiant

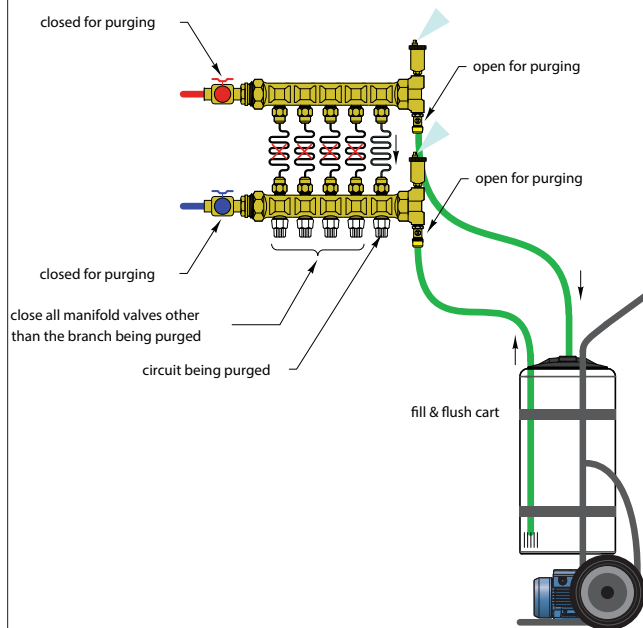


#### Hydronic

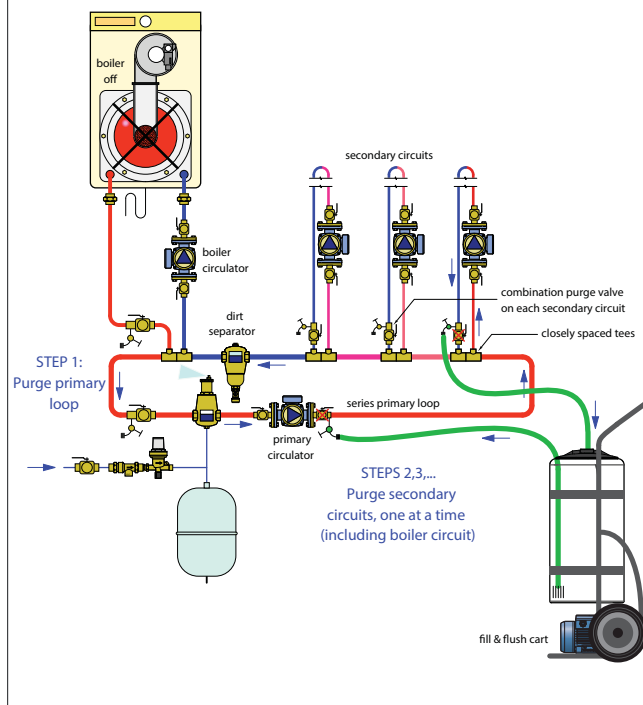

## MIXING VALVES FOR DOMESTIC WATER AND HYDRONICS SYSTEMS

This diagram is an example

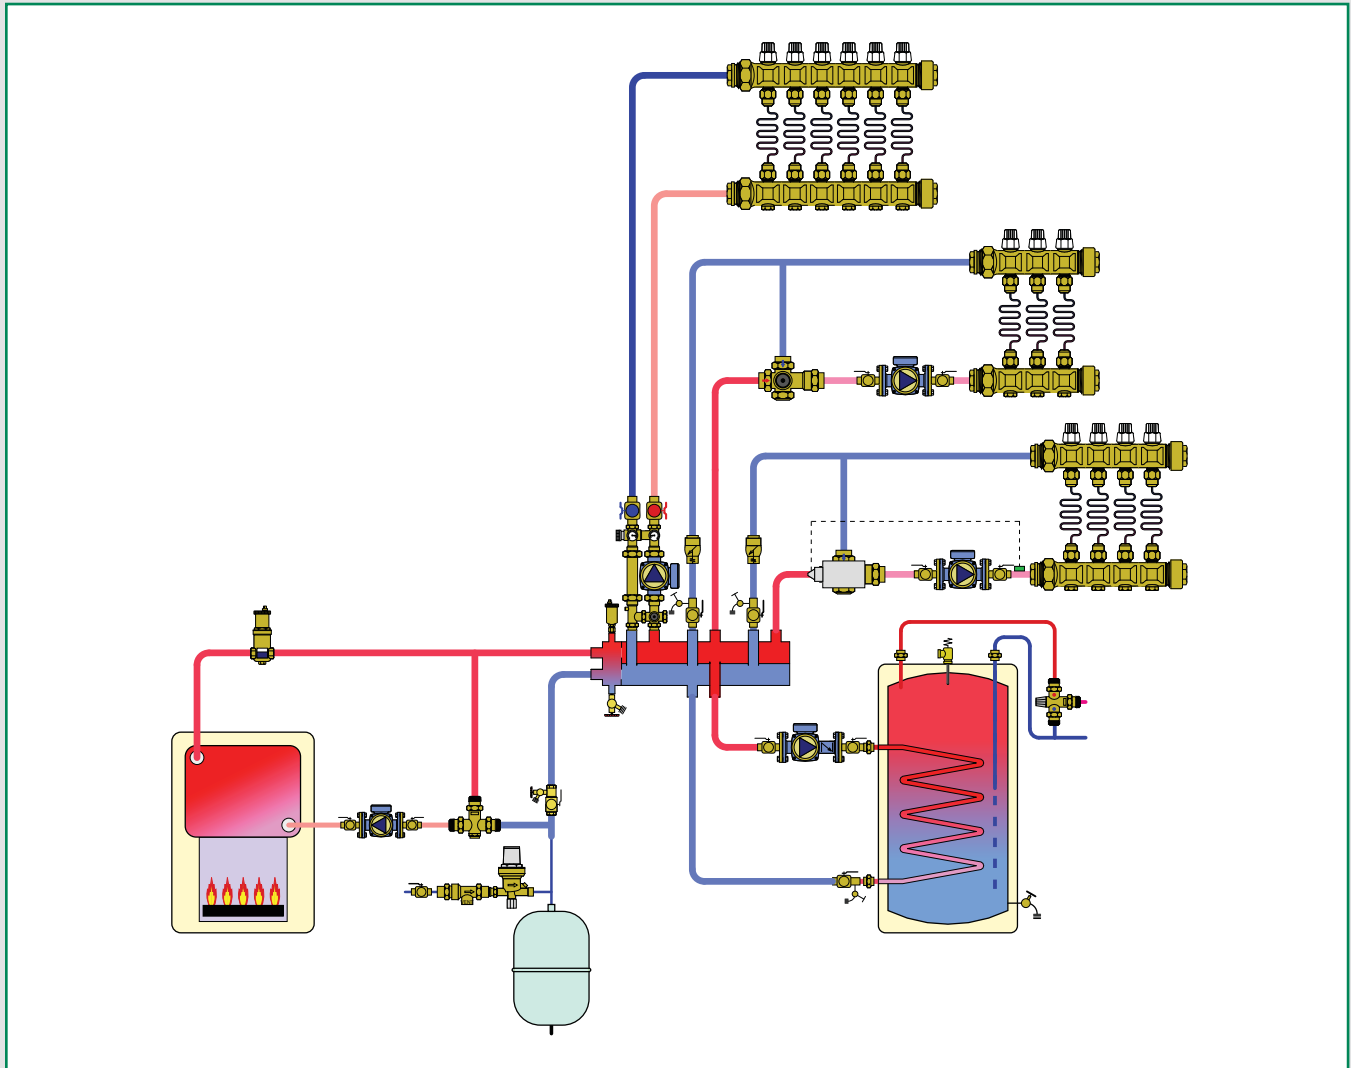

Low lead thermostatic mixing valves, MixCal™

Low lead scald protection thermostatic mixing valves

Low lead high flow thermostatic mixing valves

Boiler protection valves, ThermoMix™

## LOW LEAD THERMOSTATIC MIXING VALVES



### 521 MixCal™ Sweat

tech. broch. 01050

Adjustable thermostatic and pressure balanced mixing valve for point of distribution in domestic water systems and radiant hydronic heating systems. Low-lead brass body. Internal anti-scale materials. Locking set point knob. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 200°F. Adjustable range: 85—150°F. Min. flow for optimum performance: 1.3 gpm. Certified to: cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Cv	Lbs	USD
521409A	½" sweat	3	2.4	<b>248.20</b>
521409AC	½" sweat inlet check valves	3	2.4	<b>273.60</b>
521509A	¾" sweat	3	2.4	<b>259.50</b>
521509AC	¾" sweat inlet check valves	3	2.4	<b>296.60</b>
521609A	1" sweat	3	2.4	<b>309.10</b>
521609AC	1" sweat inlet check valves	3	2.4	<b>346.20</b>



### 521 MixCal™ Sweat

tech. broch. 01050

Adjustable thermostatic and pressure balanced mixing valve for point of distribution in domestic water systems and radiant hydronic heating systems. Low-lead brass body. Internal anti-scale materials. Locking set point knob. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 200°F. Adjustable range: 85—150°F. Min. flow for optimum performance: 1.3 gpm. Gauge scale: 30—210°F. Gauge accuracy: ± 6°F. Gauge dial: 2" diameter. Certified to: cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Cv	Lbs	USD
521419A	½" sweat	3	2.9	<b>294.40</b>
521419AC	½" sweat inlet check valves	3	2.9	<b>319.80</b>
521519A	¾" sweat	3	2.9	<b>305.70</b>
521519AC	¾" sweat inlet check valves	3	2.9	<b>342.60</b>
521619A	1" sweat	3	2.9	<b>352.00</b>
521619AC	1" sweat inlet check valves	3	2.9	<b>388.90</b>



### 521 MixCal™ NPT

tech. broch. 01050

Adjustable thermostatic and pressure balanced mixing valve for point of distribution in domestic water systems and radiant hydronic heating systems. Internal anti-scale materials. Locking set point knob. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 200°F. Adjustable range: 85—150°F. Min. flow for optimum performance: 1.3 gpm. Certified to: cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Cv	Lbs	USD
521400A	½" NPT male	3.2	2.4	<b>259.50</b>
521400AC	½" NPT male inlet check valves	3.2	2.4	<b>284.90</b>
521500A	¾" NPT male	3.2	2.4	<b>270.80</b>
521500AC	¾" NPT male inlet check valves	3.2	2.4	<b>307.90</b>
521600A	1" NPT male	3.2	2.4	<b>321.60</b>
521600AC	1" NPT male inlet check valves	3.2	2.4	<b>358.70</b>



### 521 MixCal™ NPT

tech. broch. 01050

Adjustable thermostatic and pressure balanced mixing valve for point of distribution in domestic water systems and radiant hydronic heating systems. Low-lead brass body. Internal anti-scale materials. Locking set point knob. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 200°F. Adjustable range: 85—150°F. Min. flow for optimum performance: 1.3 gpm. Gauge scale: 30—210°F. Gauge accuracy: ± 6°F. Gauge dial: 2" diameter. Certified to: cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Cv	Lbs	USD
521410A	½" NPT male	3	2.9	<b>305.70</b>
521410AC	½" NPT male inlet check valves	3	2.9	<b>331.10</b>
521510A	¾" NPT male	3	2.9	<b>317.00</b>
521510AC	¾" NPT male inlet check valves	3	2.9	<b>353.90</b>
521610A	1" NPT male	3	2.9	<b>364.50</b>
521610AC	1" NPT male inlet check valves	3	2.9	<b>401.40</b>



## LOW LEAD THERMOSTATIC MIXING VALVES

**NEW**

### 521 MixCal™ Press

tech. broch. 01050



Adjustable thermostatic and pressure balanced mixing valve for point of distribution in domestic water systems and radiant hydronic heating systems. Low-lead brass body. Internal anti-scale materials. Locking set point knob. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 200°F. Adjustable range: 85—150°F. Min. flow for optimum performance: 1.3 gpm. Gauge accuracy: ± 6°F. Gauge dial: 2" diameter. Certified to: cUPC listed to ASSE 1017/ CSA B125.3, Low lead.

Code	Description	Cv	Lbs	USD
<b>521506A</b>	¾" Press	3	2.4	<b>271.40</b>
<b>521516A</b>	¾" Press / w gauge	3	2.9	<b>322.90</b>



Conical inlet filter and check valve for use in 521 and 5213 mixing valves. (Priced each, sold in package of 10)

Code	Description	Lbs	USD
<b>F52429</b>	Conical filter	0.1	<b>5.00</b>
<b>R39204</b>	Check valve insert	0.1	<b>4.20</b>

**NEW**

### 521 MixCal™ Body

tech. broch. 01050



Replacement body. Meets requirements of ANSI/NSF 372-2011. Certified to: cUPC listed to ASSE 1017/ CSA B125.3, Low lead.

Code	Description	Cv	Lbs	USD
<b>521101A</b>	1" male union thread	3	1.9	<b>192.70</b>



Point of distribution mixed temperature gauge adaptor fits MixCal™ 521 series mixing valves. Threaded union mounting replaces existing mixed outlet with ¾" or 1" sweat pipe connection. Removable gauge fits into temperature well. Gauge dial is 2" diameter and scale from 30—210°F. Low-lead brass body.

Code	Description	Lbs	USD
<b>NA10328</b>	½" sweat with gauge	0.4	<b>73.80</b>
<b>NA10056</b>	¾" sweat with gauge	0.4	<b>81.10</b>
<b>NA10058</b>	1" sweat with gauge	0.4	<b>89.00</b>
<b>NA10358</b>	1" union thread with gauge	0.5	<b>90.50</b>
<b>688003A</b>	Replacement gauge	0.2	<b>50.30</b>

## LOW LEAD SCALD PROTECTION THERMOSTATIC MIXING VALVES



### 5213 Sweat Scald Protection Point-of-Use

tech. broch. 01092



Adjustable thermostatic and pressure balanced mixing valve for point of use where the user must be protected from the danger of scalding caused by hot water with locking set point. Complete with check valves on both hot and cold inlets. Low-lead brass body. Max. working pressure: 150 psi. Max. inlet temperature: 185°F. Adjustable range: 85—120°F. Temperature control: ±3°F. Min. flow for optimum performance: 0.5 gpm. Certified to: cUPC listed to ASSE 1070/ CSA B125.3 for single and multiple function applications, Low lead.

Code	Description	Cv	Lbs	USD
<b>521349A</b>	½" sweat	2	2.0	<b>259.20</b>
<b>521359A</b>	¾" sweat	2	2.0	<b>271.00</b>
<b>521369A</b>	1" sweat	2	2.0	<b>323.80</b>



### 5213 NPT Scald Protection Point-of-Use

tech. broch. 01092



Adjustable thermostatic and pressure balanced mixing valve for point of use where the user must be protected from the danger of scalding caused by hot water with locking set point. Complete with check valves on both hot and cold inlets. Low-lead brass body. Max. working pressure: 150 psi. Max. inlet temperature: 185°F. Adjustable range: 85—120°F. Temperature control: ±3°F. Min. flow for optimum performance: 0.5 gpm. Certified to: cUPC listed to ASSE 1070/ CSA B125.3 for single and multiple function applications, Low lead.

Code	Description	Cv	Lbs	USD
<b>521342A</b>	½" NPT male	2	2.0	<b>271.00</b>
<b>521352A</b>	¾" NPT male	2	2.0	<b>282.80</b>
<b>521362A</b>	1" NPT male	2	2.0	<b>335.80</b>

## LOW LEAD HIGH FLOW THERMOSTATIC MIXING VALVES

ASSE 1017 model 5231 series high flow thermostatic mixing valves for centralized systems are designed to be installed at the hot water heater (point of distribution). For safety reasons, it is advisable to limit the maximum mixed water temperature to 120°F. Series 5231 thermostatic mixing valves can also be used for regulating the flow temperature in radiant panel heating systems, to which it assures a constant and accurate control with ease of installation.

**NEW**



### 5231 High Flow Sweat

tech. broch. 01256

Adjustable thermostatic mixing valve for domestic water systems and radiant hydronic systems. DZR low lead brass body with internal anti-scale materials. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 195°F. Adjustable range: 90—150°F. Certified to: \*cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Min. Flow (gpm)	Cv	Lbs	USD
<b>523168A</b>	1" sweat	4.4	7.0	7.0	<b>1,276.00</b>
<b>523168AC</b>	1" sweat w/check	4.4	7.0	9.0	<b>1,434.00</b>
<b>523178A</b>	1¼" sweat	4.4	7.6	7.0	<b>1,495.00</b>
<b>523178AC</b>	1¼" sweat w/check	4.4	7.6	9.0	<b>1,653.00</b>
<b>523188A</b>	1½" sweat	8.8	13.0	17	<b>2,102.00</b>
<b>523188AC</b>	1½" sweat w/check	8.8	13.0	19	<b>2,491.00</b>
<b>523198A</b>	2" sweat	8.8	14.2	18	<b>2,416.00</b>
<b>523198AC</b>	2" sweat w/check	8.8	14.2	20	<b>2,804.00</b>

**NEW**



### 5231 High Flow NPT

tech. broch. 01256

Adjustable thermostatic mixing valve for domestic water systems and radiant hydronic systems. DZR low lead brass body with internal anti-scale materials. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 195°F. Adjustable range: 90—150°F. Certified to: \*cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Min. Flow (gpm)	Cv	Lbs	USD
<b>523160A</b>	1" NPT M	4.4	7.0	7.0	<b>1,372.00</b>
<b>523160AC</b>	1" NPT M w/check	4.4	7.0	9.0	<b>1,529.00</b>
<b>523170A</b>	1¼" NPT M	4.4	7.6	7.0	<b>1,570.00</b>
<b>523170AC</b>	1¼" NPT M w/check	4.4	7.6	9.0	<b>1,727.00</b>
<b>523180A</b>	1½" NPT M	8.8	13.0	17	<b>2,177.00</b>
<b>523180AC</b>	1½" NPT M w/check	8.8	13.0	19	<b>2,565.00</b>
<b>523190A</b>	2" NPT M	8.8	14.2	18	<b>2,492.00</b>
<b>523190AC</b>	2" NPT M w/check	8.8	14.2	20	<b>2,880.00</b>

**NEW**



### 5231 High Flow Sweat

tech. broch. 01256

Adjustable thermostatic mixing valve for domestic water systems and radiant hydronic systems. DZR low lead brass body with internal anti-scale materials. Meets requirements of ANSI/NSF 372-2011. Max. working pressure: 200 psi. Max. inlet temperature: 195°F. Adjustable range: 90—150°F. Gauge scale: 30—210°F. Gauge accuracy: ± 6°F. Gauge dial: 2" diameter. Certified to: \*cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Min. Flow (gpm)	Cv	Lbs	USD
<b>523177A</b>	1¼" sweat	4.4	7.6	9.0	<b>1,583.00</b>
<b>523177AC</b>	1¼" sweat w/check	4.4	7.6	11.0	<b>1,740.00</b>



Point of distribution mixed temperature gauge adaptor fits High Flow 5231 series mixing valves. Threaded union mounting replaces existing mixed outlet with 1¼" sweat pipe connection. Removable gauge fits into temperature well. Gauge dial is 2" diameter and scale from 30—210°F. Low-lead brass body.



Code	Description	Lbs	USD
<b>NA10315</b>	1¼" sweat with gauge	0.5	<b>178.90</b>
<b>688003A</b>	Replacement gauge	0.2	<b>50.30</b>

**NEW**



Inlet check valve assembly for mounting on inlet union tail pieces of 5231 mixing valves. Stainless steel body.

Code	Description	Lbs	USD
<b>NA10366</b>	Check valve assembly 1" and 1¼"	1.0	<b>78.80</b>
<b>NA10367</b>	Check valve assembly 1½" & 2"	1.5	<b>194.30</b>

**NEW**



### 5231 High Flow Body

tech. broch. 01256

Replacement body. Meets requirements of ANSI/NSF 372-2011. Certified to: cUPC listed to ASSE 1017/ CSA B125.3, Low lead.



Code	Description	Min. Flow (gpm)	Cv	Lbs	USD
<b>523179A</b>	1½" union thread	4.4	7.6	5.0	<b>1,266.00</b>
<b>523199A</b>	2½" union thread	8.8	14.2	15.0	<b>1,936.00</b>

\*Includes no fittings or union nuts.

## MIXING VALVE FOR CENTRALIZED SYSTEMS



### NA164 3-way - 24 V AC motorized 3-wire control temperature mixing valve

Motorized mixing valve for hydronic systems or in radiant panel heating systems. Operates on a control signal from a separately-sourced outdoor reset controller. High flow rate. No swings due to sudden changes in thermal load. Installation flexibility with reversible cold inlet port and straight through flow direction from hot inlet to mixed outlet. Brass body.  
Max. working pressure: 200 psi.  
Temperature range: 40—210°F.  
Power supply: 24 V AC.  
Power consumption: 8 W.  
Rating of micro-switch contacts: 5 A (24 V).





### NA163 3-way fixed temperature mixing valve

Adjustable thermostatic mixing valve for boiler protection and low temperature mixing. Installation flexibility with reversible cold inlet port and straight through flow direction from hot inlet to mixed outlet. Brass body.  
Max. working pressure: 200 psi.  
Max. inlet temperature: 185°F.  
Adjustable range: 80—130°F.

Code	Description	Cv	Lbs	USD
<b>NA16469</b>	1" sweat unions, floating	7.7	5.8	<b>1040.00</b>
<b>F19149</b>	Replacement actuator 3-wire floating		1.8	<b>420.00</b>

Code	Description	Cv	Lbs	USD
<b>NA16369</b>	1" sweat unions	3.9	4.8	<b>820.00</b>

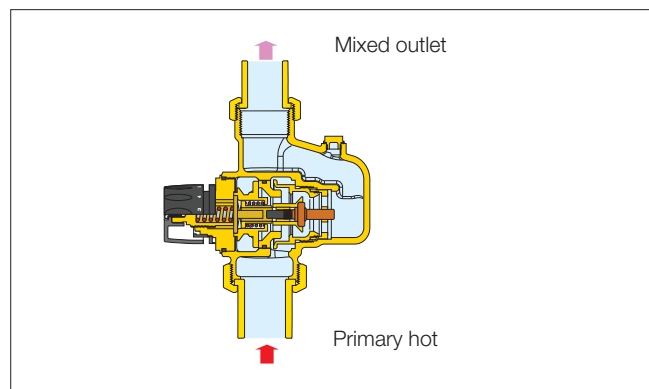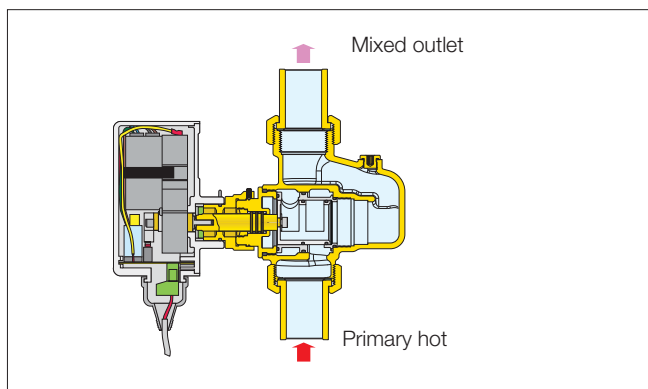

## BOILER PROTECTION VALVES



### 280 ThermoMix™ NPT

tech. broch. 01223

Boiler protection high-flow thermostatic mixing valve.  
Changeable thermostatic sensor cartridge.  
Brass body and lower plug.  
Max. working pressure: 150 psi.  
Working temperature range: 40—212°F.  
Thermostatic sensor cartridge:  
130°F & 140°F Tset standard selections,  
see below  
115°F, 160°F Tset optional (field  
replaceable).  
Sensor cartridge accuracy: ±4°F.  
By-pass from boiler complete closing  
temperature: Tset +18°F (ex. 130°+18°=148°F).

PCT  
INTERNATIONAL  
APPLICATION  
PENDING

Code	Description	Cv	Lbs	USD
280165A	1" NPT 130°F Tset	10	3.6	422.00
280166A	1" NPT 140°F Tset	10	3.6	422.00
280175A	1½" NPT 130°F Tset	14	4.5	485.00
280176A	1½" NPT 140°F Tset	14	4.5	485.00



### 280 ThermoMix™ Sweat

tech. broch. 01223

Boiler protection high-flow thermostatic mixing valve.  
Changeable thermostatic sensor cartridge.  
Brass body and lower plug.  
Max. working pressure: 150 psi.  
Working temperature range: 40—212°F.  
Thermostatic sensor cartridge:  
130°F & 140°F Tset standard selections,  
see below  
115°F, 160°F Tset optional (field  
replaceable).  
Sensor cartridge accuracy: ±4°F.  
By-pass from boiler complete closing  
temperature: Tset +18°F (ex. 130°+18°=148°F).

PCT  
INTERNATIONAL  
APPLICATION  
PENDING

Code	Description	Cv	Lbs	USD
280965A	1" sweat 130°F Tset	10	3.6	395.00
280966A	1" sweat 140°F Tset	10	3.6	395.00
280975A	1½" sweat 130°F Tset	14	4.5	465.00
280976A	1½" sweat 140°F Tset	14	4.5	465.00

#### FUNCTION

The ThermoMix™ boiler protection high-flow thermostatic mixing valve is used in hydronic heating systems with non-condensing boilers, including solid fuel, biomass, gas, LP or oil-fired. It can be installed with steel, cast iron and copper tube style boilers, automatically controlling the return water temperature, preventing condensation of the water vapor contained in the flue gas.

The 280 series ThermoMix™ valve mixes by-pass flow from the boiler with return flow from the system, sending a fixed temperature flow to the boiler which protects against corrosion from condensation occurring when a minimum flue gas temperature is not otherwise maintained.


Changeable thermostatic sensor cartridges modifies valve temperature setting. The thermostatic sensor cartridges can easily be removed for maintenance or to change the valve set temperature, with out removing the valve body from the piping.

#### Thermostatic sensor replacement to modify setting


The thermostatic sensor can easily be removed for maintenance or to change the setting, with no need to remove the valve body from the piping.

#### Installation


The valve can be installed on both sides of the boiler in any position, vertical or horizontal. Installation is recommended on the return to the boiler in mixing mode; it can also be installed on the flow from the boiler in diverter mode.




#### Characteristic components

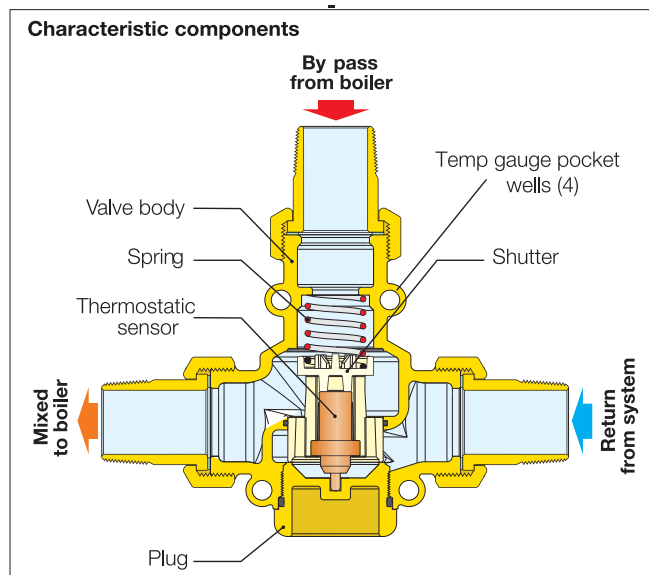

#### Installation in mixing mode (boiler protection)

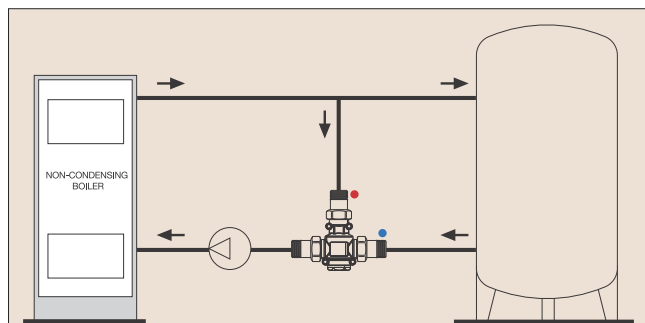

#### Installation in diverter mode (system control)

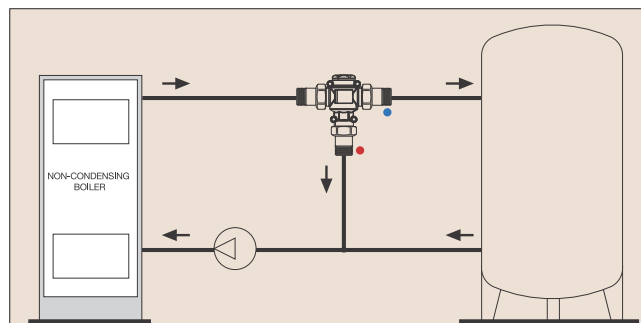

## BOILER PROTECTION VALVES

### F296



Replacement thermostatic sensor cartridges.  
Sensor cartridge accuracy:  $\pm 4^{\circ}\text{F}$ .  
By-pass from boiler complete closing temperature:  $T_{\text{set}} + 18^{\circ}\text{F}$  ( $130^{\circ} + 18^{\circ} = 148^{\circ}\text{F}$ ).

Fits 280 and 281 series boiler protection valves.  
Easy replacement to change the 280 valve set temperature without removing the valve body from the piping.

Code	Description	Lbs	USD
<b>F29633</b>	115°F Tset	0.2	<b>40.00</b>
<b>F29634</b>	130°F Tset	0.2	<b>40.00</b>
<b>F29635</b>	140°F Tset	0.2	<b>40.00</b>
<b>F29636</b>	160°F Tset	0.2	<b>40.00</b>

Selection note: thermostatic sensor cartridge will completely close at Tset value  $+18^{\circ}\text{F}$ . Example: ( $130^{\circ}\text{F}$  Tset  $+18^{\circ}\text{F} = 148^{\circ}\text{F}$  completely closed)  $\pm 4^{\circ}\text{F}$ .

### F295



Dual scale temperature gauge fits ThermoMix™ 280 & 281 series boiler protection valves.

Code	Description	Lbs	USD
<b>F29571</b>	32 — 250°F	0.2	<b>34.00</b>

## REPLACEMENT CARTRIDGE FOR 5230 VALVE






Replacement cartridge for 5230 series thermostatic mixing valves.

Code	Fits 5230...	Ov.	Lbs	USD
<b>523005</b>	58A,66A	4.8	1.9	<b>685.00</b>
<b>523006</b>	60A,68A,70A,78A	8 — 10	2.5	<b>966.00</b>
<b>523008</b>	80A,90A	17 — 22	4.6	<b>1,657.00</b>

### Replacing the cartridge

The internal cartridge, containing all the regulating components, can be inspected and, if necessary, replaced, without the need to remove the valve body from the pipe.

- 1) Close the shut-off valves on the hot and cold inlets. Set the knob to the maximum value.
- 2) Remove the temperature regulating knob after unscrewing the lock screw at the top. Dismantle the plastic knob frame. Unscrew the brass plated protective cover by means of the hexagon ( $1'' - 1 \frac{1}{4}''$ ).
- 3) Remove the internal cartridge for inspection or replacement, using a suitably sized spanner.
- 4) Refit the protective brass plated cover. Refit the plastic frame in such a way that the position indicator is visible.
- 5) The spare cartridge is supplied pre-set to the maximum value. Position the regulating knob in such a way that the letters MAX align with the position indicator. By rotating the knob clockwise, it should be possible to adjust the value from maximum to minimum. Fix the knob with the top lock screw.
- 6) Reopen the shut-off valves and adjust the thermostatic mixing valve to the required temperature value.








## AUTOMATIC FILLING UNITS AND BACKFLOW PREVENTERS

This diagram is an example

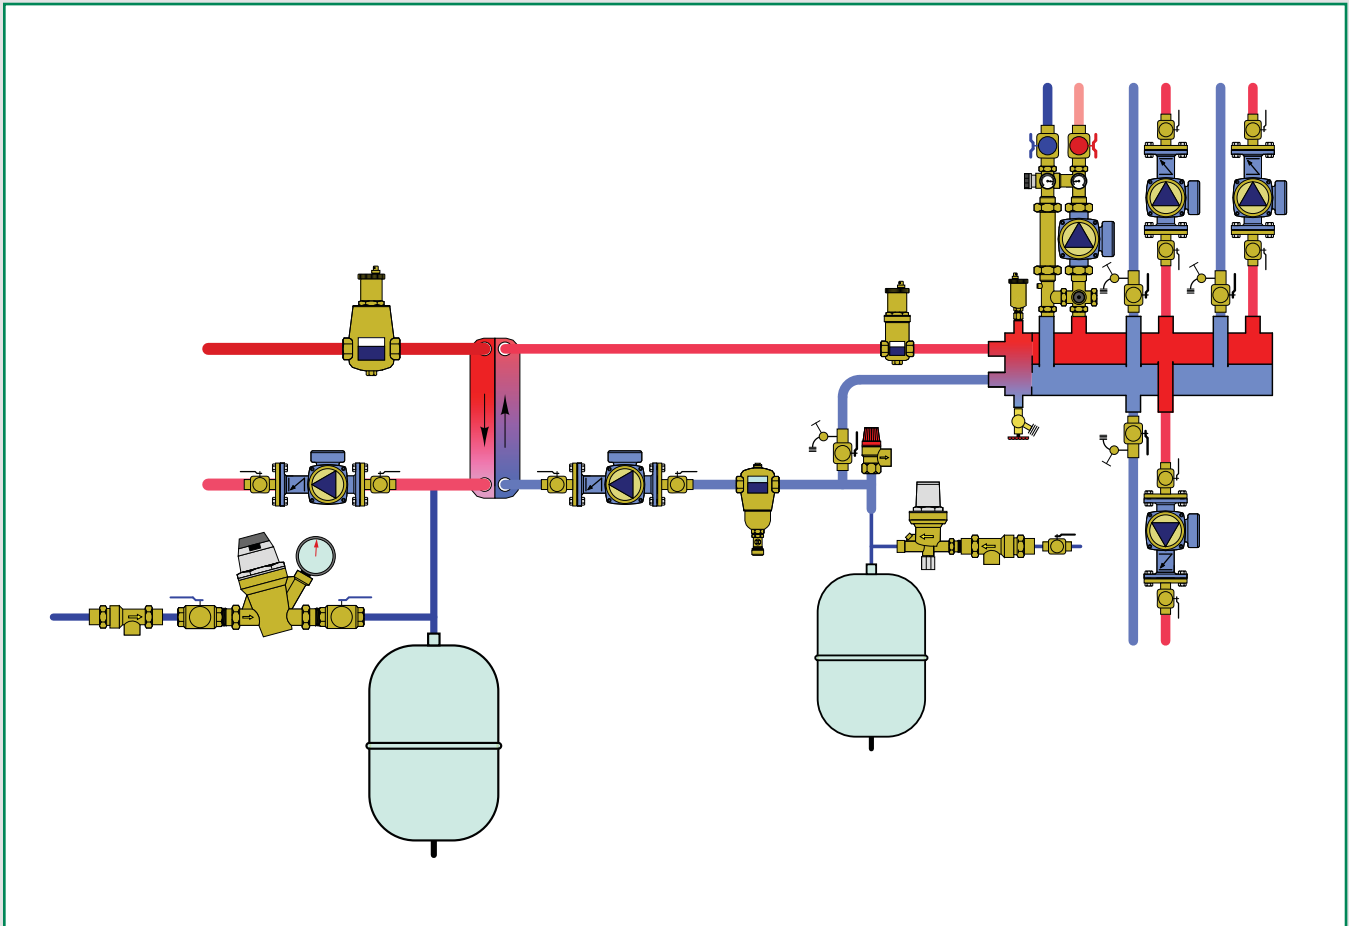

Automatic filling units, AutoFill™

Backflow preventers


Boiler trim kits

## AUTOMATIC FILLING UNITS

### Function

The AutoFill™ Combo is a pre-assembled unit consisting of an AutoFill™ and backflow preventer.

The AutoFill™ automatic filling valve is a pressure reducing valve with a compensating seat, an inlet filter, a shut-off valve and a check valve. It is installed on the water inlet piping in sealed heating systems, and its main function is to maintain the pressure of the system to a preset value, automatically filling up with water as required. This valve has been designed as pre-adjustable, which means it can be adjusted at the required pressure value before charging the system. After installation, during the filling or topping-off phase, the water feed will stop automatically when the set pressure is reached filling 50% faster than other valves. There are no levers to flip or valve to close. Pre-assembled with the backflow preventer, it features an atmospheric vent which is designed to protect drinking water systems from return flow, caused by back-siphoning or back pressure, of contaminated fluids. The 573 series has been specifically certified to standards CSA B64.3 and ASSE 1012.

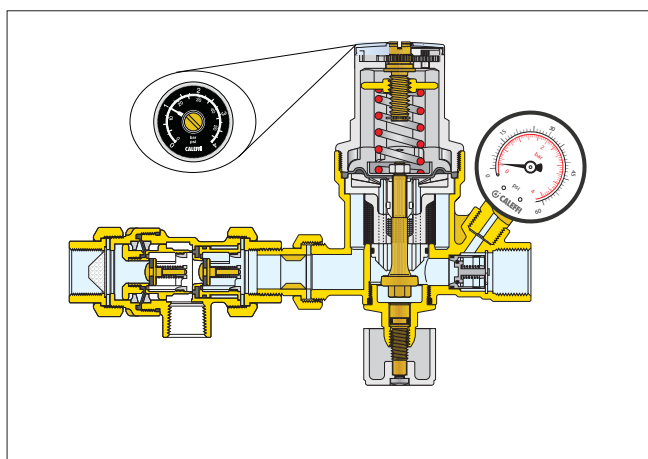

## BACKFLOW PREVENTERS

### 573

tech. broch. 01061



Dual check continuous pressure backflow preventer with atmospheric vent.  
Brass body.  
Max. working pressure: 175 psi.  
Working temperature range: 32—210°F.  
Emergency backpressure temperature: 250°F  
ASSE 1012 listed and CSA B64.3 certified.



Code	Description	Lbs	USD
573403A	½" NPT female inlet/outlet	1.7	121.30
573409A	½" sweat inlet/outlet	1.7	115.60
573493A	½" sweat inlet x ½" F NPT outlet	1.7	118.60
573503A	¾" NPT female inlet/outlet	1.7	127.40

NEW



### 553 AutoFill™

tech. broch. 01061

Pre-adjustable automatic filling valve, anti-scale, visual system pressure indicator. Complete with manual shut-off valve, strainer and check valve.

Brass body.

Max. inlet pressure: 230 psi.

Max. working temperature: 150°F.

Setting pressure range: 3—60 psi.

Preset outlet pressure: 15 psi.

Pressure gauge scale: 0—60 psi / 0-4 bar.

Code	Description	Lbs	USD
553542A	½" M NPT inlet x ½" F NPT outlet	1.7	155.50
553549A	½" sweat inlet x ½" F NPT outlet	1.7	148.20
553642A	½" M NPT inlet x ½" F NPT outlet / gauge	1.7	175.50
553649A	½" sweat inlet x ½" F NPT outlet / gauge	1.7	168.20

NEW



### 573 AutoFill™ Combo

tech. broch. 01061

Pre-adjustable automatic filling valve with backflow preventer.

Brass body.

Max. inlet pressure: 175 psi.

Max. working temperature: 150°F.

Setting pressure range: 3—60 psi.

Preset outlet pressure: 15 psi.

Pressure gauge scale: 0—60 psi / 0-4 bar.

Code	Description	Lbs	USD
573002A	½" F NPT inlet x ½" F NPT outlet	5.0	266.90
573009A	½" sweat inlet x ½" F NPT outlet	5.0	254.20
573012A	½" F NPT inlet x ½" F NPT outlet / gauge	5.0	286.90
573019A	½" sweat inlet x ½" F NPT outlet / gauge	5.0	274.20

NEW



Code	Description	Lbs	USD
NA10363	Replacement gauge 60 psi/0-4 bar, ¼" NPT	0.1	20.00



Code	Description	Lbs	USD
F59650	AutoFill™ 553 series replacement cartridge	0.2	45.90



Code	Description	Lbs	USD
NA10197	AutoFill™ clear plastic disc cover	0.1	2.10


## COMMERCIAL AUTOMATIC FILLING UNITS



### 5350 AutoFill™

tech. broch. 01085

Automatic filling valve.  
Brass body.  
Complete with integral downstream pressure gauge and pressure setting adjustment knob.  
Max. working pressure: 365 psi.  
Max. working temperature: 140°F.  
Pressure gauge scale: 0—100 psi /0-7 bar.  
Pressure setting range: 6—90 psi.  
Preset outlet pressure: 15 psi.

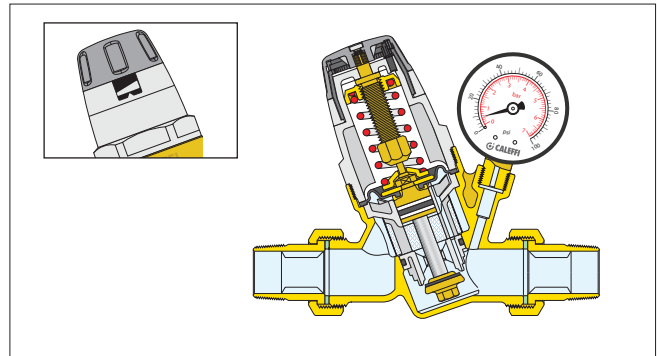


#### System pressure setting

AutoFill™ automatic filling valves in the 5350 series are fitted with an operating adjustment knob and an integral downstream outlet pressure gauge. This adjustment knob features continuous rotational operation, the pressure can be adjusted continuously, resulting in 7 psi per revolution, with the value displayed on the outlet gauge.

#### Removable self-contained cartridge

The cartridge, containing the diaphragm, strainer, seat, valve port and compensating piston, is preassembled as a "self-contained unit" with a cover and can be easily removed for inspection and maintenance procedures.

Code	Description	Lbs	USD
535051A	¾" NPT male union	2.3	<b>245.90</b>
535056A	¾" press	2.3	<b>255.80</b>
535059A	¾" sweat union	2.3	<b>243.60</b>



#### High flow fast filling feature

AutoFill™ automatic filling valve 5350 series has large internal fluid passages allowing high flow filling with minimum pressure drop through the valve body. The table below shows flow rates with the corresponding pressure drop at different flow velocities.

Velocity ( f/s )	4	6	8	10
Flow ( gpm )	8	14	20	24
Pressure drop ( psi )	8	13	17	21



### NA102

Pressure gauge fits 5350 series AutoFill™.  
Dial size: 2".  
Pressure range: 0—100 psi /0-7 bar.  
Connection: 1/8" NPT.

Code	Description	Lbs	USD
NA10273	1/8" NPT	0.1	<b>16.20</b>



Replacement cartridge for 5350 series AutoFill™.

Code	Description	Lbs	USD
535004	AutoFill™ 5350 series replacement cartridge	0.1	<b>73.50</b>

## BOILER TRIM KITS

NEW



### NA553

Boiler Trim Kits.  
Boiler installation components in one box.  
This kit includes:

- 1 Air purger
- 1 MiniCal® air vent with service check
- 1 Backflow preventer
- 1 AutoFill™
- 1 Expansion tank check valve
- 2 Brass nipples
- 1 Brass tee
- 1 Expansion tank

Code	NA553362P	NA553372P
Air purger	443-1 1" NPT F	444-1 1¼" NPT F
AutoFill™/Backflow preventer combination	573009A ½" sweat	573009A ½" sweat
MiniCal® Air vent w/ check	502115A	502115A
Check valve	561402A	561402A
Tank	4.4 gal	4.4 gal
Nipples	3" Brass	3" Brass
Tee	NPT Brass	NPT Brass
Weight (lbs)	15	16
USD	<b>\$ 472.50</b>	<b>\$ 472.50</b>

## BOILER TRIM KITS



### NA553

Boiler Trim Kits.

10 configurations combining 8 boiler installation components in one box.

This kit includes:

- 1 Caleffi DISCAL® Air Separator
- 1 Backflow Preventer
- 1 AutoFill™
- 1 Expansion Tank Check Valve
- 2 Brass Nipples
- 1 Brass Tee
- 1 Expansion Tank

**NA553-B kits do not include backflow preventer**

### NPT Connections

Code	NA553252	NA553362	NA553662	NA553372	NA553672
DISCAL®	551003A ¾" NPT	551006A 1" NPT	551006A 1" NPT	551007A 1¼" NPT	551007A 1¼" NPT
AutoFill™/Backflow Preventer Combination	573002A ½" NPT	573002A ½" NPT	573002A ½" NPT	573002A ½" NPT	573002A ½" NPT
Check Valve	561402A	561402A	561402A	561402A	561402A
Tank	2.2 gal	4.4 gal	7.6 gal	4.4 gal	7.6 gal
Nipples	3" Brass	3" Brass	3" Brass	3" Brass	3" Brass
Tee	NPT Brass	NPT Brass	NPT Brass	NPT Brass	NPT Brass
Weight (lbs)	13	15	20	16	21
USD	<b>\$ 591.00</b>	<b>\$ 723.00</b>	<b>\$ 840.00</b>	<b>\$ 837.00</b>	<b>\$ 955.00</b>


### Sweat Connections

Code	NA553259	NA553369	NA553669	NA553379	NA553679
DISCAL®	551022A ¾" sweat	551028A 1" sweat	551028A 1" sweat	551035A 1¼" sweat	551035A 1¼" sweat
AutoFill™/Backflow Preventer Combination	573009A ½" sweat	573009A ½" sweat	573009A ½" sweat	573009A ½" sweat	573009A ½" sweat
Check Valve	561402A	561402A	561402A	561402A	561402A
Tank	2.2 gal	4.4 gal	7.6 gal	4.4 gal	7.6 gal
Nipples	3" Brass	3" Brass	3" Brass	3" Brass	3" Brass
Tee	NPT Brass	NPT Brass	NPT Brass	NPT Brass	NPT Brass
Weight (lbs)	13	15	20	16	21
USD	<b>\$ 580.00</b>	<b>\$ 709.00</b>	<b>\$ 823.00</b>	<b>\$ 821.00</b>	<b>\$ 937.00</b>

### Sweat Connections

Code	NA553259-B	NA553369-B	NA553669-B	NA553379-B	NA553679-B
DISCAL®	551022A ¾" sweat	551028A 1" sweat	551028A 1" sweat	551035A 1¼" sweat	551035A 1¼" sweat
AutoFill™	553549A ½" sweat	553549A ½" sweat	553549A ½" sweat	553549A ½" sweat	553549A ½" sweat
Check Valve	561402A	561402A	561402A	561402A	561402A
Tank	2.2 gal	4.4 gal	7.6 gal	4.4 gal	7.6 gal
Nipples	3" Brass	3" Brass	3" Brass	3" Brass	3" Brass
Tee	NPT Brass	NPT Brass	NPT Brass	NPT Brass	NPT Brass
Weight (lbs)	12	13	18	15	20
USD	<b>\$ 447.70</b>	<b>\$ 575.00</b>	<b>\$ 691.00</b>	<b>\$ 689.00</b>	<b>\$ 803.00</b>

This diagram is an example

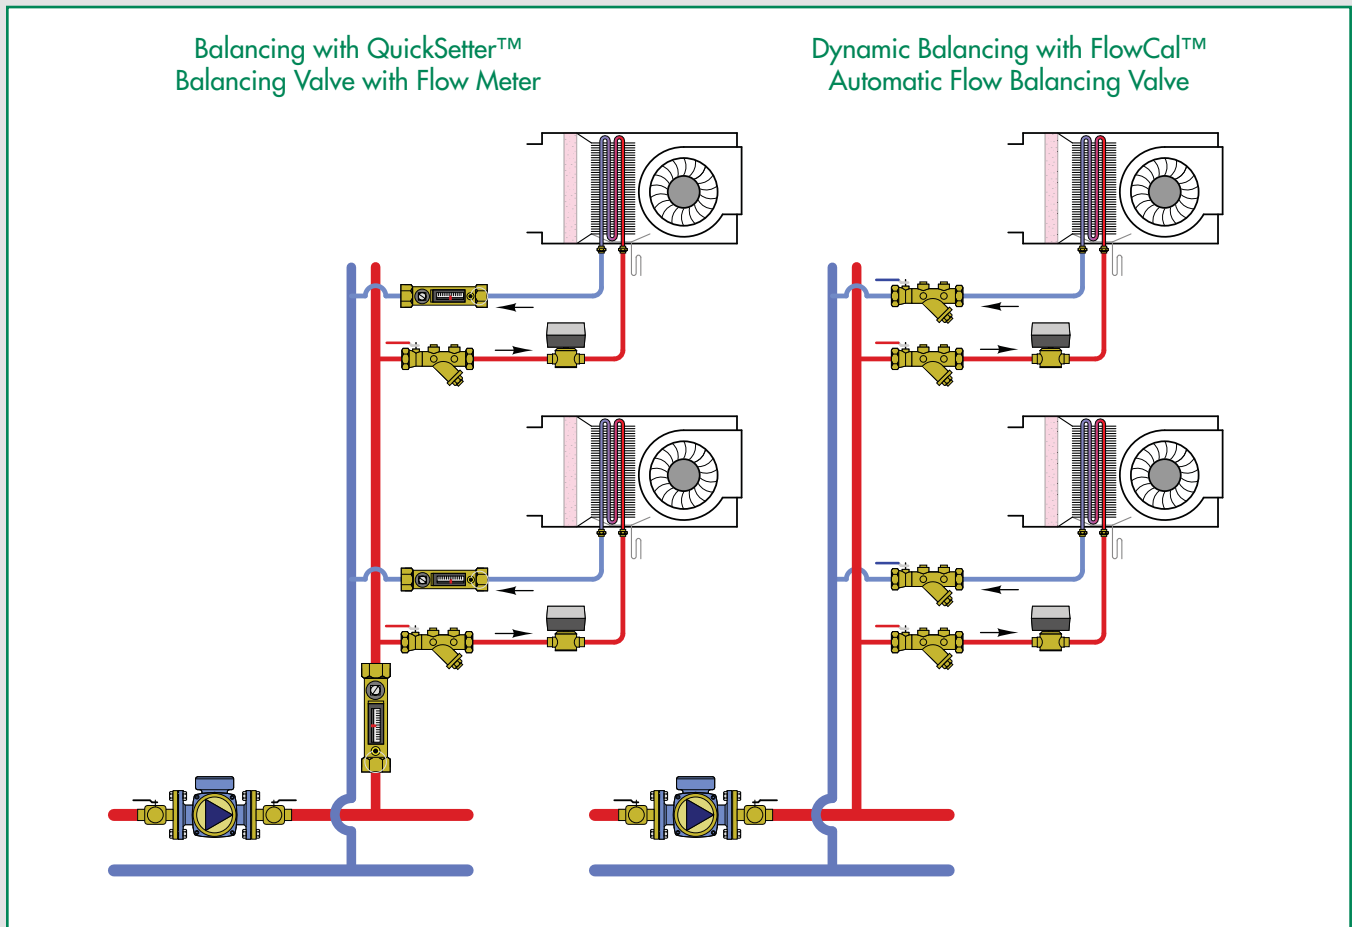

Low lead compact dynamic balancing valve, FlowCal™

Dynamic balancing valve, FlowCal™

Y-Strainer

Static balancing valve with flow meter, QuickSetter™ and Low lead QuickSetter+™


Low lead fixed orifice static balancing valves

Low lead variable orifice static balancing valves

## DYNAMIC BALANCING – FlowCal™ DEVICES

### Circuits balanced with FlowCal™

FlowCal™ balances the hydraulic circuit by automatically controlling the design flow rate to each emitter. Even with some circuits closed by the control valves, the flow rates in the open circuits remain constant at the nominal value. The system always provides the greatest comfort and the highest energy savings.

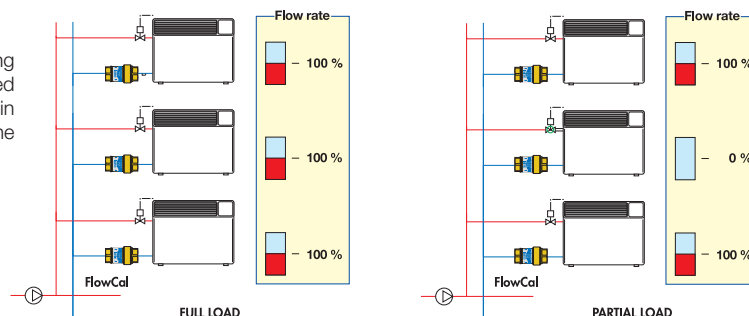


## LOW LEAD COMPACT DYNAMIC BALANCING VALVE



### 127 FlowCal™

tech. broch. 01166

Compact automatic flow balancing valve.  
DZR low-lead brass body.  
Patented anti-scale, low noise polymer FlowCal™ cartridge.  
Max. working pressure: 232 psi (16 bar).  
Temperature range: 32–212°F (0–100°C).  
Max. percentage of glycol: 50%  
Differential pressure control ranges: 2–14, 2–32, 4–34, 5–35 psid.  
Flow rate: 16 fixed flow rate settings ranging from 0.5–10 GPM.  
Flow accuracy: ±10%.  
Certified Low lead.  
US Patent 7,246,635 B2.

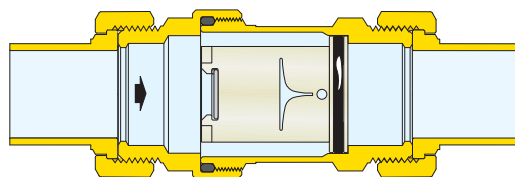

Code	Description	Lbs	USD
127341AF ...	½" NPT male	1.0	133.80
127349AF ...	½" sweat	0.8	127.40
127351AF ...	¾" NPT male	1.0	139.90
127356AF ...	¾" Press	0.8	138.80
127359AF ...	¾" sweat	0.8	133.10
127361AF ...	1" NPT male	1.2	160.40
127369AF ...	1" sweat	1.0	152.80

Select desired flow rate to complete full part number.

No restrictions.


GPM	Last 3 digits ...	Differential Pressure Control Ranges (psid)
½	G50	2–14
¾	G75	
1	1G0	2–32
1½	1G5	
2	2G0	
2½	2G5	
3	3G0	
3½	3G5	

GPM	Last 3 digits ...	Differential Pressure Control Ranges (psid)
4	4G0	2–32
4½	4G5	
5	5G0	
6	6G0	4–34
7	7G0	
8	8G0	
9	9G0	5–35
10	10G	

Replacement flow cartridge kits are available. Consult factory.



## DYNAMIC BALANCING VALVE

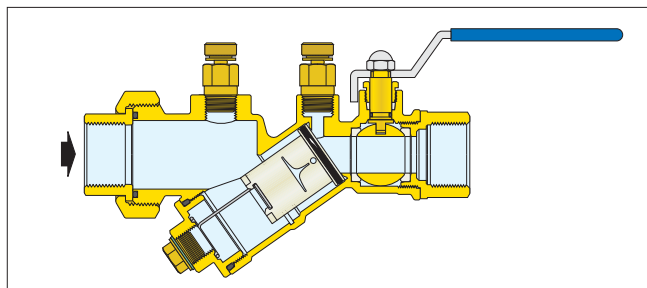

### 121 FlowCal™

tech. broch. 01141

Automatic flow balancing valve with integral ball valve.  
Brass body.  
Patented anti-scale, low noise polymer FlowCal™ cartridge.  
Maximum working pressure: 400 psi (400 WOG).  
Working temperature range: 32–212°F (0–100°C).  
Max. percentage of glycol: 50%.  
Differential pressure control ranges: 2–14, 2–32, 4–34, 5–35 psid.  
Flow rate: 27 fixed flow rate settings ranging from 0.5–21 GPM.  
Flow accuracy: ±10%.  
US Patent 7,246,635 B2.

Available with optional factory-installed pressure and temperature test ports (1213xxx series).

Code	Description	Lbs	USD
<b>121141A ...</b>	½" NPT female	2.7	<b>185.20</b>
<b>121149A ...</b>	½" sweat	2.7	<b>176.40</b>
<b>121151A ...</b>	¾" NPT female	2.7	<b>187.40</b>
<b>121159A ...</b>	¾" sweat	2.7	<b>178.50</b>
<b>121161A ...</b>	1" NPT female	5.0	<b>382.00</b>
<b>121169A ...</b>	1" sweat	5.0	<b>363.80</b>
<b>121171A ...</b>	1¼" NPT female	5.0	<b>428.40</b>
<b>121179A ...</b>	1¼" sweat	5.0	<b>407.90</b>
<b>121341A ...</b>	½" NPT female with PT test ports	3.2	<b>198.50</b>
<b>121349A ...</b>	½" sweat with PT test ports	3.2	<b>189.60</b>
<b>121351A ...</b>	¾" NPT female with PT test ports	3.2	<b>201.30</b>
<b>121359A ...</b>	¾" sweat with PT test ports	3.2	<b>191.70</b>
<b>121361A ...</b>	1" NPT female with PT test ports	5.5	<b>395.90</b>
<b>121369A ...</b>	1" sweat with PT test ports	5.5	<b>377.10</b>
<b>121371A ...</b>	1¼" NPT female with PT test ports	5.5	<b>442.30</b>
<b>121379A ...</b>	1¼" sweat with PT test ports	5.5	<b>421.20</b>

Select desired flow rate to complete full part number.

GPM	Last 3 digits ...	Differential Pressure Control Ranges (psid)
½	G50	2–14
¾	G75	
1	1G0	
1½	1G5	2–32
2	2G0	
2½	2G5	
3	3G0	
3½	3G5	
4	4G0	
4½	4G5	4–34
5	5G0	
6	6G0	
7	7G0	
8	8G0	

GPM	Last 3 digits ...	Differential Pressure Control Ranges (psid)
9	9G0	5–35
10	10G	
11	11G	
12	12G	3–32
13	13G	
14	14G	
15	15G	4–35
16	16G	
17	17G	
18	18G	
19	19G	
20	20G	
21	21G	

Size	Flow Rates
½"	½–10 GPM
¾"	½–10 GPM
1"	2½–21 GPM
1¼"	4–21 GPM

Replacement flow cartridge kits are available. Consult factory.

## LOW LEAD FIXED ORIFICE STATIC BALANCING VALVES

### 130 Fixed Orifice Balancing Valve

tech. broch. 01251



Fixed orifice.  
Multi-turn adjustment range.  
Memory stop feature.  
Max. working pressure: 232 psi  
Working temperature range: -4 to 230°F  
Number of adjustment turns: 5  
DZR Low-lead brass body.  
Stainless steel valve plug.  
Teflon® stem guide bearing.  
Certified low lead.

Code	Description	Max. valve Cv	Lbs	USD
<b>130400A</b>	½" NPT	3.7	1.0	<b>185.00</b>
<b>130500A</b>	¾" NPT	5.1	1.2	<b>200.00</b>
<b>130600A</b>	1" NPT	8.8	1.5	<b>240.00</b>
<b>130700A</b>	1¼" NPT	14.0	2.0	<b>300.00</b>
<b>130800A</b>	1 ½" NPT	19.7	2.3	<b>375.00</b>
<b>130900A</b>	2" NPT	30.5	2.5	<b>500.00</b>




Insulation shell fits 130 series balancing valves.

Code	Description	Lbs	USD
<b>CBN130400A</b>	fits ½" NPT	0.1	<b>40.70</b>
<b>CBN130500A</b>	fits ¾" NPT	0.1	<b>44.00</b>
<b>CBN130600A</b>	fits 1" NPT	0.1	<b>52.80</b>
<b>CBN130700A</b>	fits 1¼" NPT	0.1	<b>66.00</b>
<b>CBN130800A</b>	fits 1 ½" NPT	0.1	<b>82.50</b>
<b>CBN130900A</b>	fits 2" NPT	0.1	<b>110.00</b>


#### Operating principle

A balancing valve is a hydraulic device that regulates the flow rate of the fluid passing through it. The flow rate is regulated by means of a knob that controls the movement of a plug that allows the passage of the fluid. The flow rate is determined according to the  $\Delta p$  value measured by two pressure connectors located on the valve.

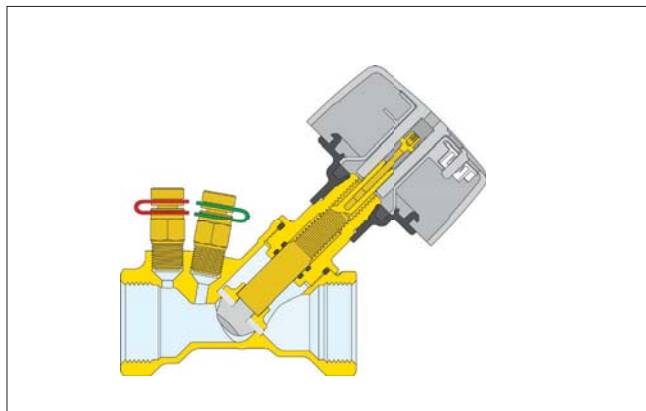

#### Venturi flow rate measurement device

The 130 series valves are equipped with a flow rate measurement device based on the Venturi effect. The device is incorporated in the body of the valve upstream of the valve plug.

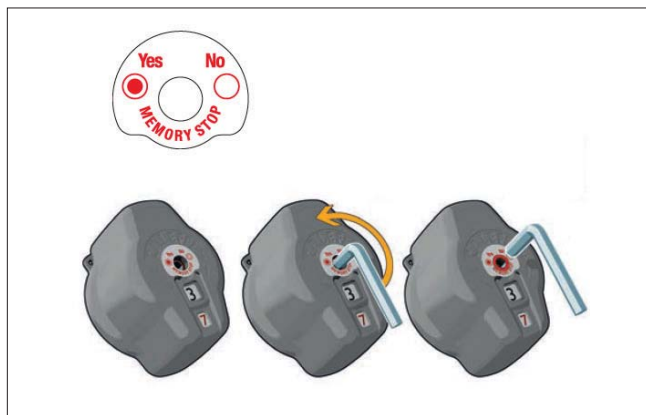


#### Memory Stop

The 130 series balancing valve features a memory stop that allows the valve to be reopened to the initial position if it has been closed for any reason such as isolating components in the balanced circuit. Locking the position to be memorized requires the use of a 2.5 mm hex key.

## Y-STRAINER WITH BALL VALVE

tech. broch. 01141

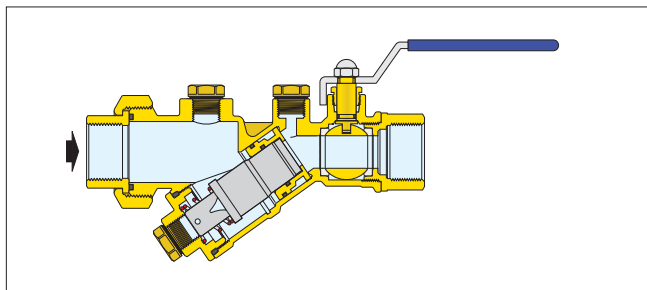

### 120 Y-strainer

Y-strainer with integral ball valve.

Brass body.

Stainless steel filter cartridge.

Maximum working pressure: 400 psi (400 WOG).

Working temperature range: 32–212°F (0–100°C).

Max. percentage glycol: 50%.

Strainer (20 mesh).

Connections:—body: ½", ¾", 1", 1¼" F NPT union x F NPT.

½", ¾", 1", 1¼" sweat union x sweat.

Pressure and temperature ports: ¼" NPT.

Drain port connection: ¼" for ½" & ¾" body.

½" for 1" & 1¼" body.

Code	Description	Cv	Lbs	USD
<b>120141A 000</b>	½" NPT female	8.0	3.0	<b>167.90</b>
<b>120149A 000</b>	½" sweat	8.0	3.0	<b>159.90</b>
<b>120151A 000</b>	¾" NPT female	8.4	3.0	<b>170.10</b>
<b>120159A 000</b>	¾" sweat	8.4	3.0	<b>162.00</b>
<b>120161A 000</b>	1" NPT female	19	6.0	<b>335.80</b>
<b>120169A 000</b>	1" sweat	19	6.0	<b>319.70</b>
<b>120171A 000</b>	1¼" NPT female	20	6.0	<b>382.00</b>
<b>120179A 000</b>	1¼" sweat	20	6.0	<b>363.80</b>
<b>120341A 000</b>	½" NPT female with PT	8.0	3.5	<b>181.80</b>
<b>120349A 000</b>	½" sweat with PT	8.0	3.5	<b>173.10</b>
<b>120351A 000</b>	¾" NPT female with PT	8.4	3.5	<b>184.00</b>
<b>120359A 000</b>	¾" sweat with PT	8.4	3.5	<b>175.20</b>
<b>120361A 000</b>	1" NPT female with PT	19	6.5	<b>349.70</b>
<b>120369A 000</b>	1" sweat with PT	19	6.5	<b>333.00</b>
<b>120371A 000</b>	1¼" NPT female with PT	20	6.5	<b>396.00</b>
<b>120379A 000</b>	1¼" sweat with PT	20	6.5	<b>377.10</b>



### 538

Drain valves for field installation in blow-down-port connection of the 120 series Y-strainer.

Brass body.

With ¾" garden hose connection.

Max. working pressure: 150 psi.

Max. working temperature: 250°F.



### NA1023 PT test ports

Fast-plug pressure/temperature test ports fits FlowCal™ automatic flow balancing valves and the 120 series Y-strainer. The double-sealing core insures long and trouble free service.

Brass body.

Nordel Core.

Connections: ¼" NPT male.

Cap thread: ⅜"-24 UNF

Working temperature range: 0–275°F.

Max. working pressure: 1000 psi.

Code	Description	Lbs	USD
<b>538202 FD</b>	¼" NPT fits ½–¾" 120 series	0.3	<b>19.00</b>
<b>538402 FD</b>	½" NPT fits 1–1¼" 120 series	0.3	<b>19.40</b>

Code	Description	Lbs	USD
<b>NA10233</b>	Standard size, 1½" length	0.5	<b>10.50</b>
<b>NA10235</b>	Extended size, 2¼" length	0.5	<b>21.00</b>

## STATIC BALANCING VALVE WITH FLOW METER



### 132 QuickSetter™

tech. broch. 01149

Balancing valve with flow meter.  
Direct reading of flow rate.  
No sight gauge clouding or scaling.  
Brass valve body and flow meter.  
Rotatable valve for flow rate adjustment.  
Graduated scale flow meter with magnetic movement flow rate indicator.

#### With insulation.

Max. working pressure: 150 psi.  
Temperature range: 14–230°F.  
Max. percentage of glycol: 50%.




Code	Description	Flow scale (gpm)	Lbs	USD
132432A	½" NPT	0.5–1.75	2.0	253.10
132552A	¾" NPT	2.0–7.0	1.8	272.60
132662A	1" NPT	3.0–10.0	2.4	317.90
132772A	1¼" NPT	5.0–19.0	2.8	421.70
132882A	1½" NPT	8.0–32.0	3.4	499.60
132992A	2" NPT	12.0–50.0	4.4	613.00
F19346	Replacement by-pass valve stem*		0.1	51.20

\* With operating ring.

#### Construction details



In the QuickSetter™ series the flow rate (gpm) is displayed directly by a flow meter housed in a by-pass circuit on the valve body, which automatically is shut-off during normal operation.

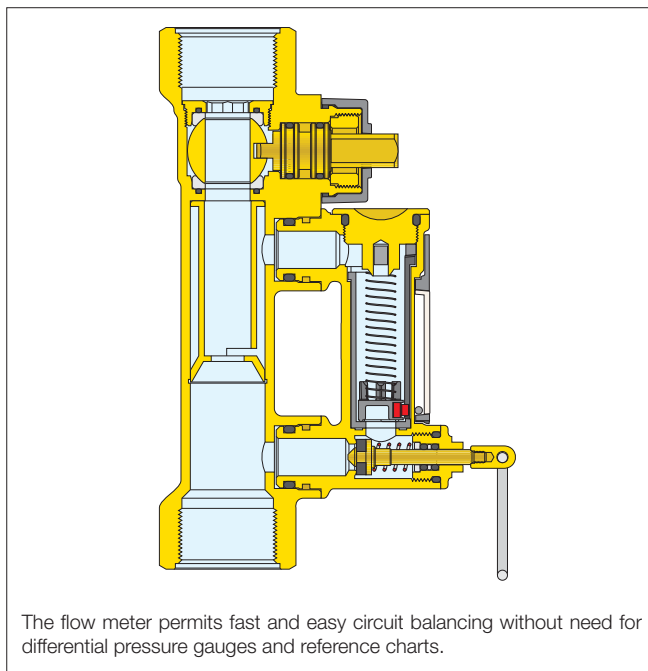



#### Flow rate adjustment

The flow rate is adjusted as follows:

- With the aid of the flow rate indicator (1), mark the desired flow rate.
- Use the operating ring (2) to open the by-pass valve slowly. This allows fluid to flow through the flow meter (3). The bypass valve is automatically closed under normal operating conditions.

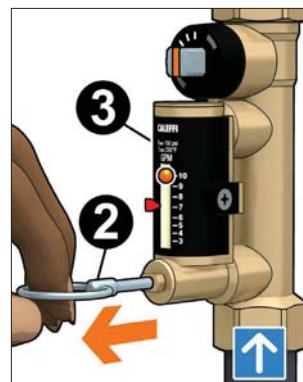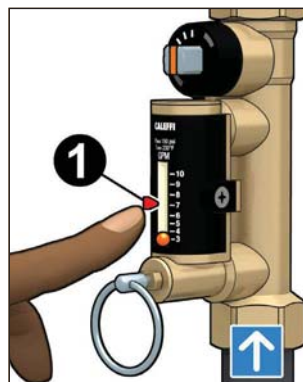

- While holding the bypass valve open, use a wrench to turn the valve control stem (4) to adjust the flow rate slowly. The resulting flow rate is indicated by the metal ball (5) that slides up and down inside a transparent channel (6) marked by a graduated scale in gpm.

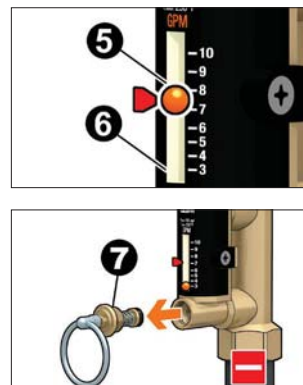
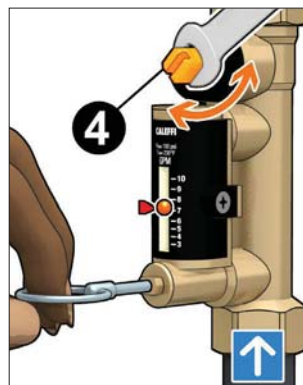


- Once the flow rate is properly adjusted, release the operating ring (2) of the by-pass valve. The valve will automatically return to the closed position by means of an internal spring.
- A replacement by-pass valve stem (7) with operating ring is available in event it is damaged and inoperable. Order code F19346.

#### Complete opening and closing of the valve

Full opening of the valve

Full closing of the valve



## STATIC LOW-LEAD BALANCING VALVE WITH FLOW METER



132

### QuickSetter+™

tech. broch. 01283

Balancing valve with flow meter.  
Direct reading of flow rate.  
No sight gauge clouding or scaling.  
DZR low-lead brass.  
Rotatable stainless steel flow rate adjuster.  
Inlet flow check valve.  
Graduated scale flow meter with magnetic movement flow rate indicator.  
Certified low lead.



Code	Description	Flow scale (gpm)	Lbs	USD
132439AFC	1/2" Sweat	0.5—1.75	2.0	302.00
132539AFC	3/4" Sweat	0.5—1.75	1.8	325.00
132639AFC	1" Sweat	0.5—1.75	2.4	375.00
132459AFC	1/2" Sweat	2.0—7.0	2.0	302.00
132559AFC	3/4" Sweat	2.0—7.0	1.8	325.00
132659AFC	1" Sweat	2.0—7.0	2.4	375.00

#### With temperature gauge:

Code	Description	Flow scale (gpm)	Lbs	USD
132438AFC	1/2" Sweat	0.5—1.75	2.4	355.00
132538AFC	3/4" Sweat	0.5—1.75	2.2	378.00
132638AFC	1" Sweat	0.5—1.75	2.8	427.00
132458AFC	1/2" Sweat	2.0—7.0	2.4	355.00
132558AFC	3/4" Sweat	2.0—7.0	2.2	378.00
132658AFC	1" Sweat	2.0—7.0	2.8	427.00
F19346	Replacement by-pass valve stem*	0.1		51.20

\*with operating ring


#### Balancing made fast, easy, and accurate with QuickSetter+™

Features include:


- Three connection sizes: 1/2", 3/4" and 1" sweat union
- Two flow range options: .5—1.75 gpm scale or 2—7 gpm scale
- Stainless steel flow adjuster
- Memory flow indicator
- Built-in flow check valve
- Temperature gauge (optional)
- IAPMO certified low-lead

Connection	Flow rate (gpm)	Fully open Cv
1/2" sweat	0.5 - 1.75	1.0
3/4" sweat	0.5 - 1.75	1.0
1" sweat	0.5 - 1.75	1.0
1/2" sweat	2.0 - 7.0	6.3
3/4" sweat	2.0 - 7.0	6.3
1" sweat	2.0 - 7.0	6.3


#### Operating principle

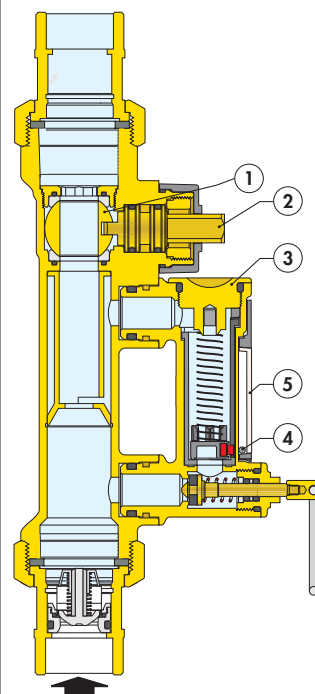

The control mechanism is a stainless steel ball stem valve (1), operated by a control stem (2). The flow rate is manually and properly set by use of the convenient onboard flow meter (3) housed in a bypass circuit on the valve body. This circuit is automatically shut off during normal operation. The flow rate is indicated by a metal ball (4) sliding inside a transparent channel (5) with an integral graduated scale (6).



#### Balanced example

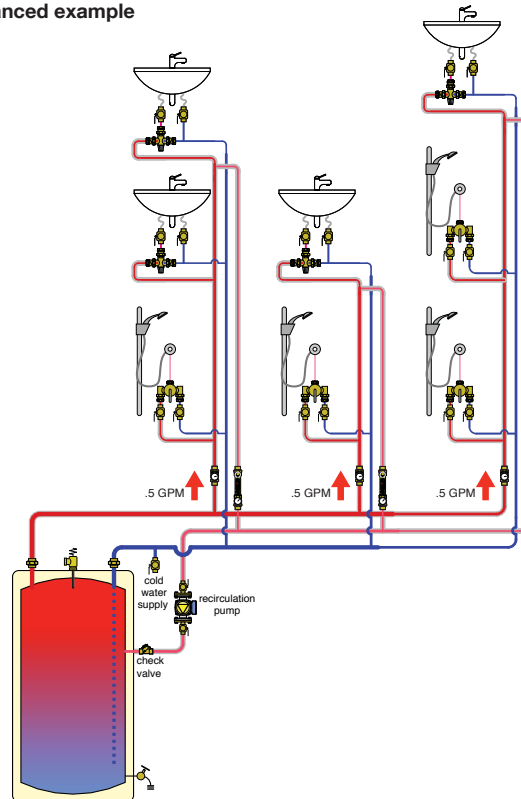



## VARIABLE ORIFICE STATIC BALANCING VALVE

NEW



### 142 Variable Orifice Balancing Valve

tech. broch. 01250

Memory stop feature  
Characterized plug for smooth adjustment.  
Maximum working pressure: 232 psi.  
Working temperature range: 14–250°F.  
DZR low-lead brass body.  
Certified low lead.



Code	Description	Cv	Lbs	USD
142241A	½" NPT	3.4	1.0	155.00
142251A	¾" NPT	5.0	1.2	165.00
142261A	1" NPT	7.5	1.5	225.00
142271A	1¼" NPT	12.9	2.3	320.00
142281A	1½" NPT	16.8	3.0	360.00
142291A	2" NPT	22.0	3.5	460.00




Insulation shell fits 142 series balancing valves.

#### Operating Principle


The 142 is a variable orifice balancing valve for hydronic heating and cooling systems, plus low lead for plumbing circuits. Characterized flow plug which provides precise system balancing valves and highly accurate flow verses other setters with ball valve control.

A compact body design with integral PT ports, a memory stop feature designed to accurately lock valve settings, with a hex key, enabling the valve to be closed and re-opened to the exact pre-set position which eliminates the need for rebalancing after servicing, heat and impact resistant glass-reinforced nylon adjustment knob, EPDM valve plug seal for accurate control and tight shut-off for isolation purposes.

The flow rate is determined according to the pressure drop valve measured by a differential pressure meter connected to the pressure test ports.


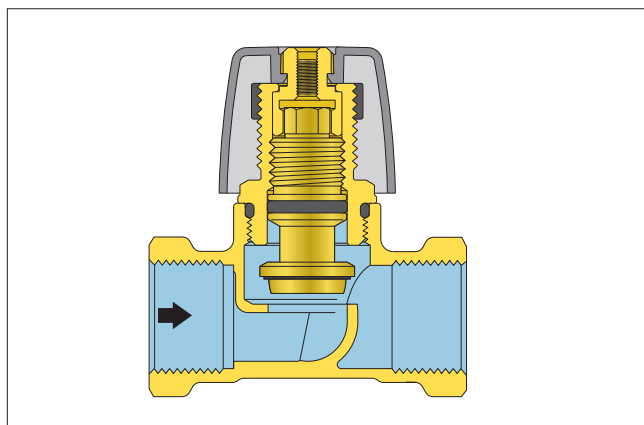


Code	Description	Lbs	USD
CBN142241A	Fits ½"	0.1	37.20
CBN142251A	Fits ¾"	0.1	39.60
CBN142261A	Fits 1"	0.1	54.00
CBN142271A	Fits 1¼"	0.1	76.80
CBN142281A	Fits 1½"	0.1	86.40

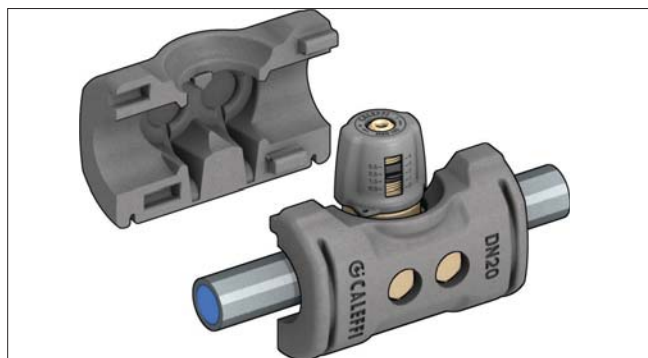

#### Memory Stop


Each 360 degree rotation of the adjustment knob moves the turn indicator by one position, ranging from 0 (valve closed) to 4 (valve fully open). After adjusting the flow rate, insert a 2.5 mm hex key in the hex hole, fully turn it clockwise without forcing it. This sets the valve's maximum stroke position. If necessary, it is possible to shutoff the balancing valve by turning the adjustment knob fully clockwise manually. To restore the valve to the pre-set position, turn the adjustment knob fully counter-clockwise.





## FITTINGS

This diagram is an example

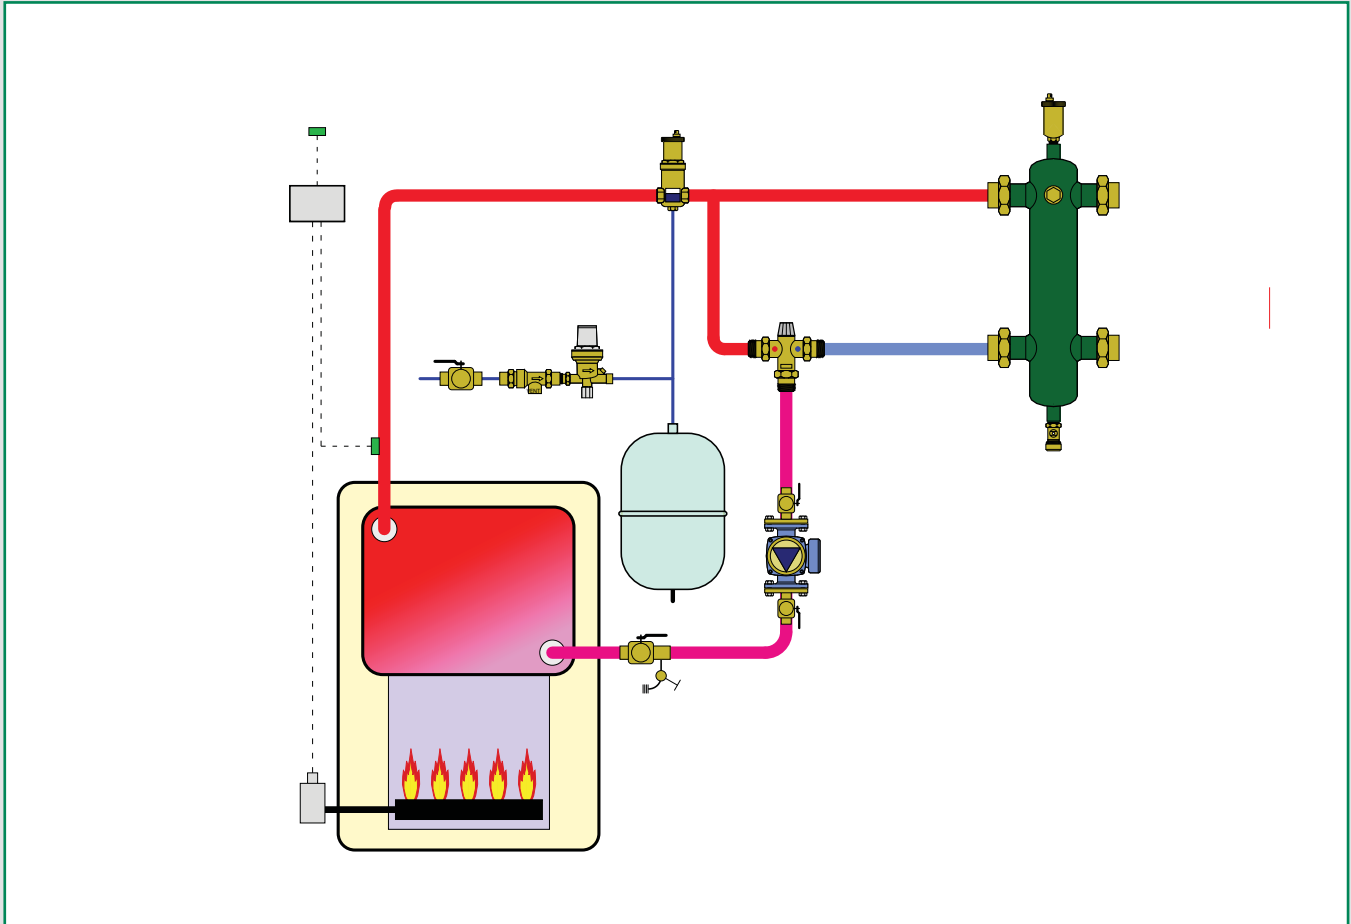

Fittings kits

Presscon™ fitting kits

Sweat union sets

In-line check valves

Mixing valve fittings

Zone valve fittings

AutoFill™ and backflow preventer fittings

Hydro separator fittings

Elbows, Tees and Crosses

## FITTING KITS



Two union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12240</b>	½" NPT with 1" union nuts	0.2	<b>42.80</b>
<b>NA12249</b>	½" sweat with 1" union nuts	0.2	<b>40.50</b>



Two union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12250</b>	¾" NPT with 1" union nuts	0.2	<b>46.80</b>
<b>NA12259</b>	¾" sweat with 1" union nuts	0.2	<b>44.50</b>



Two union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12260</b>	1" NPT with 1" union nuts	0.3	<b>56.90</b>
<b>NA12269</b>	1" sweat with 1" union nuts	0.3	<b>54.60</b>



Three union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12340</b>	½" NPT with 1" union nuts	0.3	<b>64.30</b>
<b>NA12349</b>	½" sweat with 1" union nuts	0.3	<b>60.80</b>



Three union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12350</b>	¾" NPT with 1" union nuts	0.3	<b>70.20</b>
<b>NA12359</b>	¾" sweat with 1" union nuts	0.3	<b>66.80</b>



Three union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12360</b>	1" NPT with 1" union nuts	0.4	<b>85.40</b>
<b>NA12369</b>	1" sweat with 1" union nuts	0.4	<b>81.90</b>

## PRESSCON™ FITTING KITS



Two ¾" Presscon™ copper press tail pieces with 1" brass union nuts and washers.  
Low-lead.

Code	Description	Lbs	USD
<b>NA12256</b>	¾" press with 1" union nut	0.2	<b>52.50</b>



Three ¾" Presscon™ copper press tail pieces with 1" brass union nuts and washers.  
Low-lead.

Code	Description	Lbs	USD
<b>NA12356</b>	¾" press with 1" union nut	0.3	<b>78.75</b>

## SWEAT UNIONS



Sweat union with 1" union thread nut.

Code	Description	Lbs	USD
<b>NA12153</b>	¾" sweat union	0.7	<b>50.70</b>



Sweat union with 1" union thread nut.

Code	Description	Lbs	USD
<b>NA12154</b>	1" sweat union	0.9	<b>55.80</b>



Sweat union with 1¼" union thread nut.

Code	Description	Lbs	USD
<b>NA12155</b>	1" sweat union	1.0	<b>79.40</b>

## IN-LINE FLOW CHECK VALVES



In-line union sweat flow check valve.  
Max percentage of glycol: 50%.  
Max working pressure: 150 psi.  
Temperature range: 32 – 250°F.  
Opening pressure: 0.29 psi.

Code	Description	Cv	Lbs	USD
<b>NA51059</b>	¾" sweat union	12	0.7	<b>74.40</b>



In-line union sweat flow check valve.  
Max percentage of glycol: 50%.  
Max working pressure: 150 psi.  
Temperature range: 32 – 250°F.  
Opening pressure: 0.29 psi.

Code	Description	Cv	Lbs	USD
<b>NA51069</b>	1" sweat union	17	1.0	<b>95.00</b>

## SMALL MIXING VALVE AND ZONE VALVE FITTINGS



Tail piece with check valve.  
Low lead brass.

Code	Description	Lbs	USD
<b>59893A</b>	½" NPT male fits 1" nut	0.2	<b>34.80</b>
<b>59840A</b>	¾" NPT male for 1" nut	0.3	<b>39.50</b>



Tail piece without check valve.  
Low lead brass.

Code	Description	Lbs	USD
<b>R31981</b>	½" NPT male fits 1" nut	0.4	<b>13.90</b>
<b>31901A</b>	¾" NPT male fits 1" nut	0.4	<b>15.60</b>



Tail piece.  
Low lead brass. Requires sealing washer  
R50055, not included.

Code	Description	Lbs	USD
<b>59817A</b>	1" NPT male with 1" nut	0.2	<b>26.90</b>
<b>59894A</b>	1" NPT male with 1" nut w/check valve	0.4	<b>64.80</b>



Tail piece with check valve.  
Low lead brass.

Code	Description	Lbs	USD
<b>59904A</b>	½" sweat fits 1" nut	0.2	<b>32.40</b>
<b>59905A</b>	¾" sweat fits 1" nut	0.3	<b>38.20</b>



¾" Presscon™ copper press tail piece  
with 1" brass union nut. Requires sealing  
washer R50055, not included.

Code	Description	Lbs	USD
<b>NA16265</b>	¾" press with 1" union nut	0.1	<b>26.25</b>



Tail piece.  
Low lead brass.

Code	Description	Lbs	USD
<b>NA10002</b>	½" sweat fits 1" nut	0.3	<b>12.50</b>
<b>NA10003</b>	¾" sweat fits 1" nut	0.4	<b>14.50</b>



Tail piece.  
Low lead brass. Requires sealing washer  
R50055, not included.

Code	Description	Lbs	USD
<b>59834A</b>	1" sweat with 1" nut	0.4	<b>25.20</b>
<b>59906A</b>	1" sweat with 1" nut w/check valve	0.4	<b>62.50</b>



Tail piece with high temperature check valve.  
Low lead brass.

Code	Description	Lbs	USD
<b>NA10164</b>	½" sweat fits 1" nut	0.2	<b>32.40</b>
<b>NA10165</b>	¾" sweat fits 1" nut	0.3	<b>38.20</b>



Tail piece with high temperature check valve.  
Low lead brass. Requires sealing washer  
R50055, not included.

Code	Description	Lbs	USD
<b>NA10166</b>	1" sweat with 1" nut w/check valve	0.4	<b>62.50</b>



Union nut fits 5213, 521 & 2521 series.  
Low lead brass.

Code	Description	Lbs	USD
<b>F61008</b>	1" brass nut	0.2	<b>5.70</b>
<b>F61008/C</b>	1" chrome-plated nut	0.2	<b>6.80</b>



Washer fits 5213, 521 & 2521 series.  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>F50055</b>	1" union washer	0.1	<b>2.10</b>



Washer fits 5213, 521 & 2521 series.  
High temperature silicone rubber.  
Working temperature: -40—350°F  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>NA10302</b>	1" union washer high temp silicone	0.1	<b>3.20</b>



Point of distribution mixed temperature  
gauge adaptor fits MixCal™ 521 series  
mixing valves. Threaded union mounting  
replaces existing mixed outlet with ¾" or 1"  
sweat pipe connection. Removable gauge  
fits into temperature well. Gauge dial is 2"  
diameter and scale from 30—210°F.  
Low-lead brass body.



Code	Description	Lbs	USD
<b>NA10328</b>	½" sweat with gauge	0.4	<b>73.80</b>
<b>NA10056</b>	¾" sweat with gauge	0.4	<b>81.10</b>
<b>NA10058</b>	1" sweat with gauge	0.4	<b>89.00</b>
<b>NA10358</b>	1" union thread with gauge	0.5	<b>90.50</b>
<b>NA10315</b>	1¼" sweat with gauge	0.5	<b>178.90</b>
<b>688003A</b>	Replacement gauge	0.2	<b>50.30</b>

## 5231 SERIES MIXING VALVE FITTINGS



Tail piece, all connections.  
Low lead brass.  
Use with 1½" union nut.

Code	Description	Lbs	USD
<b>31554 FD</b>	1" sweat, fits 523168A	0.3	<b>45.20</b>
<b>41787 CST</b>	1¼" sweat, fits 523177 & 523178A	0.3	<b>52.50</b>



Tail piece, all connections.  
Low lead brass.  
Use with 2½" union nut.

Code	Description	Lbs	USD
<b>41788 CST</b>	1½" sweat, fits 523188A	0.3	<b>70.40</b>
<b>41789 CST</b>	2" sweat, fits 523198A	0.5	<b>91.40</b>



Tail piece, all connections.  
Low lead brass.  
Use with 1½" union nut.

Code	Description	Lbs	USD
<b>NA10009</b>	1" NPT male, fits 523160A	0.2	<b>57.00</b>
<b>R41660</b>	1¼" NPT male, fits 523170A	0.3	<b>65.20</b>



Tail piece, all connections.  
Low lead brass.  
Use with 2½" union nut.

Code	Description	Lbs	USD
<b>41371A</b>	1½" NPT male, fits 523180A	0.2	<b>73.50</b>
<b>41372A</b>	2" NPT male, fits 523190A	0.2	<b>94.50</b>



Washer fits 523160A, 68A, 70A, 77A, 78A.  
Use with 1½" union nut.

Code	Description	Lbs	USD
<b>R50057</b>	1½" union washer	0.1	<b>4.40</b>



Washer fits 523180A, 88A, 90A, 98A.  
Use with 2½" union nut.

Code	Description	Lbs	USD
<b>R50060</b>	2½" union washer	0.1	<b>21.10</b>



Union nut fits 523160A, 68A, 70A, 77A, 78A.

Code	Description	Lbs	USD
<b>R31589</b>	1½" union nut	0.4	<b>19.50</b>



Union nut fits 523180A, 88A, 90A, 98A.

Code	Description	Lbs	USD
<b>R51838</b>	2½" union nut	0.5	<b>47.30</b>

## AUTOFILL™ FITTINGS



AutoFill™ union nut.

Code	Description	Lbs	USD
<b>F41186</b>	¾" union nut	0.1	<b>4.50</b>



AutoFill™ tail piece.

Code	Description	Lbs	USD
<b>NA10001</b>	½" sweat	0.3	<b>12.50</b>



AutoFill™ tail piece.

Code	Description	Lbs	USD
<b>F31868</b>	½" NPT M	0.1	<b>15.10</b>


AutoFill™ washer.  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>R50058</b>	¾" union washer	0.1	<b>1.80</b>

## BACKFLOW PREVENTER FITTINGS



Tail piece with screen fits 573 backflow preventer.

Code	Description	Lbs	USD
<b>31970A</b>	½" NPT female	0.1	<b>18.00</b>



Tail piece with screen fits 573 backflow preventer.

Code	Description	Lbs	USD
<b>41380A</b>	½" sweat female	0.1	<b>18.00</b>



Washer union fits 573 backflow preventer.

Code	Description	Lbs	USD
<b>R50065</b>	Union washer	0.1	<b>4.30</b>

## HYDRO SEPARATOR FITTINGS



Tail piece.

Code	Description	Lbs	USD
<b>31553 FD</b>	1" NPT female, fits 548006A	0.3	<b>22.50</b>
<b>31401 FD</b>	1¼" NPT female, fits 548007A	0.3	<b>50.90</b>
<b>R41441</b>	1½" NPT female, fits 548008A	0.3	<b>49.20</b>
<b>31426 FD</b>	2" NPT female, fits 548009A	0.4	<b>100.60</b>



Tail piece.

Code	Description	Lbs	USD
<b>31554 FD</b>	1" sweat, fits 548096A	0.3	<b>45.20</b>
<b>31403 FD</b>	1¼" sweat, fits 548097A	0.3	<b>84.00</b>
<b>41882A</b>	1½" sweat, fits 54898A	0.3	<b>79.40</b>
<b>31428 FD</b>	2" sweat, fits 548099A	0.4	<b>130.10</b>



Union nut.

Code	Description	Lbs	USD
<b>R31589</b>	Fits 548006A and 548096A	0.4	<b>19.50</b>
<b>R53003</b>	Fits 548007A and 548097A	0.4	<b>38.60</b>
<b>R53004</b>	Fits 548008A and 548098A	0.4	<b>38.60</b>
<b>R53005</b>	2" fits 548009A and 548099A	0.4	<b>44.10</b>



Union washer.

Code	Description	Lbs	USD
<b>R50005</b>	Fits 1" 548006A and 549096A	0.2	<b>4.30</b>
<b>R50008</b>	Fits 1¼" 548007A and 548097A	0.2	<b>9.00</b>
<b>R50047</b>	Fits 1½" 548008A and 548098A	0.2	<b>17.90</b>
<b>R50048</b>	Fits 2" 548009A and 548099A	0.2	<b>21.80</b>

## FITTINGS WITH 3/4" THREADS



Double nipple.

Code	Description	Lbs	USD
<b>NA12122</b>	3/4" x 3/4" male	0.3	<b>27.30</b>



Double nipple.

Code	Description	Lbs	USD
<b>NA12172</b>	3/4" NPT x 3/4" NPT	0.3	<b>27.30</b>



Union nut.

Code	Description	Lbs	USD
<b>F41186</b>	3/4" union nut	0.1	<b>4.50</b>



Sweat adapter.

Code	Description	Lbs	USD
<b>NA10118</b>	3/4" sweat x 3/4" male thread	0.3	<b>27.30</b>



Nipple.

Code	Description	Lbs	USD
<b>NA12152</b>	3/4" male w/ O-ring x 3/4" male thread	0.3	<b>29.20</b>

## FITTINGS WITH 1" THREADS



Double nipple.

Code	Description	Lbs	USD
<b>NA12123</b>	1" x 1" male thread	0.4	<b>34.10</b>



Double nipple.

Code	Description	Lbs	USD
<b>NA12173</b>	1" NPT x 1" NPT	0.4	<b>34.10</b>



Bushing.

Code	Description	Lbs	USD
<b>NA10060</b>	3/4" NPT female w/ 1" male thread	0.3	<b>27.30</b>



Sweat adapter.

Code	Description	Lbs	USD
<b>NA10061</b>	3/4" sweat adaptor w/ 1" male thd.	0.2	<b>28.50</b>



Sweat adapter.

Code	Description	Lbs	USD
<b>NA10062</b>	1" sweat adaptor w/ 1" male thd.	0.1	<b>29.50</b>



## FITTINGS WITH 1" THREADS

Nipple.



Code	Description	Lbs	USD
<b>NA10064</b>	1" NPT w/ 1" male thread	0.2	<b>30.70</b>

Nipple.



Code	Description	Lbs	USD
<b>NA12162</b>	¾" male w/ O-ring x 1" male thread	0.2	<b>31.60</b>

Bushing.



Code	Description	Lbs	USD
<b>NA10089</b>	¾" female thread x 1" male thread	0.1	<b>22.70</b>

Cap.



Code	Description	Lbs	USD
<b>NA10083</b>	1" male threaded plug	0.2	<b>17.00</b>

Disk.



Code	Description	Lbs	USD
<b>NA10104</b>	1" disk	0.1	<b>4.50</b>

## FITTINGS WITH 1¼" THREADS

Double nipple.



Code	Description	Lbs	USD
<b>NA12124</b>	1¼" x 1¼" thread	0.4	<b>54.60</b>

Sweat adapter.



Code	Description	Lbs	USD
<b>NA10119</b>	1" sweat adapter x 1¼" union thread	0.4	<b>37.50</b>

Bushing.



Code	Description	Lbs	USD
<b>NA10087</b>	1" female x 1¼" male thd. bushing	0.4	<b>27.50</b>

Bushing.



Code	Description	Lbs	USD
<b>61215A</b>	1" NPT F x 1¼" M thd. bushing	0.8	<b>27.30</b>

Nipple.



Code	Description	Lbs	USD
<b>R31706</b>	1" male x 1¼" male nipple	0.1	<b>34.10</b>

Cap.



Code	Description	Lbs	USD
<b>NA10236</b>	1¼" male threaded plug	0.1	<b>21.40</b>

Disk.



Code	Description	Lbs	USD
<b>R11059</b>	1¼" female disk	0.1	<b>5.70</b>

## FITTINGS



(NAL6263 shown)

Brass fittings, elbows.  
Male (M) straight thread.  
Female (F) straight thread.  
Female (F) union nut.  
22mm female compression.



(NAC6TT26341 shown)

Brass fittings, cross.  
Male (M) straight thread (thd).  
Female (F) straight thread (thd).  
Female (F) union nut.  
NPT (F) Female.  
22mm female compression.  
Sweat (F).

Code	Description	Lbs	USD
<b>NAL5263</b>	¾" M thread x 1" F union nut	0.4	<b>69.80</b>
<b>NAL5736</b>	¾" F thread x 22mm comp.	0.4	<b>53.00</b>
<b>NAL6262</b>	1" M thread x 1" M thread	0.4	<b>39.50</b>
<b>NAL6263</b>	1" M thread x 1" F union nut	0.4	<b>51.70</b>
<b>NAL6273</b>	1" M thread x 1¼" F union nut	0.4	<b>84.30</b>
<b>NAL6363</b>	1" F union nut x 1" F union nut	0.4	<b>63.80</b>
<b>NAL7262</b>	1¼" M thread x 1" M thread	0.4	<b>67.00</b>
<b>NAL7263</b>	1¼" M thread x 1" F union nut	0.4	<b>79.20</b>
<b>NAL7273</b>	1¼" M thread x 1¼" F union nut	0.4	<b>111.80</b>

Code	Description	Lbs	USD
<b>NAC41TT5454</b>	½" NPT F x T. well x ¾" Sweat x ¾" Swt	2.0	<b>176.50</b>
<b>NAC41626236</b>	½" NPT F x 1" M x 1" M x 22mm comp.	2.0	<b>126.50</b>
<b>NAC623641TT</b>	1" M x 22mm x ½" NPT F x T. well	2.0	<b>165.20</b>
<b>NAC6262TT41</b>	1" M x 1" M x T. well x ½" NPT F	2.0	<b>142.50</b>
<b>NAC6263TT41</b>	1" M x 1" F nut x T. well x ½" NPT F	2.0	<b>154.70</b>
<b>NAC62TT6241</b>	1" M x T. well 1" M x ½" NPT F	2.0	<b>142.50</b>
<b>NAC62TT6341</b>	1" M x T. well x 1" F nut x ½" NPT F	2.0	<b>154.70</b>
<b>NAC72TT6241</b>	1¼" M x T. well x 1" M x ½" NPT F	2.0	<b>170.00</b>
<b>NAC72TT7241</b>	1¼" M x T. well x 1¼" M x ½" NPT F	2.0	<b>197.50</b>






(NAT634162 shown)

Brass fittings, Tees.  
Male (M) straight thread (thd).  
Female (F) straight thread (thd).  
Female (F) union nut.  
NPT (F) Female.  
22mm female compression.  
Sweat (F)

Code	Description	Lbs	USD
<b>NAT417272</b>	½" NPT F x 1¼" M thd x 1¼" M thd	0.6	<b>111.20</b>
<b>NAT523641</b>	¾" M thd x 22mm comp. x ½" NPT F	0.6	<b>90.50</b>
<b>NAT524136</b>	¾" M thd x ½" NPT F x 22mm comp.	0.6	<b>90.50</b>
<b>NAT545641</b>	¾" Sweat x ¾" comp. x ½" NPT F	0.6	<b>77.00</b>
<b>NAT574136</b>	¾" F thd x ½" NPT F x 22mm comp.	0.6	<b>61.30</b>
<b>NAT623641</b>	1" M thd x 22mm comp. x ½" NPT F	0.6	<b>70.50</b>
<b>NAT624136</b>	1" M thd x ½" NPT F x 22mm comp	0.6	<b>70.50</b>
<b>NAT624162</b>	1" M thd x ½" NPT F x 1" M thd	0.6	<b>47.80</b>
<b>NAT626241</b>	1" M thd x 1" M thd x ½" NPT F	0.6	<b>47.80</b>
<b>NAT626262</b>	1" M thd x 1" M thd x 1" M thd	0.6	<b>48.90</b>
<b>NAT626341</b>	1" M thd x 1" F union nut x ½" NPT F	0.6	<b>60.00</b>
<b>NAT626362</b>	1" M thd x 1" F union nut x 1" M thd	0.6	<b>61.10</b>
<b>NAT6263TT</b>	1" M thd x 1" F union nut x Temp well	0.6	<b>99.80</b>
<b>NAT62TT63</b>	1" M thd x Temp well x 1" F union nut	0.6	<b>99.80</b>
<b>NAT634162</b>	1" F union nut x ½" NPT F x 1" M thd	0.6	<b>60.00</b>
<b>NAT636262</b>	1" F union nut x 1" M thd x 1" M thd	0.6	<b>61.10</b>
<b>NAT6362TT</b>	1" F union nut x 1" M thd x Temp well	0.6	<b>99.80</b>
<b>NAT724162</b>	1¼" M thd x ½" NPT F x 1" M thd	0.6	<b>75.30</b>
<b>NAT724164</b>	1¼" M thd x ½" NPT F x 1" Sweat	0.6	<b>106.60</b>
<b>NAT417264</b>	½" NPT F x 1¼" M thd x 1" Sweat	0.6	<b>106.60</b>
<b>NAT724172</b>	1¼" M thd x ½" NPT F x 1¼" M thd	0.6	<b>111.20</b>
<b>NAT72TT72</b>	1¼" M thd x Temp well x 1¼" M thd	0.6	<b>159.00</b>

## SPECIAL CONFIGURED FITTINGS




Brass fittings are configured by starting at 12:00 position and moving clockwise to 3:00 position followed by clockwise to 6:00 position ending with 9:00 position on cross. Special order any configuration of fitting by specifying connections type and size plus clock position.

Code	Description	Lbs	USD
<b>NALXXXX</b>	Special configured elbow	0.4	<b>CF*</b>
<b>NATXXXXXX</b>	Special configured tee	0.6	<b>CF*</b>
<b>NACXXXXXXXX</b>	Special configured cross	2.0	<b>CF*</b>

\*Consult factory.

## SOLAR COMPONENTS

This diagram is an example

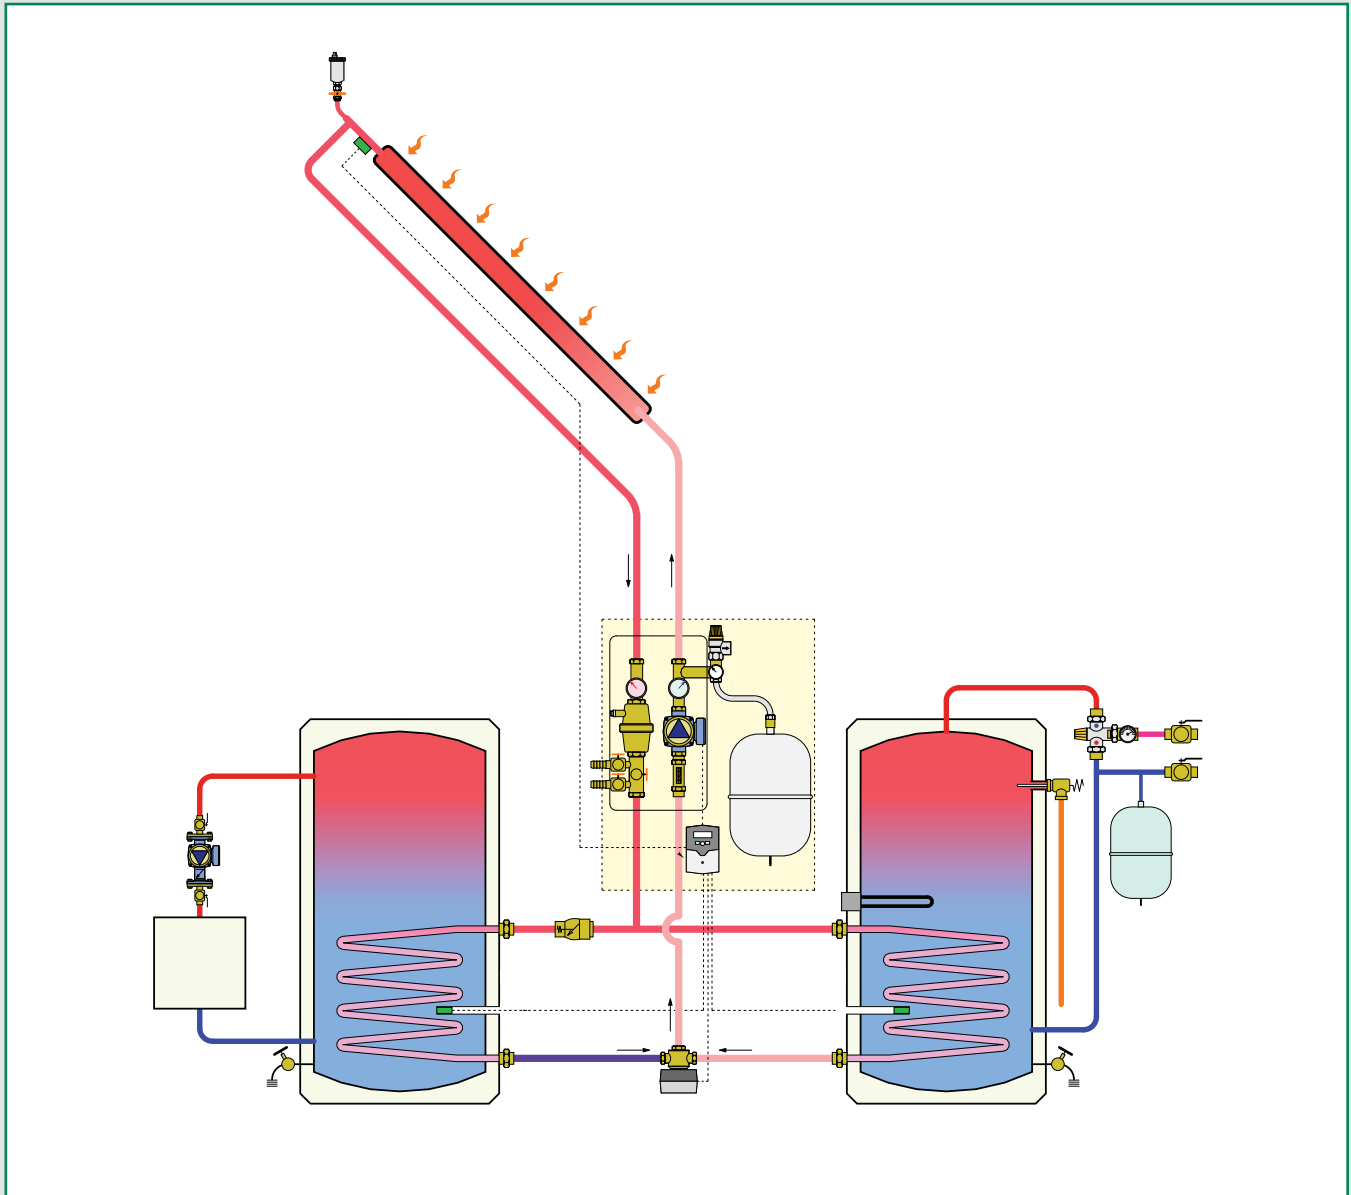

Solar collectors, StarMax V™

Storage tanks, SolarCon™

Expansion tanks

Solar pump stations

Drainback pump station

DC solar pump

In-line flow meter / balancing valves

In-line check valves

High temperature glycol

Solar air vents and air separators

Low lead mixing valves

SolarFlex™ piping

iSolar™ differential temperature controllers

Flow meters

iSolar™ data loggers

Complete solar water heaters

## SOLAR COLLECTORS



### NAS154 StarMax V™

tech. broch. 01271

Star Max V™ flat plate collectors heat fluid from solar energy for solar water heater and space heating systems.

Fluids: water, glycol solutions.

Maximum percentage of glycol: 60%.

Working pressure: 90 psi.

Max. test pressure: 150 psi.

Working temperature: -40—350°F.

Typical transfer flow rate: 0.5—1.2 gpm.

Wind load rating: 180 mph.

Connections: (5) 1" male union thread.


SRCC Category C: 40 kBtu/day.

Approvals: SRCC OG-100.

Patented.




#### Drainback installation

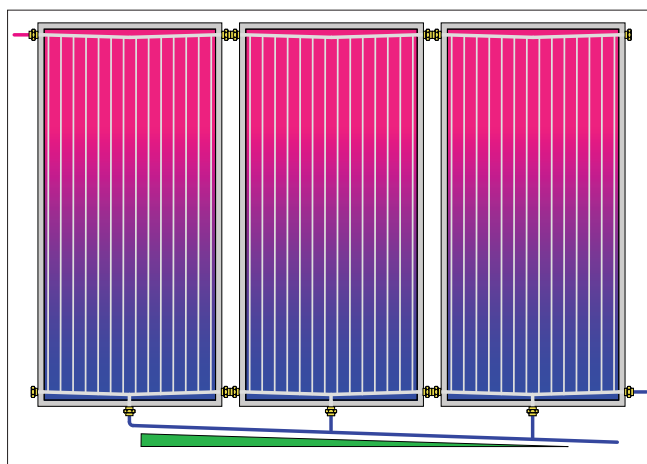

External manifold is connected to the bottom outlet of each collector and is sloped ¼" per foot for proper flow in drainback installation. Collector top and bottom headers are connected together with code NA10272 collector union and opposite outlets are capped with code 586600 cap.

#### Standard Pressurized installation

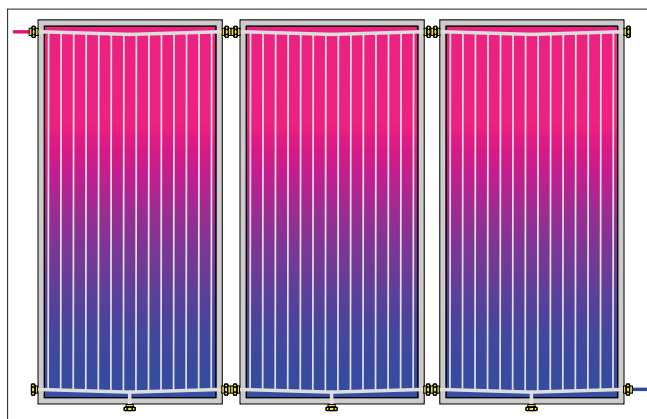

Bottom outlets of each collector remained capped for standard installation. Collector top and bottom headers are connected together with code NA10272 collector union and opposite outlets are capped with code 586600.

Code	Description	Lbs	USD
<b>NAS15410</b>	StarMax V™ 4' x 10', five outlets	153	<b>3,625.00</b>
<b>NA10126</b>	Crating for NAS15410 (1—6 collectors)	<b>net</b>	<b>100.00</b>

#### Function

The StarMax V™ patented flat plate collector is designed with two internal headers which are sloped to the center by ½" from each side. In the center of bottom sloped header is a fifth outlet which allows for filling and draining of fluid from the collector. This unique sloped internal headers allow the collector array to be mounted perfectly horizontal, rather than sloped in drainback installation. The bottom outlets are connected to an external sloped manifold on or under the roof. When used in a standard pressured glycol installation, the bottom center outlet is capped and the array is connected the same way as a standard four outlet collector.

#### Construction details

Header - riser tubes: copper.

Absorber fin: copper.

Fin coating: blue selective.

Connection: 1" union thread.

Outlet grommets: silicone

Frame: extruded aluminum.

Frame: powdered coated.

Frame: welded corners.


Back sheet: embossed PVC

Insulation liner: foil

Insulation: injected molded polyurethane Insulation

Glass: tempered low iron prismatic.

Glass thickness: 4 mm.

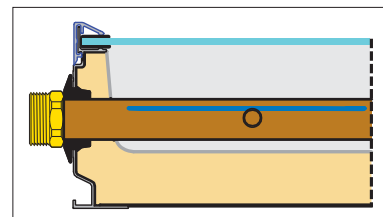

#### Features



Temperature sensor well weather tight grommet is attached direct to absorber fin for accurate collector temperature measurement in drainback installations. Fully welded frame keeps collector frame ridged and weather tight.



Bottom center outlet is protected with a 586600 factory installed cap. Removable bottom outlet access cover allows for easy absorber removal. Baked on powered coating protects collector frame from harsh salt spray environments.

## SOLAR COLLECTOR MOUNTING



Brass collector union cap for both standard and drainback installation. Use NA10302 silicone union gasket.

Code	Description	Lbs	USD
<b>586600</b>	1" female thread cap	0.2	<b>13.40</b>



High temperature silicone flat 1" gasket for drainback connections. Use with 586600 cap and sweat tail piece connections.

Code	Description	Lbs	USD
<b>NA10302</b>	1" flat silicone gasket	0.1	<b>3.20</b>



Brass collector union for multiple collector header installations. Excellent dry high temperature sealing with silicone O-ring pre-installed inside union.

Code	Description	Lbs	USD
<b>NA10272</b>	1" female thread union	0.5	<b>52.50</b>



Red silicone o-ring, replacement for NA10272.

Code	Description	Lbs	USD
<b>NA10271</b>	Red silicone o-ring	0.1	<b>4.20</b>



Tilt mounting brackets and hardware allows tilt mounting of collectors.

Code	Description	Lbs	USD
<b>NAS10006</b>	Tilt mounting kit	5	<b>231.00</b>



Collector clip secures collectors directly to 2 inch four slot rail with (4) stainless steel  $\frac{3}{8}$ "-16 x 1" bolts, nuts & washers.

Code	Description	Lbs	USD
<b>NAS10007</b>	Collector clip kit	0.5	<b>37.80</b>



Aluminum 6005-T5 square tube extension for tilting flat plate collectors. Connects with tilt mounting U brackets.

Code	Description	Lbs	USD
<b>NAS10002</b>	1" square tube x 6'	2	<b>140.70</b>
<b>NAS10005</b>	1" square tube x 12'	4	<b>252.00</b>



2 inch four slot rail has four  $\frac{9}{16}$ " slots which accept standard stainless steel  $\frac{3}{8}$ " bolt and nut for mounting collector clips and U mounts to flashing. Aluminum 6005-T5 2 inch four slot rail can span 7 ft. in moderate wind and snow loads applications.

Code	Description	Lbs	USD
<b>NAS10040-1</b>	2 inch four slot rail 58" for one collector	6	<b>100.50</b>
<b>NAS10040-2</b>	2 inch four slot rail 108" for two collector	10	<b>187.10</b>
<b>NAS10040-20</b>	2 inch four slot rail 240" for cutting	22	<b>415.80</b>



Mounts directly on top of NAS10030 roof flashing with  $\frac{3}{8}$ " standard stainless steel nut. Attaches into the side slots of 2 inch four slot rail using NAS10042 stainless steel  $\frac{3}{8}$ "-16 x 1" bolts, nuts & washers.

Code	Description	Lbs	USD
<b>NAS10041</b>	Four slot rail 2" U mount	0.5	<b>16.80</b>



Two stainless steel  $\frac{3}{8}$ " -16 x 1" bolts, nuts & washers, ASTM F593C.

Code	Description	Lbs	USD
<b>NAS10042</b>	Bolt, nut & washer kit	0.2	<b>10.50</b>



Aluminum splice bars joins 2 inch four slot rail sections together. Includes stainless steel  $\frac{3}{8}$ " bolts & washers. Requires two bars for each splice.

Code	Description	Lbs	USD
<b>NAS10023</b>	2 inch four slot rail splice bar	0.5	<b>15.80</b>



Flashing kit with  $\frac{3}{8}$ " stud for attaching U mounts and other brackets using the supplied  $\frac{3}{8}$ " stainless steel nut & washer. Black painted aluminum 6061 T6 flashing 14 $\frac{1}{4}$ "L x 9 $\frac{1}{2}$ "W x 0.6"H ,galvanized steel base plate with six mounting holes and double stud.

Code	Description	Lbs	USD
<b>NAS10030</b>	Flashing kit	1.5	<b>78.80</b>



Galvanized steel base plate with  $\frac{3}{8}$ "-16 center thread and six mounting holes, can be used under a truss or rafter.

Code	Description	Lbs	USD
<b>NAS10032</b>	Steel base plate	0.5	<b>29.40</b>

## COMPLETE SOLAR WATER HEATER SYSTEMS



### NAS300

The prepackaged, specially engineered solar water heating system includes all of the components needed for a standard installation — from the solar collectors, to the pump station and controller, to pre-insulated piping, to the storage tank, and all of the necessary hardware and components.

System storage tanks code numbers:

- 50 gal. single coil with electric element (NAS20053).
- 80 gal. single coil with electric element (NAS20083).
- 80 gal. dual coil without electric element (NAS20082).
- 120 gal. single coil with electric element (NAS20123).
- 120 gal. dual coil without electric element (NAS20122).

System collector code numbers:

- 4' x 6.5' flat plate (NAS10406).
- 4' x 8' flat plate (NAS10408).
- 4' x 10' flat plate (NAS10410).

System approvals: SRCC OG-300 certified.

Energy Star Rated.

\* System components shown on page 83.

#### 50 Gal. Single Coil Tank Systems

Code	Description	Collectors	Energy Star Solar Fraction	Lbs.	USD
<b>NAS30020-P</b>	no collector			490	<b>8,596.00</b>
<b>NAS30020</b>	4' x 6.5' collector	1		590	<b>12,273.00</b>
<b>NAS300201</b>	4' x 6.5' collector	2	0.63	680	<b>15,051.00</b>
<b>NAS30020P8</b>	4' x 8' collector	1		615	<b>12,690.00</b>
<b>NAS300201P8</b>	4' x 8' collector	2	0.72	730	<b>15,983.00</b>
<b>NAS30020P10</b>	4' x 10' collector	1	0.50	655	<b>13,127.00</b>
<b>NAS300201P10</b>	4' x 10' collector	2	0.82	810	<b>16,857.00</b>

#### 80 Gal. Single Coil Tank Systems

Code	Description	Collectors	Energy Star Solar Fraction	Lbs.	USD
<b>NAS30040-P</b>	no collector			660	<b>9,907.00</b>
<b>NAS30040</b>	4' x 6.5' collector	2	0.63	760	<b>16,384.00</b>
<b>NAS300401</b>	4' x 6.5' collector	3	0.82	850	<b>19,306.00</b>
<b>NAS30040P8</b>	4' x 8' collector	2	0.74	785	<b>17,346.00</b>
<b>NAS300401P8</b>	4' x 8' collector	3	0.94	900	<b>20,710.00</b>
<b>NAS30040P10</b>	4' x 10' collector	2	0.83	825	<b>18,220.00</b>
<b>NAS300401P10</b>	4' x 10' collector	3	0.95	980	<b>22,020.00</b>

#### 80 Gal. Dual Coil Tank Systems

Code	Description	Collectors	Energy Star Solar Fraction	Lbs.	USD
<b>NAS30042-P</b>	no collector			610	<b>10,453.00</b>
<b>NAS30042</b>	4' x 6.5' collector	2	0.73	810	<b>16,859.00</b>
<b>NAS300421</b>	4' x 6.5' collector	3	0.88	900	<b>19,852.00</b>
<b>NAS30042P8</b>	4' x 8' collector	2	0.80	835	<b>17,892.00</b>
<b>NAS300421P8</b>	4' x 8' collector	3	0.96	950	<b>21,256.00</b>
<b>NAS30042P10</b>	4' x 10' collector	2	0.88	875	<b>18,766.00</b>
<b>NAS300421P10</b>	4' x 10' collector	3	0.97	1030	<b>22,566.00</b>

#### 120 Gal. Single Coil Tank Systems

Code	Description	Collectors	Energy Star Solar Fraction	Lbs.	USD
<b>NAS30060-P</b>	no collector			670	<b>10,780.00</b>
<b>NAS30060</b>	4' x 6.5' collector	3	0.75	970	<b>20,087.00</b>
<b>NAS300601</b>	4' x 6.5' collector	4	0.92	1060	<b>23,071.00</b>
<b>NAS30060P8</b>	4' x 8' collector	3	0.87	995	<b>21,583.00</b>
<b>NAS300601P8</b>	4' x 8' collector	4	0.95	1110	<b>25,043.00</b>
<b>NAS30060P10</b>	4' x 10' collector	3	0.95	1035	<b>22,894.00</b>
<b>NAS300601P10</b>	4' x 10' collector	4	0.95	1190	<b>27,014.00</b>

#### 120 Gal. Dual Coil Tank Systems

Code	Description	Collectors	Energy Star Solar Fraction	Lbs.	USD
<b>NAS30062-P</b>	no collector			700	<b>11,326.00</b>
<b>NAS30062</b>	4' x 6.5' collector	3	0.82	1000	<b>20,562.00</b>
<b>NAS300621</b>	4' x 6.5' collector	4	0.93	1090	<b>23,617.00</b>
<b>NAS30062P8</b>	4' x 8' collector	3	0.91	1025	<b>22,129.00</b>
<b>NAS300621P8</b>	4' x 8' collector	4	0.97	1140	<b>25,589.00</b>
<b>NAS30062P10</b>	4' x 10' collector	3	0.97	1065	<b>23,440.00</b>
<b>NAS300621P10</b>	4' x 10' collector	4	0.97	1220	<b>27,560.00</b>



## SOLAR WATER HEATER COMPONENTS



Key	Code	Description
1	255060A	Dual-line solar pump station with 3/4" SolarFlex™ fittings
2	255007	Expansion tank mounting kit with double-check valve
3*	259012	3 gallon
	259018	5 gallon
	259025	7 gallon
	259033	9 gallon
		Tank size is system dependent
4	NA267003	Bracket to mount solar pump station to storage tank
5	257260A	iSolar™ Plus differential temperature controller
6	NA15006	Lightning protector
7	NA10092	18" SJ round cord connects pump to controller
8	NA3540-15	SolarFlex™ 3/4" x 50 ft. coil piping with fittings
9	NA12133	Hangers fits 3/4" SolarFlex™ (4 pcs)
10	NA3140-02	Two 3/4" flex pipes with insulation, 6' long
11	NA10093	Two 90-degree brass elbows 1" male union half
12	250041A	Automatic solar air vent, 1/2" NPT male
13	NA29284	Solar air vent shut-off valve, 1/2" NPT MxF
14	NAT624162	Tee 1" M union x 1/2" NPT F x 1" union nut
15	NA35001	EPDM insulation black tape, 1/8" x 2" x 25' roll
16	NA35002	UV-resistant black film tape, 2" x 30' roll
17*	NA12145	Connection kit fits 6.5' collectors
	NA12146	Connection kit fits even 8' and 10' collectors
	NA12147	Connection kit fits odd 8' and 10' collectors
18*	NAS10001	Universal foot mounts fits solar collectors
19*	NA10103	5-15 gallons glycol. NSF listed (amount model specific)

\*these items are not provided in the "-P" kits (kits without collectors)

## SOLAR COLLECTORS

### NAS104



Solar flat plate collectors for capturing solar thermal energy in solar heating systems.  
 Working pressure: 90 psi.  
 Max. test pressure: 150 psi.  
 Working temperature: -40—350°F.  
 Absorber material: copper.  
 Absorber coating: selective crystal.  
 Conn: 1" union NAS10406,  
 1 1/4" union NAS10408, NAS10410  
 Frame: extruded aluminum.  
 Frame construction: fastened corners.  
 Glass: tempered low iron.  
 Transfer rate: 0.5—1.8 gpm.  
 Wind load rating: 181 mph.  
 Approval: SRCC OG-100 certified.



Code	Description	Lbs	USD
NAS10406	4' x 6.5', Category C 25 kBtu/day	90	<b>2,756.00</b>
NA10100	Crating charge for NAS10406 (1—10)	net	<b>100.00</b>
NAS10408	4' x 8', Category C 32 kBtu/day	113	<b>3,255.00</b>
NAS10410	4' x 10', Category C 40 kBtu/day	153	<b>3,625.00</b>
NA10126	Crating for NAS10408 / NAS10410 (1—6)	net	<b>100.00</b>

### NAS100



Flat plate collector mounting brackets and tilt extensions.

Code	Description	Lbs	USD
NAS10001	Universal foot mount, 4 each	5	<b>280.40</b>
NAS10002	6' extension, 1" square tube	2	<b>140.70</b>



Includes washer (2), nut (2), disk (2) and plug (1).  
 For connecting odd or even number of 6.5' collectors.

Code	Description	Lbs	USD
NA12145	6.5' collector, odd or even number	2	<b>41.60</b>



Includes washer (3), washer (1), nut (2), disk (2), plug (1) and nipple (1).  
 For connecting even numbers of 8' and 10' collectors.

Code	Description	Lbs	USD
NA12146	8' & 10' collector, even number	3	<b>103.10</b>



Includes washer (3), nut (2), disk (2), plug (2) and thread, male (1).  
 For connecting odd numbers of 8' and 10' collectors.

Code	Description	Lbs	USD
NA12147	8' & 10' collector, odd number	3	<b>141.30</b>

## STORAGE TANKS



### NAS200 SolarCon™

Storage tanks can serve as either a domestic hot water tank or a thermal buffering tank with porcelain glass coated steel lining. Powder-coated steel external cover. Drain port/valve.

Max. working pressure: 150 psi.

Working temperature: -40—190°F.

Recommended max. delivery water temperature: 120°F.

Testing pressure: 300 psi.

Tank insulation: 2" non-CFC foam.

Insulation thermal conductivity: R16.

Temperature & pressure relief valve: 210°F/150 psi. (HX models)

Electric element: 4.5 Kw. UL listed.

Connections: 25 gal. no HX (6) 1½" NPT F top & side, (2) ¾" NPT F top & side.

Non HX (7) 2" NPT female side, (3) ¾" NPT female top.

50 gal. HX (2) 1" NPT male side, (2) ¾" NPT male on top.

80-119 gal. (1) HX (3) 1" NPT male side, (1) 1" NPT male top.

80-119 gal. (2) HX (5) 1" NPT male side, (1) 1" NPT male top.

\*Reduction of Lead in Drinking Water Act Compliant: 0.25% max. weighted average lead content. Certified through Underwriters Laboratory (UL) in accordance with NSF/ANSI 372.

#### Function

##### No HX:

Typical applications include where system design requires use of an external heat exchanger, an open solar thermal system, or when buffering storage capacity is required.

##### One HX:

A coil type solar loop HX is located in the lower portion of the tank. An electrical heating element provides boost heat for a one tank system, or is unused for a two tank pre-heat system.

##### Two HX:

Coil type HX's are located in the lower and upper portions of the tank. Common applications include using the upper HX for boost heat when connected to a back-up heat source, using the top HX for supplemental space heat, or connecting both HX's to the solar loop for layer loading.

##### Two HX with electrical element:

Typical application is for a one tank domestic hot water system with electric element boost, and utilizing upper HX for supplemental space heat.

Code	Description	Lbs	USD
<b>NAS20025</b>	25 gal. no HX	100	<b>2,657.00</b>
<b>NAS20050</b>	50 gal. no HX	200	<b>3,176.00</b>
<b>NAS20053</b>	50 gal. 1 HX, electric element	231	<b>4,043.00</b>
<b>NAS20080</b>	80 gal. no HX	250	<b>3,754.00</b>
<b>NAS20083</b>	80 gal. 1 HX, electric element	297	<b>5,486.00</b>
<b>NAS20082</b>	80 gal. 2 HX	327	<b>6,064.00</b>
<b>NAS20120</b>	119 gal. no HX	350	<b>4,967.00</b>
<b>NAS20123</b>	119 gal. 1 HX, electric element	397	<b>6,526.00</b>
<b>NAS20122</b>	119 gal. 2 HX	427	<b>7,161.00</b>
<b>NAS20124</b>	119 gal. 2 HX, electric element	429	<b>7,392.00</b>

## STORAGE TANK ACCESSORIES

**NEW**


Reducer bushing fits tanks without HX for installing temperature probe.  
Low lead brass  
1 5/8" hex head.

Code	Description	Lbs	USD
<b>NA10234</b>	2" NPT male x ¾" NPT female	0.4	<b>49.80</b>

**NEW**


Male plug 1 1/4" square head.

Code	Description	Lbs	USD
<b>NA10339</b>	2" NPT male plug, stainless steel	0.2	<b>43.40</b>



Brass reducing bushing. 1 1/8" hex head.

Code	Description	Lbs	USD
<b>NA10082</b>	¾" NPT male x ½" NPT female	0.3	<b>8.00</b>

Magnesium anode rod.



Code	Description	Lbs	USD
<b>NA10229</b>	¾" NPT x 36" anode rod fits 50 gal.	8.0	<b>64.10</b>
<b>NA10230</b>	¾" NPT x 40" anode fits 80 & 120 gal.	9.0	<b>71.40</b>



90° brass elbow to connect ¾" SolarFlex™ to heat exchanger in SolarCon tank.

Code	Description	Lbs	USD
<b>NA10093</b>	1" NPT female x 1" male	0.5	<b>64.60</b>



Insulated 6' SolarFlex™ for connecting solar pump station to SolarCon™ HX.

Code	Description	Lbs	USD
<b>NAS3140-02</b>	¾" SolarFlex with 1" union nuts	1	<b>194.30</b>

## EXPANSION TANK


**259**
 tech. broch. 01136

Solar system expansion tanks with 3/4" straight thread.  
System temp. range: 15—250°F.  
Maximum diaphragm temp : 160°F.  
Maximum working pressure: 150 psi.  
Pre-charge pressure: 35 psi.  
Maximum percentage of glycol: 50%.

Code	Description	Lbs	USD
<b>259012</b>	3 gallon, 3/4" male straight thread	14	<b>171.90</b>
<b>259018</b>	5 gallon, 3/4" male straight thread	17	<b>213.50</b>
<b>259025</b>	7 gallon, 3/4" male straight thread	21	<b>276.40</b>
<b>259033</b>	9 gallon, 3/4" male straight thread	24	<b>471.90</b>
<b>259050</b>	13 gallon, 3/4" male straight thread	28	<b>595.00</b>

## ACCESSORIES


**255**
 tech. broch. 01136

Expansion tank connection kit.  
Includes 3/4" connection, wall bracket,  
hardware and double check valve.

Code	Description	Lbs	USD
<b>255007</b>	S.S. flexible tank connection kit	3.0	<b>200.00</b>



Expansion tank fitting connections. 3/4"  
union nut connects to the expansion tank.

Code	Description	Lbs	USD
<b>NA25540</b>	1/2" NPT union connection set	0.1	<b>20.00</b>
<b>NA25549</b>	1/2" sweat union connection set	0.1	<b>18.80</b>



Cap for plugging tank connection  
on pump station while leak testing.  
Requires (R50058) washer.

Code	Description	Lbs	USD
<b>R21180</b>	3/4" female cap	0.1	<b>6.30</b>

## ACCESSORIES


**NA255**

6' flexible stainless steel extension for connecting expansion tank to pumping station.

Code	Description	Lbs	USD
<b>NA255002</b>	3/4" union nuts	1	<b>110.30</b>


**NA267**

Kit for mounting solar pumping station onto storage tank and connecting expansion tank to pumping station. Includes bracket, hardware and 6' extension for expansion tank.

Code	Description	Lbs	USD
<b>NA267002</b>	3/4" union nuts	2	<b>131.30</b>


**NA267**

Kit for mounting solar pumping station onto storage tank. Includes bracket and hardware.

Code	Description	Lbs	USD
<b>NA267003</b>	Kit to mount solar station	2	<b>24.20</b>


**255**

Hand pump attaches to solar pump station for pressurizing system.

Code	Description	Lbs	USD
<b>255010A</b>	Manual hand pump	3.0	<b>336.00</b>


**NA256**

Two solar station connection kits.

Code	Description	Lbs	USD
<b>NA256012</b>	3/4" F x 3/4" M thread and cap	1.0	<b>315.00</b>

## SOLAR PUMP STATIONS

### 255 & 256 tech. broch. 01136



Solar pump stations are pre-assembled and leak-tested. Safety relief valve. Ball valves with built-in flow checks in return (and flow for dual-line models). Temperature gauges in return (and flow for dual-line models). Pressure gauge. Manual air vent (dual-line models only). Expansion tank connection. Connections for flushing and filling. Foam insulation. Balance/flow meter: 1/2—5 gpm scale. Pump: three speed. Pump performance: 13-15 ft head/5 gpm. Safety relief valve: 90 psi. Max. working pressure: 150 psi. Max. working temp: 360°F. Connections: 3/4" female thread. Agency approval: cULus.



(Select adaptors to the right)

Code	Description	Lbs	USD
<b>255050A</b>	Dual-line solar pump station	17	<b>1,313.00</b>
<b>255056A</b>	Dual-line solar station w/o pump	12	<b>1,050.00</b>
<b>256050A</b>	Single-line solar pump station	14	<b>1,145.00</b>
<b>256056A</b>	Single-line solar station w/o pump	10	<b>882.00</b>



Optional pumps fits solar pump stations 255 & 256. 3 speed 120 V, 1" male union thread.

Code	Description	Lbs	USD
<b>NA12170</b>	Wilco Star S-16, 13' head / 5 gpm	5.0	<b>340.00</b>
<b>NA12168</b>	Wilco Star S-21, 19' head / 5 gpm	5.0	<b>340.00</b>
<b>NA12175</b>	Grundfos 15-68, 15' head / 5 gpm	5.0	<b>340.00</b>



Temperature gauges fits 255 & 256 solar stations.

Code	Description	Lbs	USD
<b>NA255003</b>	1 1/2" red dial temp. gauge	0.1	<b>50.50</b>
<b>NA255004</b>	1 1/2" blue dial temp. gauge	0.1	<b>50.50</b>

## PUMP STATION FITTINGS



1/2" SolarFlex™ directly to top or bottom.  
2 each.

Code	Description	Lbs	USD
<b>NA26640</b>	3/4" male thread x 3/4" male thread	0.6	<b>58.40</b>



1/2" SolarFlex™ directly to top and bottom.  
4 each.

Code	Description	Lbs	USD
<b>NA26740</b>	3/4" male thread x 3/4" male thread	1.0	<b>116.80</b>



3/4" SolarFlex™ directly to top or bottom.  
2 each.

Code	Description	Lbs	USD
<b>NA26650</b>	3/4" male thread x 1" male thread	0.6	<b>63.20</b>



3/4" SolarFlex™ directly to top and bottom.  
4 each.

Code	Description	Lbs	USD
<b>NA26750</b>	3/4" male thread x 1" male thread	1.0	<b>126.40</b>



1" SolarFlex™ directly to top or bottom.  
2 each.

Code	Description	Lbs	USD
<b>NA26660</b>	3/4" male thread x 1 1/4" male thread	0.6	<b>122.40</b>



1" SolarFlex™ directly to top and bottom.  
4 each.

Code	Description	Lbs	USD
<b>NA26760</b>	3/4" male thread x 1 1/4" male thread	1.0	<b>244.90</b>



## PUMP STATION FITTINGS



1/2" sweat fittings to top or bottom.  
2 each.

Code	Description	Lbs	USD
NA26649	3/4" male thread x 1/2" sweat fitting	0.6	96.00



1/2" sweat fittings to top and bottom. 4 each.

Code	Description	Lbs	USD
NA26749	3/4" male thread x 1/2" sweat fitting	1.0	191.90



3/4" sweat fittings to top or bottom.  
2 each.

Code	Description	Lbs	USD
NA26659	3/4" male thread x 3/4" sweat fitting	0.6	107.70



3/4" sweat fittings to top and bottom. 4 each.

Code	Description	Lbs	USD
NA26759	3/4" male thread x 3/4" sweat fitting	1.0	215.50



1" sweat fittings to top or bottom.  
2 each.

Code	Description	Lbs	USD
NA26669	3/4" male thread x 1" sweat fitting	0.6	117.80



1" sweat fittings to top and bottom. 4 each.

Code	Description	Lbs	USD
NA26769	3/4" male thread x 1" sweat fitting	1.0	235.60

## DRAINBACK PUMP STATION

256



Drainback solar pump stations designed with a high head and steep pump curve which are pre-assembled and leak-tested. Safety relief valve, ball valve, temperature gauge, pressure gauge, air fill valve. Connections for flushing and filling with foam insulation.  
Balance/flow meter: 1/2—5 gpm scale.  
Pump: Grundfos UP15-100  
Performance: 36 feet head / 8 gpm.  
Safety relief valve: 90 psi.  
Max. working pressure: 150 psi.  
Max. working temp: 360°F.  
Connections: 3/4" female thread.  
Agency approval: cULus.

(Select adaptors to the left)

Code	Description	Lbs	USD
256059A	Drainback solar pump station	14	1,223.00



NA121

Replacement single speed 120 V, 1" male union thread with 36 feet head / 8 gpm.

(Select union fitting on page 83)

Code	Description	Lbs	USD
NA12171	Grundfos UP 15-100	6.0	420.00

## DC SOLAR PUMP

NA267



8 to 34 VDC, DC Strong solar pump for mounting in solar stations.  
15 feet head / 7 gpm at 24 VDC.  
8 feet head / 4 gpm at 12 VDC.  
Power consumption: 30—45 W.  
Max. working pressure: 150 psi.  
Max. temperature: -10—230°F.



Shown mounted in 255056A or can be mounted inside 256056A.



(Select union fitting on page 86)

Code	Description	Lbs	USD
NA26711	1" male union thread	3.0	685.00

## DIVERTING VALVE KIT

### NA267

Diverting three-way valve for solar pump station mounting kit. Used for diverting solar fluid to another storage tank, swimming pool heat exchanger or heat dissipating device. (Select fittings below)

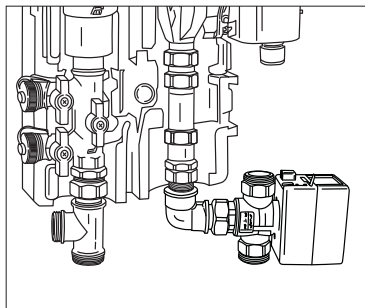

Kit Contents

Code	Description	Quantity
Z126000	Actuator 120 VAC	1
Z300687	Three-way valve with 1" male union threads	1
NAL6363	Elbow with 1" union threads	1
NAT636262	Tee with 1" union threads	1
NA10092	Power cord	1

Code	Description	Lbs	USD
<b>NA26710</b>	Diverting three-way valve kit	6.0	<b>336.00</b>

Select two fitting sets below, mix and match sets for a total of four union fittings.



### NA122

Two union nuts, washers and tail pieces. Union connection set fits 1" male threads.

Code	Description	Lbs	USD
<b>NA12240</b>	½" NPT with 1" union nuts	0.2	<b>42.80</b>
<b>NA12249</b>	½" sweat with 1" union nuts	0.2	<b>40.50</b>



Two union nuts, washers and tail pieces. Union connection set fits 1" male threads.

Code	Description	Lbs	USD
<b>NA12250</b>	¾" NPT with 1" union nuts	0.2	<b>46.80</b>
<b>NA12259</b>	¾" sweat with 1" union nuts	0.2	<b>44.50</b>



Two union nuts, washers and tail pieces. Union connection set fits 1" male threads.

Code	Description	Lbs	USD
<b>NA12260</b>	1" NPT with 1" union nuts	0.3	<b>56.90</b>
<b>NA12269</b>	1" sweat with 1" union nuts	0.3	<b>54.60</b>

## IN-LINE CHECK VALVE

### NA510

In-line union sweat solar flow check valve.  
Open pressure: 0.29 psi.  
Max percentage of glycol: 50%.  
Max working pressure: 150 psi.  
Temperature range: 32 – 250°F.  
Open pressure: 0.29 psi



Code	Description	Cv	Lbs	USD
<b>NA51059</b>	¾" sweat union	12	0.7	<b>74.40</b>

### NA510

In-line union sweat solar flow check valve.  
Open pressure: 0.29 psi.  
Max percentage of glycol: 50%.  
Max working pressure: 150 psi.  
Temperature range: 32 – 250°F.  
Open pressure: 0.29 psi



Code	Description	Cv	Lbs	USD
<b>NA51069</b>	1" sweat union	17	1.0	<b>95.00</b>

## FLOW METER

### NA255

Direct in-line flow meter with brass body.  
Max percentage of glycol: 50%.  
Max working pressure: 150 psi.  
Temperature range: 32 – 250°F.  
Measuring accuracy: ±10%.  
Cv: 10.



(Select fitting to the left)

Code	Description	Pk	Lbs	USD
<b>NA255112</b>	1 to 10 gpm with 1" union thread	1	2.9	<b>158.00</b>

## FILL & FLUSH VALVE

### NA256

Dual fill and flush valve.

(Select fitting to the left)



Code	Description	Pk	Lbs	USD
<b>NA256011</b>	1" male union thread x ¾" GHT	1	0.8	<b>210.00</b>



## COMMERCIAL SOLAR PUMP STATION

### NA255



The Solar pump station is pre-assembled and leak-tested unit without fittings for transferring heat from the collector to the storage tank. The pump station contains the following:

- Ball valves in flow and return in combination with flow check valves.
- Foam insulation shell.
- Ports for filling and flushing.
- Manual air vents.
- Balance/flow meter.
- Temperature gauges in flow and return.
- Pressure gauge.
- Safety relief valve: 90 psi.
- Pump: Star S 30 U25 three-speed.
- Connection: 1" male straight thread.
- Max. working pressure: 150 psi.
- Max. working temp: 360°F.
- Adjustable flow: ½ to 10 gpm.
- Agency approval: cULus.

(Select fittings to the right)

Code	Description	Lbs	USD
<b>NA255160</b>	1" male union thread	25	<b>2,180.00</b>



Replacement pump fits solar pump station NA255. 120 VAC / 1.3 A. 30 feet head / 30 gpm. 1 ½" male thread.

Code	Description	Lbs	USD
<b>NA12169</b>	Wilo Star S 30	6.0	<b>540.00</b>



Replacement solar pump station pressure gauge.  
Pressure range: 0—90 psi.  
Dial size: 1 ½"

Code	Description	Lbs	USD
<b>NA12156</b>	¼" male rear connection thread	0.1	<b>48.80</b>

## PUMP STATION FITTINGS

### NA155

NA255160 Solar pump stations fitting kits.  
(mix & match for top & bottom)



Code	Description	Lbs	USD
<b>NA15550</b>	¾" NPT male union kit	1.0	<b>173.70</b>



NA255160 Solar pump stations fitting kits.  
(mix & match for top & bottom)

Code	Description	Lbs	USD
<b>NA15559</b>	¾" sweat union kit	1.0	<b>140.90</b>



NA255160 Solar pump stations fitting kits.  
(mix & match for top & bottom)

Code	Description	Lbs	USD
<b>NA15560</b>	1" NPT male union kit	1.1	<b>173.70</b>



NA255160 Solar pump stations fitting kits.  
(mix & match for top & bottom)

Code	Description	Lbs	USD
<b>NA15569</b>	1" sweat union kit	1.1	<b>143.00</b>



NA255160 Solar pump stations fitting kits.  
(mix & match for top & bottom)

Code	Description	Lbs	USD
<b>NA15570</b>	1¼" male, 1" SolarFlex™	0.9	<b>59.20</b>

## SOLAR GLYCOL



### NA101 SolarHD™

Pre-mixed 50% high temperature non toxic glycol, FDA reference: 21 CFR 182.1666, Gosselin TOXICITY INDEX 1, Generally recognized as safe for use as direct food additives. NSF listed, Category Code: HT1, HT2, NSF Registration No. 144912. Compatible with other propylene glycols.



Code	Description	Lbs	USD
<b>NA10103</b>	5 gallon bucket	45.0	<b>252.80</b>

## FILL AND FLUSH CART



### NA255 tech. broch. 01280 Fill and Flush Cart

The fill and flush pump cart is portable, pre-assembled and leak-tested for a safe, quick and clean way to fill and flush solar and hydronic heating systems.  
Medium: water, glycol and cleaning fluids.  
Tank: 13 gallon with dirt filter.  
Max. tank medium temperature: 150°F.  
Pump delivery flow: 1—13 gpm  
Pump feet of head: 220  
Max. pump pressure: 100 psi.  
Pump power: ½ HP (120 V AC).  
Isolating ball valves: ¾" garden hose thread.  
Transfer hoses: 6' with ¾" GHT (2 ea).  
Pressure gauge: 2" dial, 0—100 psi.  
Dimensions: 48"H x 20"W x 18"D.

Code	Description	Lbs	USD
<b>NA25510</b>	Fill and flush cart	60	<b>2,520.00</b>

## AUTOMATIC AIR VENT



### 250 tech. broch. 01133

Automatic air vent for solar systems.  
Working temperature range: -20—360°F.  
Max. working pressure: 150 psi.  
Max. discharge pressure: 75 psi.

Code	Description	Lbs	USD
<b>250041A</b>	½" NPT male	0.3	<b>78.80</b>



### NA292 tech. broch. 01133

Shut-off fits automatic air vent.  
Working temperature range: -20—360°F.  
Max. working pressure: 150 psi.

Code	Description	Lbs	USD
<b>NA29284</b>	½" NPT female x ½" NPT male	0.2	<b>64.10</b>

### NA102

Vent cap adapter to connect discharge tube. Fits all air vents and air separators except 5026 and 5027 series.



Code	Description	Lbs	USD
<b>NA10204</b>	¼" NPT male	0.1	<b>27.30</b>

### 251 tech. broch. 01135 DISCALAIR®

High-performance automatic air vent for solar heating systems.  
Working temperature range: -20—320°F.  
Max. working pressure: 150 psi.  
Max. discharge pressure: 150 psi.



Code	Description	Lbs	USD
<b>251004A</b>	½" NPT female	0.8	<b>157.30</b>

## AIR SEPARATOR



### 251 DISCAL™

tech. broch. 01134

Air separator for solar heating systems.  
Working temperature range: -20—320°F.  
Max. working pressure: 150 psi.  
Max. discharge pressure: 150 psi.  
Connections: Main, ¾" NPT, female  
Bottom, ½" NPT, female

Code	Description	Lbs	USD
<b>251003A</b>	¾" NPT female	2.0	<b>208.80</b>



### 253

tech. broch. 01089

Safety relief valves for solar systems.  
Working temperature range: -20—360°F.  
Normal pressure: 150 psi.  
Opening over pressure: 10%.  
Closing differential: 20%.  
Discharge capacity: 171,000 Btu.  
Connections: Inlet, ½" female.  
Discharge, ¾" female.  
Approval: according to TÜV SV 07 2009.  
Rating: TÜV • SOL • 50 • p / ANSI Z21.22.



TÜV Rheinland is an approved U.S. Nationally  
Recognized Testing Laboratory (NRTL) Certification  
Body for Pressure Equipment. Meets ANSI Z21.22  
"Relief Valves for Hot Water Supply Systems."

Code	Description	Lbs	USD
<b>253042</b>	Factory set to 35 psi	0.3	<b>78.50</b>
<b>253043</b>	Factory set to 45 psi	0.3	<b>78.50</b>
<b>253044</b>	Factory set to 60 psi	0.3	<b>78.50</b>
<b>253046</b>	Factory set to 90 psi	0.3	<b>78.50</b>
<b>253048</b>	Factory set to 120 psi	0.3	<b>78.50</b>
<b>253040</b>	Factory set to 150 psi	0.3	<b>78.50</b>

## LOW LEAD MIXING VALVES



### 2521

tech. broch. 01127

Adjustable thermostatic three-way mixing  
valve for solar systems with built-in inlet  
check valves.  
Setting range: 80—150°F.  
Max. working pressure: 200 psi.  
Max. inlet temperature: 210°F.  
Connection: ½", ¾", 1" sweat.  
Certified to: cUPC listed to ASSE 1017/  
CSA B125.3  
Reduction of Lead in Drinking Water Act  
Compliant: 0.25% Max. weighted average  
lead content. Reduction of Lead in Drinking  
Water Act Certified by IAPMO R&T



Code	Description	Lbs	USD
<b>252149A</b>	½" sweat with inlet check valves	1.2	<b>252.90</b>
<b>252159A</b>	¾" sweat with inlet check valves	1.2	<b>266.50</b>
<b>252169A</b>	1" sweat with inlet check valves	1.2	<b>308.70</b>



### 2521

tech. broch. 01127

Adjustable thermostatic three-way mixing  
valve with temperature gauge for solar  
systems with built-in inlet check valves.  
Setting range: 80—150°F.  
Max. working pressure: 200 psi.  
Max. inlet temperature: 210°F.  
Connection: ¾", 1" sweat.  
Certified to: cUPC listed to ASSE 1017/  
CSA B125.3  
Reduction of Lead in Drinking Water Act  
Compliant: 0.25% Max. weighted average  
lead content. Reduction of Lead in Drinking  
Water Act Certified by IAPMO R&T



Code	Description	Lbs	USD
<b>252158A</b>	¾" sweat with inlet check valves	1.2	<b>327.40</b>
<b>252168A</b>	1" sweat with inlet check valves	1.2	<b>372.50</b>



Check valve for use in 2521 mixing valve.  
Max. inlet temperature: 210°F.

Code	Description	Lbs	USD
<b>R29326</b>	Check valve insert	0.1	<b>9.35</b>

## STAINLESS STEEL PIPING

### NA35 SolarFlex™

tech. broch. 01172



SolarFlex™ stainless steel piping with EPDM insulation. Used to connect solar collector with storage tank. Integrated sensor cable saves time and reduces cost. Packaged in a 50 foot continuous coil ensures a leak-free installation. Max. working pressure: 150 psi. Max. fluid temperature: 350°F. Min. surface temperature: -60°F. Min. bend radius: 5". Flammability: Class VO. Flame spread/smoke density: 25/50. Agency approvals: ASTM D 635 ASTM C 177

Includes fitting kit.



Code	Description	Lbs	USD
NA3520-15	1/2" Pipe, 50' coil	24	<b>1,575.00</b>
NA3540-15	3/4" Pipe, 50' coil	27	<b>1,785.00</b>
NA3560-15	1" Pipe, 50' coil	40	<b>2,415.00</b>
NA3540-B*	3/4" Pipe, 165' spool (order per ft)	0.5	<b>30.00</b>

\* NAS3540-B is cut lengths (up to 165' per spool) price per foot (minimum 10' length), without fitting kit, order NA12103 below.

### NA121

tech. broch. 01172

SolarFlex™ extra connection kits.



Code	Description	Lbs	USD
NA12102	1/2" SolarFlex™, 3/4" nuts and washers	1.0	<b>39.90</b>
NA12103	3/4" SolarFlex, 1" nuts and washers	1.1	<b>53.80</b>
NA12104	1" SolarFlex, 1 1/4" nuts and washers	1.3	<b>86.10</b>

### NA121

tech. broch. 01172

SolarFlex™ pipe hangers with hardware. (4 per pack)



Code	Description	Lbs	USD
NA12132	1/2" SolarFlex™ hangers	1.2	<b>48.20</b>
NA12133	3/4" SolarFlex™ hangers	1.3	<b>50.70</b>
NA12134	1" SolarFlex™ hangers	1.0	<b>57.10</b>

### NA350

tech. broch. 01172

EPDM foam UV resistant insulating tape to wrap fitting connections.



Code	Description	Lbs	USD
NA35001	2" x 1/8" x 25' roll	1.3	<b>93.10</b>

Black film UV resistant film tape to wrap foam tape.



Code	Description	Lbs	USD
NA35002	2" x 30' roll	0.5	<b>19.80</b>

4' lengths black braid sleeve (UV & vermin resistant) (2) to protect outdoors piping with black film tape.



Code	Description	Lbs	USD
NA35007	4' Sleeve with 2" x 30' film tape	1.0	<b>78.90</b>

### NA350

tech. broch. 01172

SolarFlex™ sliding piston flattening tool. Three sizes of jaws to match SolarFlex™ pipe sizes.



Code	Description	Lbs	USD
NA35003	Sliding piston tool	5.0	<b>315.00</b>
NA35004	1/2" Fixed jaw	3.0	<b>593.00</b>
NA35005	3/4" Fixed jaw	3.0	<b>593.00</b>
NA35006	1" Fixed jaw	3.0	<b>593.00</b>

## 1/2" FLEX FITTINGS WITH 3/4" THREADS



Double nipple.

Code	Description	Lbs	USD
<b>NA12122</b>	3/4" male x 3/4" male	0.3	<b>27.30</b>



Double nipple.

Code	Description	Lbs	USD
<b>NA12172</b>	3/4" NPT x 3/4" NPT	0.3	<b>27.30</b>



Union nut.

Code	Description	Lbs	USD
<b>R41298/C</b>	3/4" union nut	0.1	<b>4.60</b>



C-clip.  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>NA12112</b>	1/2" flex "C" clip	0.1	<b>3.70</b>



Union washer  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>R50058</b>	3/4" union washer	0.1	<b>1.80</b>



Sweat tail piece.

Code	Description	Lbs	USD
<b>NA10001</b>	1/2" sweat fits 3/4" union nut	0.3	<b>12.50</b>



Sweat adapter.

Code	Description	Lbs	USD
<b>NA10118</b>	3/4" sweat x 3/4" male thread	0.3	<b>27.30</b>



Double nipple with O-ring.

Code	Description	Lbs	USD
<b>NA12152</b>	3/4" male w/ O-ring x 3/4" male thread	0.3	<b>29.20</b>



NPT tail piece.

Code	Description	Lbs	USD
<b>F31868</b>	1/2" NPT fits 3/4" union nut	0.1	<b>15.10</b>



Compression adaptor.

Code	Description	Lbs	USD
<b>254452</b>	22mm comp. w/ 3/4" male thread	0.2	<b>31.80</b>



Compression elbow adaptor.

Code	Description	Lbs	USD
<b>254752</b>	22mm comp. elbow w/ 3/4" male thd.	0.2	<b>36.30</b>

## 3/4" FLEX FITTINGS WITH 1" THREADS



Double nipple.

Code	Description	Lbs	USD
<b>NA12123</b>	1" x 1" male thread	0.4	<b>34.10</b>



Double nipple.

Code	Description	Lbs	USD
<b>NA12173</b>	1" NPT x 1" NPT	0.4	<b>34.10</b>



Union nut. Low-lead brass.

Code	Description	Lbs	USD
<b>F61008</b>	1" brass nut	0.2	<b>5.70</b>
<b>F61008/C</b>	1" chrome-plated nut	0.2	<b>6.80</b>



C-clip.  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>NA12113</b>	3/4" flex "C" clip	0.1	<b>5.70</b>



Union washer.  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>F50055</b>	1" union washer	0.1	<b>2.10</b>

## 3/4" FLEX FITTINGS WITH 1" THREADS



Union washer.  
High temperature silicone rubber.  
Working temperature: -40—350°F.  
(Priced each, sold in package of 10 each)

Code	Description	Lbs	USD
<b>NA10302</b>	1" union washer high temp silicone	0.1	<b>3.20</b>



Sweat adaptor.

Code	Description	Lbs	USD
<b>NA10062</b>	1" sweat adaptor w/ 1" male thd.	0.2	<b>29.50</b>



Sweat tail piece.  
Low lead brass.

Code	Description	Lbs	USD
<b>NA10002</b>	1/2" sweat fits 1" union nut	0.3	<b>12.50</b>



Nipple adaptor.

Code	Description	Lbs	USD
<b>NA10064</b>	1" NPT w/ 1" male thread	0.2	<b>30.70</b>



Sweat tail piece.  
Low lead brass.

Code	Description	Lbs	USD
<b>NA10003</b>	3/4" sweat fits 1" union nut	0.4	<b>14.50</b>



Nipple adaptor with O-ring.

Code	Description	Lbs	USD
<b>NA12162</b>	3/4" male w/ O -ring x 1" male thread	0.2	<b>31.60</b>



NPT tail piece.  
Low lead brass.

Code	Description	Lbs	USD
<b>31901A</b>	3/4" NPT fits 1" union nut	0.4	<b>15.60</b>



Bushing.

Code	Description	Lbs	USD
<b>NA10089</b>	3/4" female thread x 1" male thread	0.1	<b>22.70</b>



Sweat tail piece with nut.  
Low lead brass.

Code	Description	Lbs	USD
<b>59834A</b>	1" sweat w/ 1" union nut	0.5	<b>25.20</b>



Smooth pipe adaptor.

Code	Description	Lbs	USD
<b>NA10085</b>	22mm pipe w/ 1" male thread	0.2	<b>26.10</b>



Bushing adaptor.

Code	Description	Lbs	USD
<b>NA10060</b>	3/4" NPT female w/ 1" male thread	0.3	<b>27.30</b>



Compression elbow adaptor.

Code	Description	Lbs	USD
<b>NA254712</b>	22mm comp. elbow w/ 1" male thd.	0.4	<b>43.20</b>



Sweat adaptor.

Code	Description	Lbs	USD
<b>NA10061</b>	3/4" sweat adaptor w/ 1" male thd.	0.2	<b>28.50</b>



## 1" FLEX FITTINGS WITH 1¼" THREADS



Double nipple.

Code	Description	Lbs	USD
<b>NA12124</b>	1¼" x 1¼" thread	0.4	<b>54.60</b>



Sweat tail piece.

Code	Description	Lbs	USD
<b>NA10042</b>	1" sweat fits 1¼" union nut	0.3	<b>29.50</b>



Union nut.

Code	Description	Lbs	USD
<b>R31495</b>	1¼" union nut	0.2	<b>9.10</b>



NPT tail piece.

Code	Description	Lbs	USD
<b>NA10116</b>	1" NPT male fits 1¼" union nut	0.3	<b>44.80</b>



C-clip.  
(Priced each, sold in package of 5 each)

Code	Description	Lbs	USD
<b>NA12114</b>	1" flex "C" clip	0.1	<b>9.10</b>



Sweat adaptor.

Code	Description	Lbs	USD
<b>NA10119</b>	1" sweat adapter x 1¼" union thread	0.4	<b>37.50</b>



Union washer.  
(Priced each, sold in package of 5 each)

Code	Description	Lbs	USD
<b>R50056</b>	1 ¼" union washer	0.1	<b>3.30</b>



Bushing.

Code	Description	Lbs	USD
<b>NA10087</b>	1" female x 1 ¼" male bushing	0.4	<b>27.50</b>



Gasket- black.

Code	Description	Lbs	USD
<b>R67032</b>	1-1/4" high temp silicon	0.1	<b>2.80</b>



Bushing.

Code	Description	Lbs	USD
<b>61215A</b>	1" NPT female x 1¼" male bushing	0.8	<b>27.30</b>



Sweat tail piece.

Code	Description	Lbs	USD
<b>31390 FD</b>	¾" sweat fits 1¼" union nut	0.2	<b>28.90</b>



Nipple adaptor.

Code	Description	Lbs	USD
<b>R31706</b>	1" male x 1¼" male nipple	0.3	<b>34.10</b>

## DIFFERENTIAL TEMPERATURE CONTROLLERS



Code	Description	Lbs	USD
<b>257220A</b>	<i>iSolar™</i> 2, 1 relay	2.0	<b>500.00</b>
<b>257260A</b>	<i>iSolar™</i> Plus, 2 relays	2.0	<b>760.00</b>
<b>257260A PV1</b>	<i>iSolar™</i> Plus, 2 relays, 12 V DC	2.0	<b>760.00</b>
<b>257260A PV2</b>	<i>iSolar™</i> Plus, 2 relays, 24 V DC	2.0	<b>760.00</b>

Model Comparison	<i>iSolar</i> 2	<i>iSolar</i> Plus	<i>iSolar</i> BX	<i>iSolar</i> MX-LTE
Pre configured arrangements	1	10	26	20
Speed control triac output (30–100%)	1	2	3	4
Standard relay output	0	0	1	0
Dry contact relay	0	0	0	1
Sensor inputs (temperature)	4	4	5	8
Pt-1000 temp. sensors included	3	4	4	5
Max. solar collector arrays	1	2	2	2
Max. solar storage tanks	1	2	2	4
Two tank priority logic		•	•	•
Second delta T-function		•	•	•
Drain-back pump speed control	•	•	•	•
Drain-back booster pump		•	•	•
Time controlled thermostat function		•	•	•
Backup heat function		•	•	•
Heat dump function		•	•	•
Real time clock (timer function)		•	•	•
Collector freeze protection	•	•	•	•
Evacuated tube collector function		•	•	•
Min. collector temperature	•	•	•	•
Collector cooling functions	•	•	•	•
Tank (night time) cooling	•	•	•	•
Emergency shutdown functions	•	•	•	•
Pump operating hours counter	•	•	•	•
Energy metering - flow calculated	•			
Energy metering - flow meter input		•	•	•
Vbus data communication	•	•	•	•
Onboard data logging			•	•

### 257 *iSolar™*

tech. broch. 01174

The *iSolar™* 257 series are multi-functional temperature differential controllers that provide complete control of the solar thermal system.

Inputs: (4) Pt1000 temperature sensors

Triac relays capacities: 1A / 100–240 V AC.

Standard relay capacity: 1A / 100–240 V AC.

Power supply: 100–240 V AC- 50/60 Hz.

Power supply: PV1 -12 V DC, PV2 - 24V DC

Data interface: V-Bus.

ΔT adjustment range: 2–40°F Δ.

Min. temperature differential 2°F Δ.

Hysteresis: 2°FΔ, ± 1°FΔ.

Max. tank temperature range: 35–205°F.

Max. collector temperature range: 210–375°F.

Emergency shut down of the collector: 230–395°F.

Min. collector temperature range: 50–195°F.

Antifreeze temperature option: 15–50°F.


kWh (BTU) calculation flow input: 0–5 gpm.

#### Function

The *iSolar™* series are multi—functional temperature differential controllers that provide complete control of the solar thermal system for safe and long-lasting operation. The microprocessor based controller monitors and controls thermal solar systems by means of a collector sensor and a storage tank sensor. The controllers also perform important system monitoring and safety functions. The system parameters and measured values can be changed and viewed on the large LCD display. The controller is equipped for up to four temperature sensor inputs and one or two 120 VAC outputs (some models) for activating the solar circuit pump and second 120 VAC output for activating a valve or second pump. The controller is additionally equipped with VBus® for two-way communication between modules, PC's or data loggers.

#### Note:

Do not directly connect *iSolar™* Plus PV1, 12 volt or *iSolar™* Plus PV2, 24 volt, to DC solar photovoltaic panel or any other power source that exceeds 15% over voltage. If the power supply voltage is 15% greater than the rated input voltage of the controller, it can lead to damage or destruction of the product.

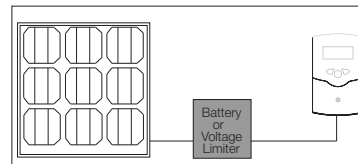

Replacement fuse T4A.  
(priced per package of 10).

Code	Description	Lbs	USD
<b>257208</b>	Fuses	0.1	<b>31.50</b>

### NA101



Steel electrical mounting box with cover for *iSolar™* controllers.  
UL listed



Code	Description	Lbs	USD
<b>NA10120</b>	1 5/8" D x 8 5/8" H x 4 1/2" W	3.0	<b>73.50</b>

## VBUS DATA INTERFACE

### SD3



Smart display SD3 connected to VBus data interface is used for displaying data from *iSolar*™ controller; collector temperature, storage temperature and total energy heat produced. An additional power supply is not required. Bright LED displays. Power supply: via VBus. Mounting: wall.

Code	Description	Lbs	USD
<b>NA15008</b>	Smart display	2.0	<b>685.00</b>

### SP10



The lightning protector SP10 device is used to protect the collector temperature sensor and controller against external over-voltages such as those caused by lightning strikes.

Code	Description	Lbs	USD
<b>NA15006</b>	Lightning protector	0.2	<b>73.50</b>

### WALL



Wall transformer.  
Input voltage: 120 V AC  
Output voltage: 24 V AC.  
Power output: 40 VA.  
Agency approval: cULus

Code	Description	Lbs	USD
<b>NA605010</b>	24 V AC wall transformer	1.0	<b>46.60</b>

### USB



USB to VBus data interface to connect *iSolar*™ controller to PC for transmission of system data for processing, visualizing and archiving. Full version of Service Center software included on CD-ROM. USB 2.0 full speed with mini-USB port and cable. Power supply: via VBus.

Code	Description	Lbs	USD
<b>NA15020</b>	USB to VBus data interface	0.3	<b>241.00</b>

### PWM



PWM or 0—10 V DC to VBus data interface is used for speed control of a pump. Information from the *iSolar*™ controller is converted into a PWM or 0—10 V DC output control signal which is connected to input control signal of a pump. Display: LED display. Wall power: 100-240 V AC / 50-60 Hz. Adapter input voltage: 12 V DC.

Code	Description	Lbs	USD
<b>NA15021</b>	PWM or 0—10 V DC to VBus interface	0.3	<b>273.00</b>

### LAN



LAN socket to VBus data interface to connect controller to PC network or router for transmission of system data for processing, visualizing and archiving over a local network. Full version of Service Center software included. Wall power: 100-240 V AC / 50-60 Hz. Adapter input voltage: 12 V DC.

Code	Description	Lbs	USD
<b>NA15022</b>	LAN socket to VBus data interface	0.3	<b>315.00</b>

## DIFFERENTIAL TEMPERATURE CONTROLLERS



### Function

The iSolar™ BX is a multi-functional temperature differential controller with add-on system functions for use in a wide variety of solar thermal heating applications. iSolar™ BX is equipped with four relay outputs; three triac pump speed control relays and one standard relay. The controller is equipped with five Pt1000 sensor inputs, two analog Grundfos sensor inputs, and one impulse flow meter input. Twenty six system configuration options are predefined for control of a standard solar water heating system, drainback systems, supplemental space heating, multiple storage tanks, heat dump and storage tank booster heating. Unique features include built-in SD memory card slot, built-in clock and calendar, integrated energy heat measurement inputs, parallel relay operation and drain back control.



### NA150

Cable for connecting Grundfos VFS & RPS with molded plug to BX controller with molded plug.

Code	Description	Lbs	USD
NA15028	VFS & RPS molded plug cable, 10'	0.2	26.30



### NA150

Steel electrical mounting box with cover fits iSolar™ BX controller.



Code	Description	Lbs	USD
NA15027	Electrical box	5.0	84.00

## 257

### iSolar™ BX

tech. broch. 01273

Inputs: (5) Pt1000 temperature sensors, 2 analog Grundfos Direct Sensors™, impulse flow meter  
Outputs: (3) triac and (1) standard relays.  
Triac relays capacities: 1A / 115 V.  
Standard relay capacity: 2A / 115 V.  
Power supply: 100—240 V - 50/60 Hz.  
Data interface: V-Bus, SD card slot  
 $\Delta T$  adjustment range: 2—40°F $\Delta$ .  
Min. temperature differential 2°F $\Delta$ .  
Hysteresis: 2°F $\Delta$ ,  $\pm 1^\circ\text{F}\Delta$ .  
Max. tank temperature range: 35—205°F.  
Max. collector temperature range: 210—375°F.  
Emergency shut down of the collector: 230—395°F.  
Min. collector temperature range: 50—195°F.  
Antifreeze temperature option: 15—50°F.  
kWh (BTU) flow input: 0—26 gpm.



Tested and Approved by TÜV Rheinland as an approved U.S. Nationally Recognized Testing Laboratory (NRTL)  
Exceeds or is equivalent to:  
UL 60730-1A  
CAN/CSA E60730-1

Code	Description	Lbs	USD
257270A	iSolar™ BX	3.0	1,025.00

### NA100




18" SJ round cord, stripped and pre-tinned for connecting pump or valve to iSolar controller.

Code	Description	Lbs	USD
NA10092	18" SJ round cord	0.3	9.50



### NA150

SSRs (Solid State Relays) is an isolation speed control relay which will speed control up to a 5 Amp solar pump based on the output speed control voltage of the iSolar solar controllers.

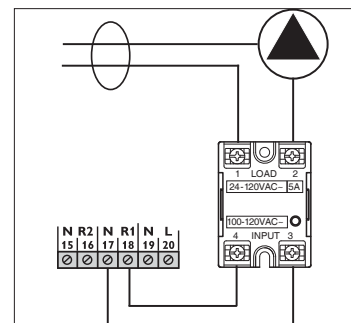

Code	Description	Lbs	USD
NA15012	120 VAC / 5A	0.1	168.00

## FLOW METERS



Cable for connecting Grundfos VFS & RPS with molded plug to BX controller with molded plug.

Code	Description	Lbs	USD
<b>NA15028</b>	VFS & RPS cable, 10' length	0.2	<b>26.30</b>



RPS Grundfos analog pressure/ temperature sensor. Requires NA15028 cable.  
Pressure measuring range: 0—150 psi.  
Temperature measurement range: 32—210°F.  
Max. fluid temperature: 250°F.  
Maximum Glycol: 50%.  
Connection: ½" male NPT.

Code	Description	Lbs	USD
<b>NA15010</b>	RPS 0—10, 0—150 psi	0.3	<b>198.50</b>



RPS Grundfos analog pressure / temperature sensor. In-line body. Requires NA15028 cable.  
Pressure measuring range: 0—150 psi.  
Temperature measurement range: 32—210°F.  
Max. fluid temperature: 250°F.  
Maximum Glycol: 50%.  
Connection: 1" male union thread.  
Select union fittings on the right.

Code	Description	Lbs	USD
<b>NA15014</b>	RPS 0—10, 0—150 psi	0.6	<b>243.80</b>




VFS Grundfos analog flow / temperature sensor. Requires NA15028 cable.  
Temperature measurement range: 32—210°F.  
Max. fluid temperature: 250°F.  
Flow measurement accuracy: 1.5%  
Flow response time: < 1 sec.  
Brass or stainless in-line body.  
Maximum glycol: 50%.  
Connection: 1" male union thread.  
Select union fittings on the right.  
Flow measurement accuracy: 1.5%  
Flow response time: <1 sec.

Code	Description	Lbs	USD
<b>NA15015</b>	VFS 1-12, ¼—3 gpm	0.6	<b>334.50</b>
<b>NA15016</b>	VFS 2-40, ½—10 gpm	0.6	<b>368.60</b>
<b>NA15017</b>	VFS 5-100, 1½—15 gpm	1.6	<b>641.00</b>



VFS Grundfos analog flow / temperature sensor. Requires NA15028 cable.  
Temperature measurement range: 32—210°F.  
Max. fluid temperature: 250°F.  
Flow measurement accuracy: 1.5%  
Flow response time: < 1 sec.  
Composite in—line body.  
Sweat unions included.  
Maximum glycol: 50%.  
Flow measurement accuracy: 1.5%  
Flow response time: <1 sec.

Code	Description	Lbs	USD
<b>NA15018</b>	VFS 10-200, 2½—20 gpm, 1" sweat	1.7	<b>907.00</b>
<b>NA15019</b>	VFS 20-400, 5—45 gpm, 1¼" sweat	3.8	<b>1,361.00</b>

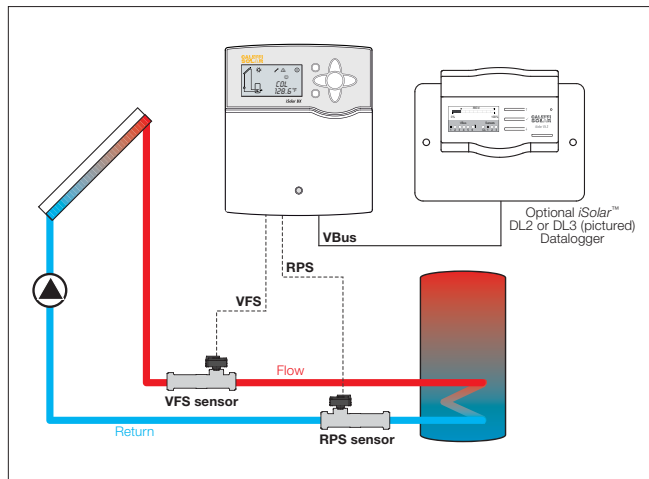

Two union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12240</b>	½" NPT with 1" union nuts	0.2	<b>42.80</b>
<b>NA12249</b>	½" sweat with 1" union nuts	0.2	<b>40.50</b>



Two union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12250</b>	¾" NPT with 1" union nuts	0.2	<b>46.80</b>
<b>NA12259</b>	¾" sweat with 1" union nuts	0.2	<b>44.50</b>



Two union nuts, washers and tail pieces.  
Low-lead brass.

Code	Description	Lbs	USD
<b>NA12260</b>	1" NPT with 1" union nuts	0.3	<b>56.90</b>
<b>NA12269</b>	1" sweat with 1" union nuts	0.3	<b>54.60</b>

## DIFFERENTIAL TEMPERATURE CONTROLLERS



Code	Description	Lbs	USD
257280A LTE	iSolar™ MX LTE	3.0	1,260.00

### 257 iSolar™ MX LTE

tech. broch. 01274

Inputs: (8) Pt1000 temperature sensors.

(1) V40 rotary inplus meter.

(1) CS10 irradiation sensor.

Outputs: (4) triac relays, (1) dry contact relay and (1) PWM / 0-10 V DC.

Triac relays capacities: 1A / 120 V.

Dry contact relay capacity: 2A / 24 V.

Power supply: 100—240 V - 50/60 Hz.

Data interface: V-Bus, SD card slot.

ΔT adjustment range: 2—40°FΔ.

Min. temperature differential 2°FΔ.

Hysteresis: 2°FΔ, ± 1°FΔ.

Max. tank temperature range: 35—205°F.

Max. collector temperature range: 210—375°F.

Emergency shut down of the collector: 230—395°F.

Min. collector temperature range: 50—195°F.

Antifreeze temperature option: 15—50°F.

kWh (BTU) flow input: 0—99 gpm.

Note: Do not attach Grundfos analog sensors

#### Function

The iSolar™ MX LTE is a multi-functional temperature differential controller with add-on system functions for use in a wide variety of solar thermal heating applications. iSolar™ MX LTE is equipped with four triac pump speed control relays and one dry contact relay. The controller is equipped with eight Pt1000 sensor inputs, one V40 impulse flow meter input and one CS10 irradiation sensor input. Several system configuration options are predefined for control of a standard solar water heating system, drainback systems, supplemental space heating, multiple storage tanks, heat dump and storage tank booster heating. Unique features include built-in SD memory card slot, built-in clock and calendar, integrated energy heat measurement inputs, parallel relay operation and drain back control.

### NA150

Steel electrical mounting box with cover fits iSolar™ MX LTE controller.



Code	Description	Lbs	USD
NA15027	Electrical box	5.0	84.00

### FAP13

The FAP13 is used for measuring the outdoor temperature with a PT1000 (platinum measuring element), 1000 Ohm. The FAP13 is placed in a weather resistant housing designed for mounting outdoors.



Code	Description	Lbs	USD
NA15023	Outdoor air temperature sensor	0.3	157.50

### CS10

The solar cell is used for measuring the irradiation intensity. The short-circuit current rises with increasing irradiation intensity. Depending on the controller, the sensor can also be used for additional indirect or direct control. The connecting two wire cable can be extended to 300 ft.



Code	Description	Lbs	USD
NA257102	Solar irradiation sensor	0.1	262.50

### NA100

18" SJ round cord, stripped and pre-tinned for connecting pump or valve to iSolar controller.



Code	Description	Lbs	USD
NA10092	18" SJ round cord	0.3	9.50



## FLOW METERS

### V40

 tech. broch. 01275



Single jet rotary pulse flow meter measures liquid flow for energy heat metering production or consumption. Accurate to International Standards OIML R75, EN1434 and MID.  
Brass body.  
Sweat connections included.  
Working temperature range: -40°—210°F.  
Max. fluid temperature: 265°F.  
Max. working pressure: 235 psi.  
Maximum glycol: 50%.

Code	Description	Lbs	USD
<b>NA79701</b>	¼—10 gpm, ¾" sweat	3.0	<b>685.00</b>


### V40

 tech. broch. 01275



Multi-jet rotary pulse flow meter measures liquid flow for energy heat metering production or consumption. Accurate to International Standards OIML R75, EN1434 and MID.  
Brass body.  
Sweat connections included.  
Working temperature range: -40°—210°F.  
Max. fluid temperature: 265°F.  
Max. working pressure: 235 psi.  
Maximum glycol: 50%.

Code	Description	Lbs	USD
<b>NA79702</b>	½—15 gpm, 1" sweat	5	<b>1,210.00</b>
<b>NA79703</b>	½—25 gpm, 1¼" sweat	8	<b>1,420.00</b>
<b>NA79704</b>	1—45 gpm, 1½" sweat	14	<b>1,735.00</b>
<b>NA79705</b>	1½—65 gpm, 2" sweat	17	<b>2,500.00</b>

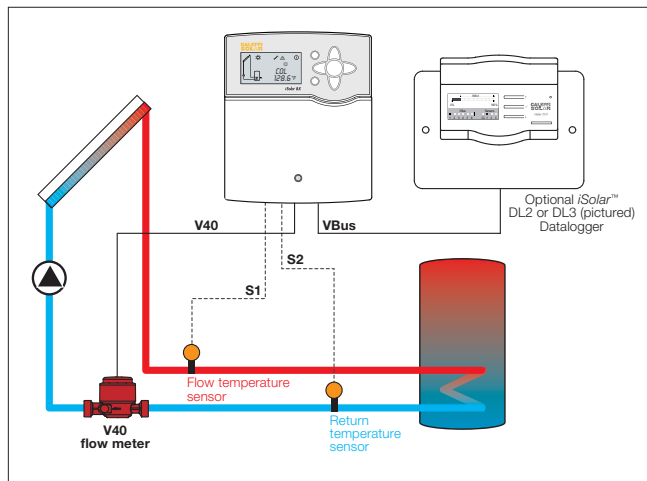

## REPLACEMENT TEMPERATURE SENSORS FOR ISOLAR™



FKP6 collector Pt1000 sensor with 5' black UV cable, Platinum RTD type, 1000 Ohm, -58—355°F, ¼" Ø O.D.

Code	Description	Lbs	USD
<b>257205</b>	Black collector sensor	0.2	<b>62.00</b>



FKP9 collector screw mount Pt1000 sensor with 5' black cable, Platinum RTD type, 1000 Ohm, -58—355°F, ¼" Ø O.D.

Code	Description	Lbs	USD
<b>257207</b>	Black collector sensor	0.2	<b>93.50</b>



FRP6 storage tank Pt1000 sensor with 8' gray cable, Platinum RTD type, 1000 Ohm, 15—200°F, ¼" Ø O.D.

Code	Description	Lbs	USD
<b>257206</b>	Gray storage sensor	0.2	<b>57.80</b>



Sensor well, ¼" Ø I.D. fits Pt1000 temperature sensors 257205 and 257206. Insertion length: 1¼".

Code	Description	Lbs	USD
<b>NA10090</b>	Sensor well, ½" NPT male thread	0.5	<b>36.40</b>
<b>NA15029</b>	Sensor well, ¾" NPT male thread	0.5	<b>55.70</b>

## DATA LOGGERS

### 257 *iSolar*<sup>™</sup> DL2




*iSolar*<sup>™</sup> DL2 intelligent web enabled datalogger connects to VBus data terminals on one *iSolar*<sup>™</sup> controller. VBus input terminals: 1. Ethernet connection: RJ45 socket. Integrated SD slot: 1. Ambient temperature: 32—100°F. Input voltage: 5 VDC ±5%. Power voltage adapter: 100—240 V. Max. current: 350 mA.

Code	Description	Lbs	USD
<b>257201A</b>	Datalogger	2.0	<b>1,025.00</b>

#### Function

The DL2 datalogger enables the acquisition and storage of large amounts of data such as energy heat metering and recorded values of the solar system over a long period of time when connected to an *iSolar*<sup>™</sup> series controller. The datalogger, when connected to a network through the integrated Ethernet socket, can be configured and viewed with any standard internet browser via its integrated web interface, without additional software. Download data through the web interface or an SD memory card for further data processing in spreadsheet programs.

#### System layout

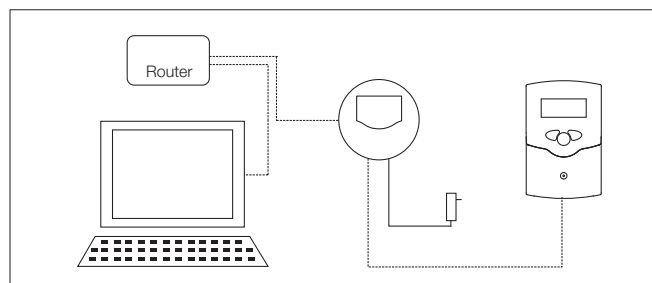

#### VBus.net

VBus.net is a service portal that offers access to solar thermal system data from all over the world. No DSL router configuration is required. To use VBus.net service, the system must be equipped with a Caleffi *iSolar*<sup>™</sup>DL2 or DL3 Data Logger. After signing on at [www.VBus.net](http://www.VBus.net), the Data Logger can be registered with the system. VBus.net enables users to access their solar thermal system data from all over the world, just by using a regular web browser. No additional software or app is required, only a registered account for the VBus.net service, a web browser and internet connection. Many mobile devices are supported as well.



### 257 *iSolar*<sup>™</sup> DL3




*iSolar*<sup>™</sup> DL3 intelligent web enabled datalogger / BACnet IP gateway connects to VBus data terminals on six *iSolar*<sup>™</sup> controllers. VBus input terminals: 6. Pt1000 sensor inputs: 3. Current loop input: 4—20 mA. Ambient temperature: 32—100°F. Input voltage: 12 VDC ±5%. Power voltage adapter: 100—240 V. Max. current: 1 A. Ethernet connection: RJ45 socket. USB connection: 1. Integrated SD card: 1 slot.

Code	Description	Lbs	USD
<b>257204A</b>	Datalogger with BACnet IP	2.0	<b>1,890.00</b>

#### Function


The DL3 datalogger / BACnet/IP gateway provides communication translation between *iSolar*<sup>™</sup> controllers and DDC system which are capable of BACnet/IP communications. Conforms with BACnet PICS, Up to six *iSolar*<sup>™</sup> controllers can be connected to DL3 with two conductor wire (bell wire) at least 20 AWG up to a distance of 150 feet. The DL3 has three additional inputs for Pt1000 temperature sensors and one 4—20 mA Current Loop analog input. A configurable IP address and password protection allows for access from any PC with an internet connection. Download data through the web interface, an SD memory card or USB cable for further data processing in spreadsheet programs.

#### System layout

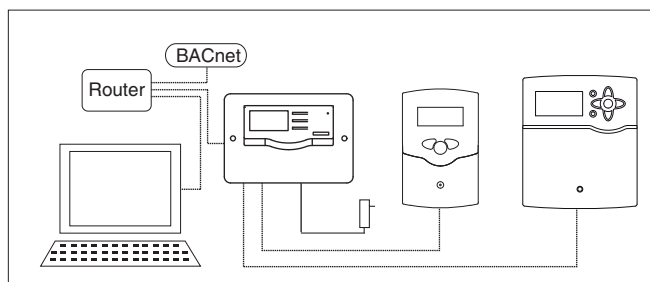


#### Multinode network

Multiple WMZ or WMZ-G1 energy heat meters can be cascaded together on the VBus connection. One WMZ is configured as the master and additional WMZ meters are configured as slaves. Up to 16 meters can be cascaded together with two conductor wire (bell wire) at least 20 AWG and up to 150 feet for transmission of data values to a connected PC, DL2 or DL3 Datalogger. The connection sequence is arbitrary, up to 16 can be cascaded together.

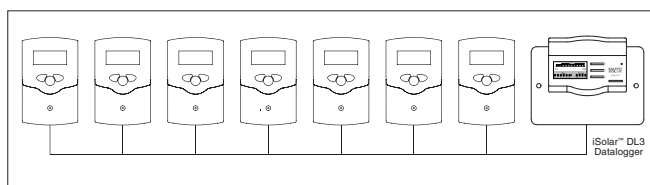

## GEOHERMAL COMPONENTS

This diagram is an example

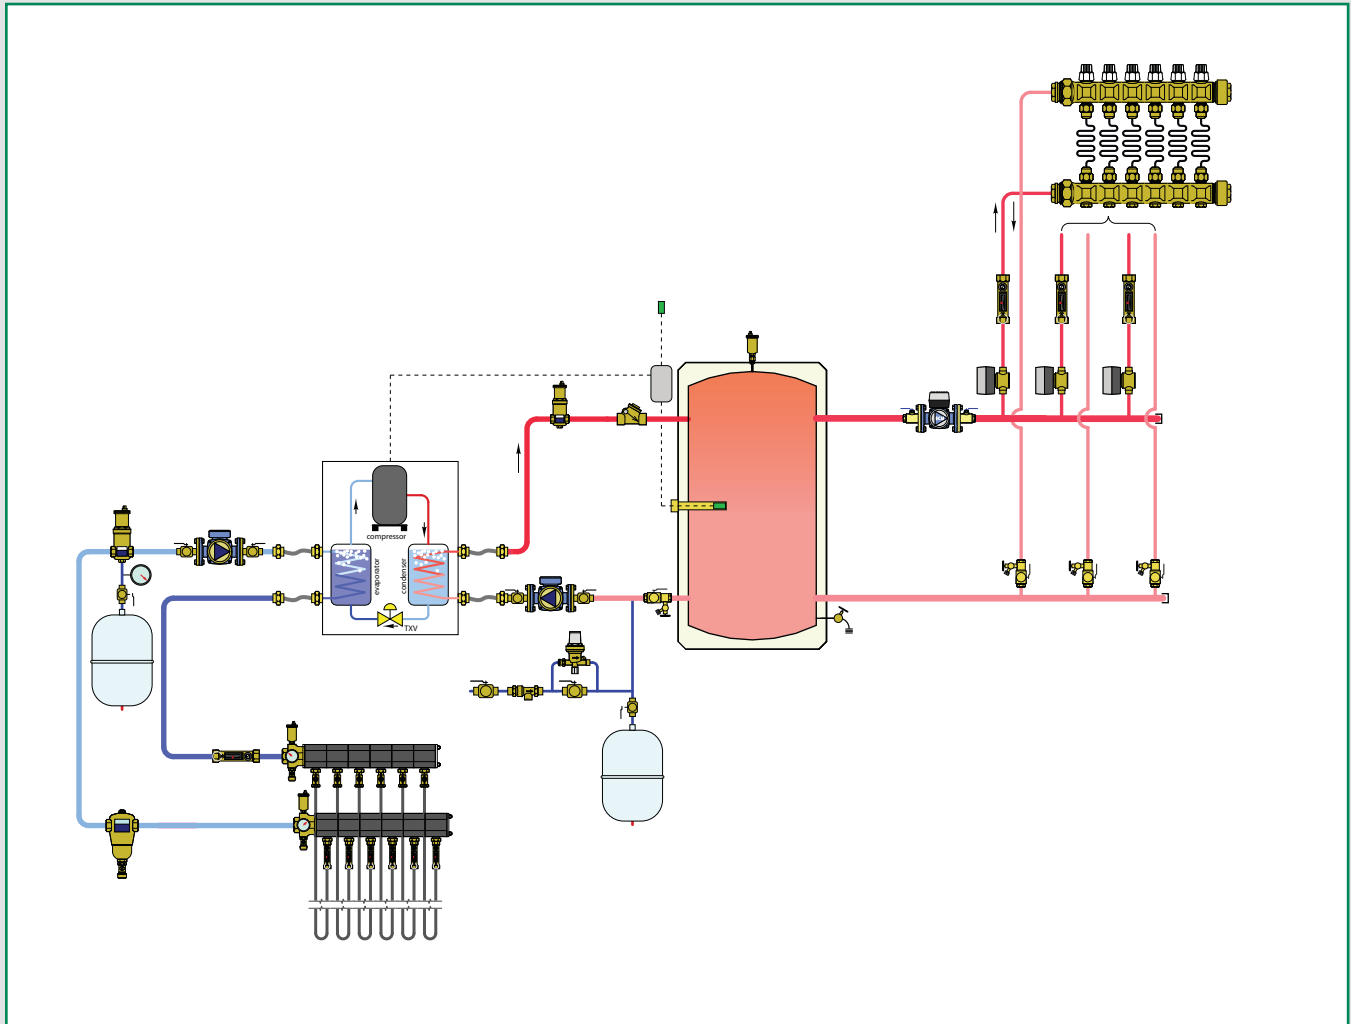

Geothermal manifolds, GeoCal™  
PE pipe connections, GeoGrip™  
Balancing valves, QuickSetter™  
Storage tanks, ThermoCon™  
Wall penetration seals, GeoSeal™  
Automatic air vents, DISCALAIR®

## MANIFOLDS

**110**

tech. broch. 03175

### GeoCal™



GeoCal™ left hand distribution manifold assemblies with temperature gauges, air vents and drain valves.

1¼" F NPT brass inlet/outlet ports.

Max. working pressure: 90 psi.

Max. system test pressure: 150 psi.

Working temperature range for: water, glycol & saline solutions: 15—140°F.

ethanol & methanol solutions: 15—90°F.

Ambient temp. range: -5—140°F.

Max. flow rate: 24 gpm total all circuits.

Code	Description	Lbs	USD
<b>1107B5LA</b>	Left side connections, 2 circuits	16	<b>1,260.00</b>
<b>1107C5LA</b>	Left side connections, 3 circuits	18	<b>1,390.00</b>
<b>1107D5LA</b>	Left side connections, 4 circuits	20	<b>1,530.00</b>
<b>1107E5LA</b>	Left side connections, 5 circuits	22	<b>1,660.00</b>
<b>1107F5LA</b>	Left side connections, 6 circuits	23	<b>1,790.00</b>
<b>1107G5LA</b>	Left side connections, 7 circuits	25	<b>1,950.00</b>
<b>1107H5LA</b>	Left side connections, 8 circuits	26	<b>2,080.00</b>



GeoCal™ right hand distribution manifold assemblies with temperature gauges, air vents and drain valves.

1¼" F NPT brass inlet/outlet ports.

Max. working pressure: 90 psi.

Max. system test pressure: 150 psi.

Working temperature range for: water, glycol & saline solutions: 15—140°F.

ethanol & methanol solutions: 15—90°F.

Ambient temp. range: -5—140°F.

Max. flow rate: 24 gpm total all circuits.


Code	Description	Lbs	USD
<b>1107B5RA</b>	Right side connections, 2 circuits	17	<b>1,260.00</b>
<b>1107C5RA</b>	Right side connections, 3 circuits	18	<b>1,390.00</b>
<b>1107D5RA</b>	Right side connections, 4 circuits	20	<b>1,530.00</b>
<b>1107E5RA</b>	Right side connections, 5 circuits	22	<b>1,660.00</b>
<b>1107F5RA</b>	Right side connections, 6 circuits	23	<b>1,790.00</b>
<b>1107G5RA</b>	Right side connections, 7 circuits	25	<b>1,950.00</b>
<b>1107H5RA</b>	Right side connections, 8 circuits	26	<b>2,080.00</b>

### Function

The GeoCal™ pre-assembled manifold for ground-source geothermal loops offers an alternative method of piping parallel earth loops, bringing all circuits to a common manifold station without labor-intensive fusion welding. GeoCal™ allows easy individual circuit balancing. Shut-off ball valves installed on the return manifold allows for easy individual circuit purging and requiring a smaller purge/fill pump than traditionally used.

Manifold assemblies include supply and return manifolds, automatic air vents, dual-scale temperature gauges, fill/drain valves, brass end caps with insulation, wall brackets with mounting hardware and labels.

GeoCal™ manifold assemblies can be installed indoors, or in an outdoor vault.

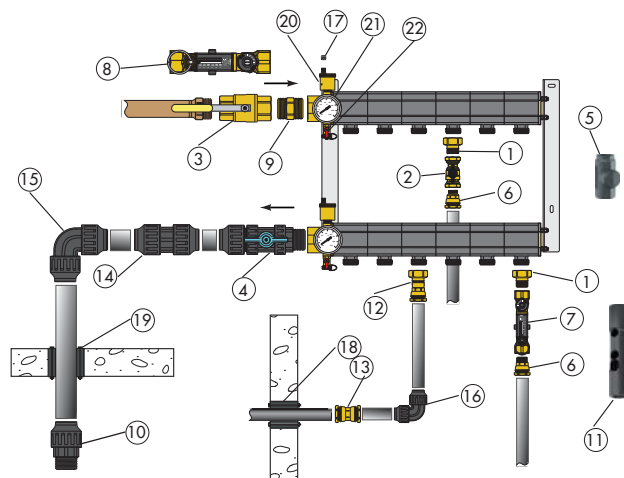

1. Manifold outlet fitting 110050A/60A\*
2. Ball valve NA39589/NA39753\*
3. Ball valve NA39588
4. GeoGrip™ ball valve NA10268
5. Optional insulation shells for Isolation valves with inlet/outlet fittings 111001/003\*
6. GeoGrip™ pipe coupling 861527A/634A\*
7. QuickSetter™ 132552A/662A\*
8. QuickSetter™ 132772A
9. Double nipple NA10263
10. GeoGrip™ male adapter NA10269
11. Insulation sleeve, 132552A and fittings 110050A and 861527A Insulation sleeve, 132662A and fittings 110060A and 861634A
12. GeoGrip™ manifold to earthloop pipe connector NA10246/247\*
13. GeoGrip™ sleeve coupling 863027/034\*
14. GeoGrip™ poly sleeve coupling for joining 1¼" x 1¼" PE piping NA863042
15. GeoGrip™ elbow NA866042, 1¼" x 1¼"
16. GeoGrip™ elbow NA866027/034\*
17. Vent cap adapter NA10204
18. GeoSeal™ wall penetration seal NA10248/NA10249\*
19. GeoSeal™ wall penetration seal NA10265
20. Air vent for manifolds 502043 CST
21. Manifold temperature gauge 687000
22. Drain valve 538402 FD

\* Part numbers fits ¾" and 1" sizes

## FITTINGS

### 110



GeoCal™ manifold outlet fitting, includes union nut and gasket.

Code	Description	Lbs	USD
<b>110050A</b>	¾" male NPT tail piece	0.4	<b>41.00</b>
<b>110060A</b>	1" male NPT tail piece	0.6	<b>45.00</b>

### 861



GeoGrip™ polyethylene pipe fittings. For joining polyethylene pipe to 132 series QuickSetter™ or NA139 ball valves.

Code	Description	Lbs	USD
<b>861527A CST</b>	¾" M NPT x ¾" PE pipe compression	0.2	<b>25.00</b>
<b>861634A CST</b>	1" M NPT x 1" PE pipe compression	0.6	<b>40.00</b>
<b>NA10288</b>	¾" M NPT x 1" PE pipe compression	0.2	<b>53.30</b>

### NA39



Brass ball valves  
Brass body.  
Max. working pressure: 150 psi.  
Max. working temperature: 365°F.



Code	Description	Cv	Lbs	USD
<b>NA39589</b>	¾" NPT female w/T-handle	35	0.6	<b>40.00</b>
<b>NA39753</b>	1" NPT female w/T-handle	50	0.7	<b>54.50</b>
<b>NA39588</b>	1¼" NPT female w/Lever	104	1.0	<b>90.80</b>

### 111



Insulation sleeve for item valve and fitting on each end.

Code	Description	Pk	Lbs	USD
<b>111001</b>	Insulation sleeve fits NA39589	1	0.1	<b>49.00</b>
<b>111003</b>	Insulation sleeve fits NA39753	1	0.1	<b>51.00</b>

## BALANCING VALVE

### 132

tech. broch. 01149



QuickSetter™ balancing valve with flow meter. Direct reading of flow rate. Brass valve body and flow meter. Graduated scale flow meter with magnetic movement flow rate indicator. Max. working pressure: 150 psi. Temperature range: 14—230°F. Max. percentage of glycol: 50%.

Code	Description	Flow scale (gpm)	Lbs	USD
<b>132552A</b>	¾" NPT	2.0—7.0	1.8	<b>272.60</b>
<b>132662A</b>	1" NPT	3.0—10.0	2.4	<b>317.90</b>
<b>132772A</b>	1¼" NPT	5.0—19.0	2.8	<b>421.70</b>
<b>132882A</b>	1½" NPT	8.0—32.0	3.4	<b>499.60</b>
<b>132992A</b>	2" NPT	12.0—50.0	4.4	<b>613.00</b>
<b>F19346</b>	Replacement by-pass valve stem*		0.1	<b>51.20</b>

\* With operating ring

### 112



QuickSetter™ Insulation sleeve for valve and fitting on each end.

Code	Description	Lbs	USD
<b>112001</b>	Insulation sleeve fits 132552A	0.1	<b>52.00</b>
<b>112003</b>	Insulation sleeve fits 132662A	0.1	<b>54.00</b>

### NA102



GeoGrip™ ball valve with T-handle. For connecting to 110 series manifold and polyethylene pipe.

Code	Description	Lbs	USD
<b>NA10268</b>	1¼" NPT x 1¼" PE pipe compression	1.0	<b>205.00</b>

### NA102



Double Nipple fits 1 ¼" QuickSetter™ or Ball Valve for GeoCal™ main inlet. Connecting 110 Series Manifold to 132772A valve or NA39588 ball valve.

Code	Description	Lbs	USD
<b>NA10263</b>	1¼" NPT x 1¼" NPT, brass	0.4	<b>27.00</b>

### NA102



GeoGrip™ male adapter.

Code	Description	Pk	Lbs	USD
<b>NA10269</b>	1¼" M NPT x 1¼" PE pipe comp.	1	0.2	<b>32.00</b>

## PE PIPE CONNECTIONS



### NA102

GeoGrip™ manifold outlet connector for joining manifold to polyethylene pipe. (Includes union nut and gasket)

Code	Description	Lbs	USD
<b>NA10246</b>	¾" PE pipe compression	0.8	<b>54.00</b>
<b>NA10247</b>	1" PE pipe compression	1.0	<b>67.00</b>



### 863

GeoGrip™ brass sleeve coupling for joining two polyethylene pipes.

Code	Description	Lbs	USD
<b>863027</b>	¾" x ¾" PE pipe compression	0.8	<b>30.00</b>
<b>863034</b>	1" x 1" PE pipe compression	1.0	<b>44.00</b>



### NA863

GeoGrip™ sleeve coupling for joining two polyethylene pipes.

Code	Description	Lbs	USD
<b>NA863042</b>	1¼" x 1¼" PE pipe compression	1.0	<b>52.00</b>



### NA866

GeoGrip™ elbow coupling for joining two polyethylene pipes.

Code	Description	Lbs	USD
<b>NA866027</b>	¾" x ¾" PE pipe compression	0.1	<b>26.00</b>
<b>NA866034</b>	1" x 1" PE pipe compression	0.4	<b>37.00</b>
<b>NA866042</b>	1¼" x 1¼" PE pipe compression	0.4	<b>57.00</b>



### NA102

Metal wrench for tightening 1¼" nuts on GeoGrip™ items NA863042, NA866042, NA10268 and NA10269.

Code	Description	Lbs	USD
<b>NA10264</b>	Tightening wrench	0.2	<b>360.00</b>



### NA102

Vent cap adapter to connect discharge tube. (Ethanol and methanol systems). Fits onto air vent.

Code	Description	Lbs	USD
<b>NA10204</b>	¼" NPT male x female	0.1	<b>27.30</b>

## WALL SEALS



### NA102

GeoSeal™ wall penetration seals. EPDM w/316 stainless steel hardware. (Priced per pair)

Code	Description	Lbs	USD
<b>NA10248</b>	¾", PE pipe thru 2.5" ID hole	0.5	<b>100.00</b>
<b>NA10249</b>	1", PE pipe thru 2.5" ID hole	0.4	<b>70.00</b>
<b>NA10265</b>	1¼", PE pipe thru 3" ID hole	0.7	<b>147.00</b>

## REPLACEMENT PARTS



### 5020

Automatic air vents fits manifolds. Brass body. Hygroscopic safety air vent cap. Max. working pressure: 150 psi. Max discharge pressure: 60 psi. Max. working temperature: 250°F.

Code	Description	Lbs	USD
<b>502043 CST</b>	½" male thread	0.5	<b>31.90</b>



### 687

Manifold temperature gauge with drywell. -20—120°F.

Code	Description	Lbs	USD
<b>687000</b>	2½" diameter	0.2	<b>26.50</b>



Fill/drain valve with ¾" garden hose connection.

Code	Description	Lbs	USD
<b>538402 FD</b>	½" NPT x ¾" GHT	0.3	<b>19.40</b>




## STORAGE TANKS

### NAS200 ThermoCon™

tech. broch. 01179



Storage tanks can serve as a thermal buffering tank with porcelain glass coated steel lining. Powder-coated steel external cover. Drain port/valve.  
 Max. working pressure: 150 psi.  
 Working temperature: -40—190°F.  
 Recommended max. delivery water temperature: 120°F.  
 Testing pressure: 300 psi.  
 Tank insulation: 2" non-CFC foam.  
 Insulation thermal conductivity: R16.  
 Connections: 25 gal. side: (4) 1½" & (1) ¾" NPT female  
 25 gal. top: (2) 1½" & (1) ¾" NPT female  
 50, 80, 120 gal. side: (7) 2" NPT female  
 50, 80, 120 gal. top: (3) ¾" NPT female

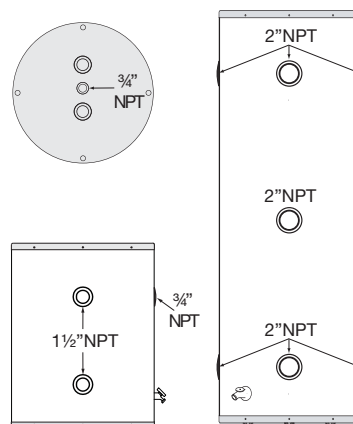

Code	Description	Lbs	USD
<b>NAS20025</b>	25 gal. tank, no HX	100	<b>2,657.00</b>
<b>NAS20050</b>	50 gal. tank, no HX	200	<b>3,176.00</b>
<b>NAS20080</b>	80 gal. tank, no HX	250	<b>3,754.00</b>
<b>NAS20120</b>	119 gal. tank, no HX	350	<b>4,967.00</b>

Reduction of Lead in Drinking Water Act Compliant: 0.25% max. weighted average lead content. Reduction of Lead in Drinking Water Act certified through Underwriters Laboratory (UL) in accordance with NSF/ANSI 372.

## STORAGE TANK ACCESSORIES



**551**  
**DISCALAIR®**  
 High discharge automatic air vent.  
 Brass body.  
 Max. working pressure: 150 psi.  
 Working temperature range: 32—250°F.

tech. broch. 01124

Code	Description	Lbs	USD
<b>551004A</b>	½" NPT female	8.2	<b>124.60</b>



Pipe nipple for attaching air vent to top of storage tank with reducing bushing.

Code	Description	Lbs	USD
<b>NA10160</b>	½" NPT male x ½" male NPT x 3"	0.1	<b>12.90</b>



Reducer bushing for inserting into top of storage tank to attach pipe nipple to air vent. 1½" hex head.

Code	Description	Lbs	USD
<b>NA10082</b>	¾" M NPT x ½" F NPT, brass	0.3	<b>8.00</b>

Magnesium anode rod.



Code	Description	Lbs	USD
<b>NA10229</b>	¾" NPT x 36" anode rod fits 50 gal.	8.0	<b>64.10</b>
<b>NA10230</b>	¾" NPT x 40" anode fits 80 & 120 gal.	9.0	<b>71.40</b>

**NEW**



Reducer bushing for installing into 2" NPT female connection in storage tank providing an ¾" NPT female thread. 1½" hex head.

Code	Description	Lbs	USD
<b>NA10234</b>	2" M NPT x ¾" F NPT, low lead brass	0.2	<b>49.80</b>

**NEW**




Male plug 1¼" square head.

Code	Description	Lbs	USD
<b>NA10339</b>	2" NPT male plug, stainless steel	0.2	<b>43.40</b>



This diagram is an example

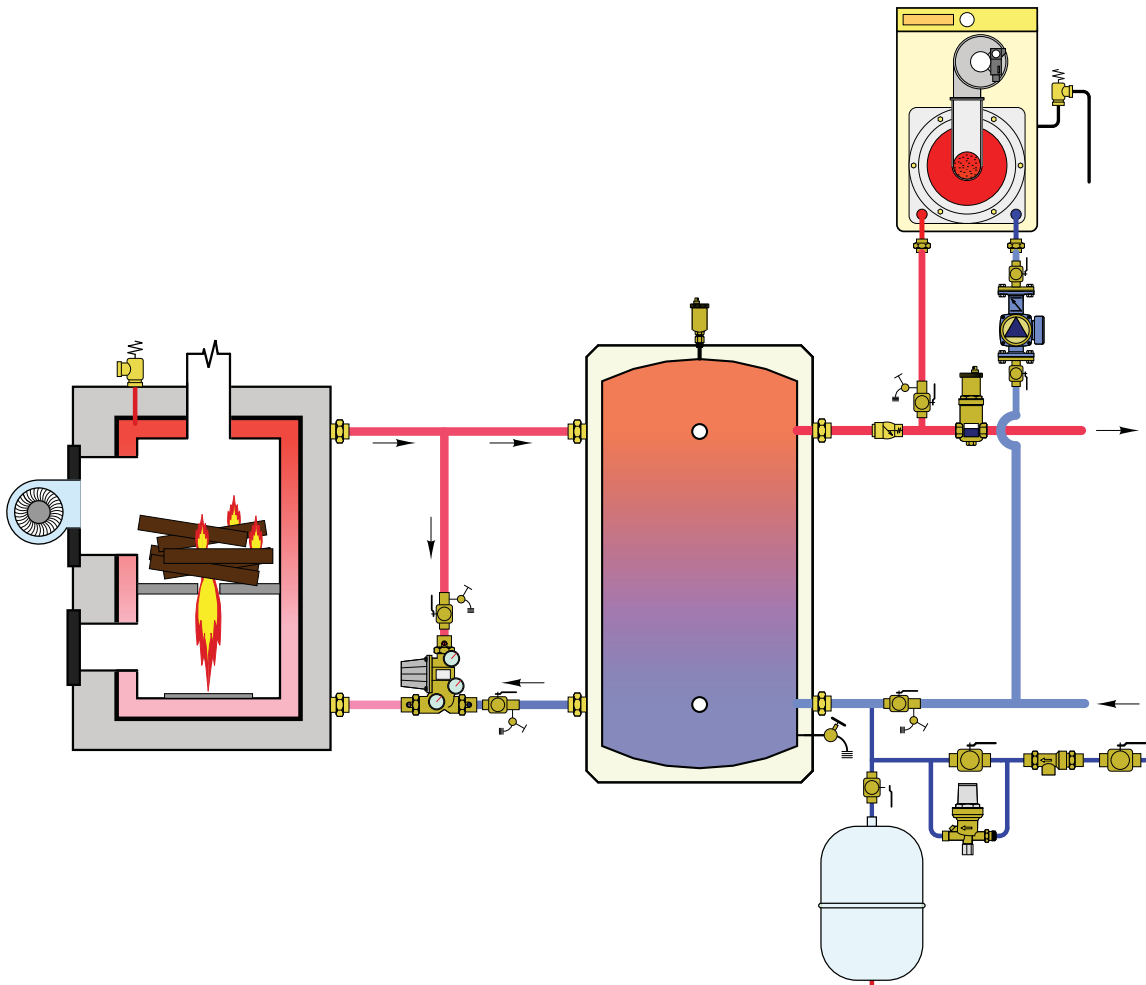

Boiler protection valves, ThermoMix™

Boiler protection recirculation and distribution unit, ThermoBloc™

## BOILER PROTECTION HIGH-FLOW THERMOSTATIC MIXING VALVE



**PCT**  
INTERNATIONAL  
APPLICATION  
PENDING

### 280 ThermoMix™ NPT

tech. broch. 01223

Boiler protection high-flow thermostatic mixing valve.  
Changeable thermostatic sensor cartridge.  
Brass body and lower plug.  
Max. working pressure: 150 psi.  
Working temperature range: 40—212°F.  
Thermostatic sensor cartridge:  
130°F & 140°F Tset standard selections, see below.  
115°F, 160°F Tset optional (field replaceable).  
Sensor cartridge accuracy: ±4°F.  
By-pass from boiler complete closing temperature: Tset +18°F (ex. 130°+18°=148°F).

Code	Description	Cv	Lbs	USD
280165A	1" NPT 130°F Tset	10	3.6	422.00
280166A	1" NPT 140°F Tset	10	3.6	422.00
280175A	1¼" NPT 130°F Tset	14	4.5	485.00
280176A	1¼" NPT 140°F Tset	14	4.5	485.00



**PCT**  
INTERNATIONAL  
APPLICATION  
PENDING


### 280 ThermoMix™ Sweat

tech. broch. 01223

Boiler protection high-flow thermostatic mixing valve.  
Changeable thermostatic sensor cartridge.  
Brass body and lower plug.  
Max. working pressure: 150 psi.  
Working temperature range: 40—212°F.  
Thermostatic sensor cartridge:  
130°F & 140°F Tset standard selections, see below.  
115°F, 160°F Tset optional (field replaceable).  
Sensor cartridge accuracy: ±4°F.  
By-pass from boiler complete closing temperature: Tset +18°F (ex. 130°+18°=148°F).

Code	Description	Cv	Lbs	USD
280965A	1" sweat 130°F Tset	10	3.6	395.00
280966A	1" sweat 140°F Tset	10	3.6	395.00
280975A	1¼" sweat 130°F Tset	14	4.5	465.00
280976A	1¼" sweat 140°F Tset	14	4.5	465.00

#### Characteristic components

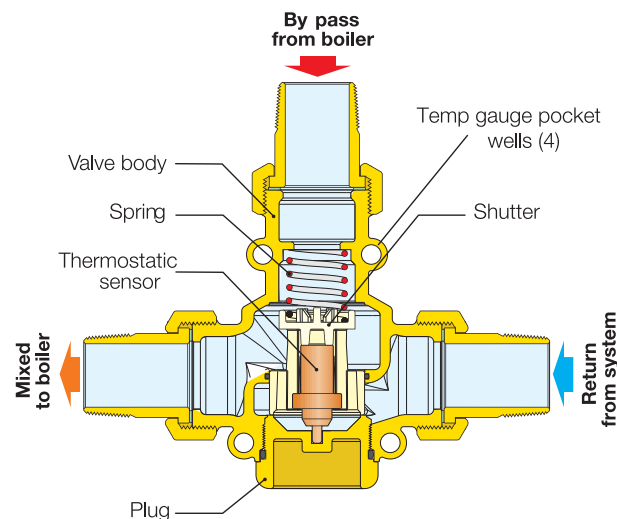

#### FUNCTION

The ThermoMix™ boiler protection high-flow thermostatic mixing valve is used in hydronic heating systems with non-condensing boilers, including solid fuel, biomass, gas, LP or oil-fired. It can be installed with steel, cast iron and copper tube style boilers, automatically controlling the return water temperature, preventing condensation of the water vapor contained in the flue gas.

The 280 series ThermoMix™ valve mixes by-pass flow from the boiler with return flow from the system, sending a fixed temperature flow to the boiler which protects against corrosion from condensation occurring when a minimum flue gas temperature is not otherwise maintained.


Changeable thermostatic sensor cartridges modifies valve temperature setting. The thermostatic sensor cartridge can easily be removed for maintenance or to change the valve set temperature, with out removing the valve body from the piping.

#### Thermostatic sensor replacement to modify setting


The thermostatic sensor can easily be removed for maintenance or to change the setting, with no need to remove the valve body from the piping.

#### Installation


The valve can be installed on both sides of the boiler in any position, vertical or horizontal. Installation is recommended on the return to the boiler in mixing mode; it can also be installed on the flow from the boiler in diverter mode.



#### Installation in mixing mode (boiler protection)

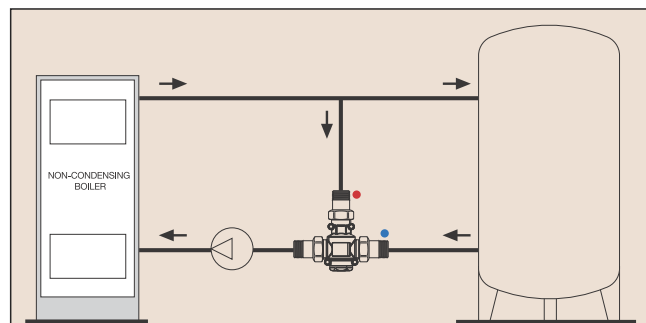

#### Installation in diverter mode (system control)

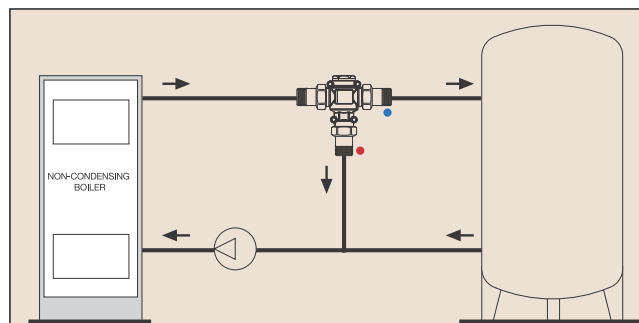

## BOILER PROTECTION RECIRCULATION AND DISTRIBUTION UNIT



**281**

tech. broch. 01224

### ThermoBloc™ NPT

ThermoBloc™ boiler protection recirculation and distribution unit.  
Suitable fluids: water, up to 50% glycol solutions.  
Max. working pressure: 150 psi.  
Working temperature range: 40—210°F.  
Maximum pumping capacity: 10 gpm.  
Temperature gauge scale: 30—250°F  
Thermostatic sensor:  
130°F & 140°F Tset standard selections, see below.  
115°F, 160°F Tset optional models\*.  
Sensor cartridge accuracy: ±4°F.  
By-pass from boiler complete closing temperature: Tset +18°F (ex. 130°+18°=148°F).  
\* Consult factory

Code	Description	Lbs	USD
<b>281165A</b>	1" NPT 130°F Tset	11	<b>1,300.00</b>
<b>281166A</b>	1" NPT 140°F Tset	11	<b>1,300.00</b>
<b>281175A</b>	1¼" NPT 130°F Tset	11	<b>1,495.00</b>
<b>281176A</b>	1¼" NPT 140°F Tset	11	<b>1,495.00</b>




**281**

tech. broch. 01224


### ThermoBloc™ Sweat

ThermoBloc™ boiler protection recirculation and distribution unit.  
Suitable fluids: water, up to 50% glycol solutions.  
Max. working pressure: 150 psi.  
Working temperature range: 40—210°F.  
Maximum pumping capacity: 10 gpm.  
Temperature gauge scale: 30—250°F  
Thermostatic sensor:  
130°F & 140°F Tset standard selections, see below.  
115°F, 160°F Tset optional models\*.  
Sensor cartridge accuracy: ±4°F.  
By-pass from boiler complete closing temperature: Tset +18°F (ex. 130°+18°=148°F).  
\* Consult factory

Code	Description	Lbs	USD
<b>281965A</b>	1" sweat 130°F Tset	11	<b>1,215.00</b>
<b>281966A</b>	1" sweat 140°F Tset	11	<b>1,215.00</b>
<b>281975A</b>	1¼" sweat 130°F Tset	11	<b>1,430.00</b>
<b>281976A</b>	1¼" sweat 140°F Tset	11	<b>1,430.00</b>
<b>F19379</b>	Replacement Pump	5	<b>515.00</b>

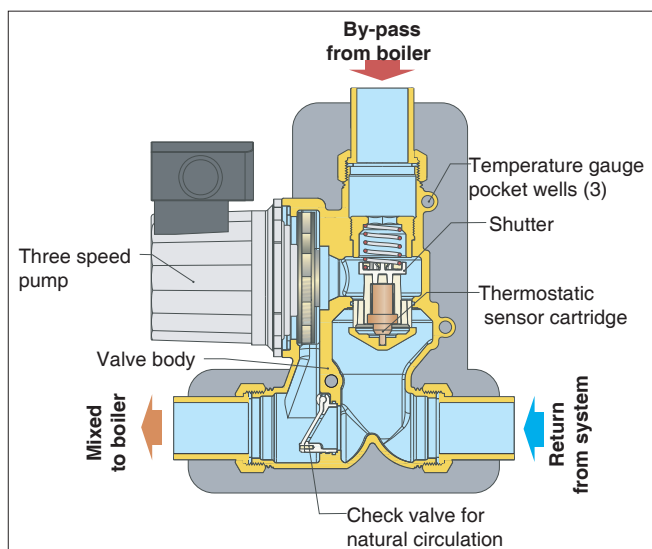

#### Flapper check valve

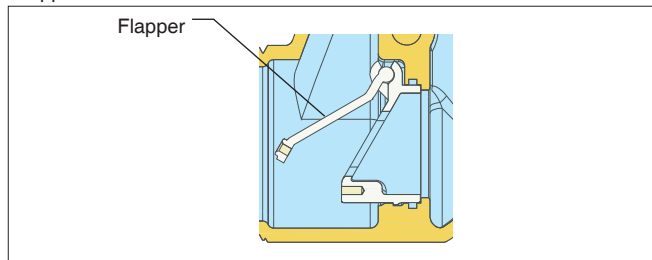


#### Function

The flapper check valve allows the natural thermosyphon circulation of the system heat transfer fluid when the pump stops running due to power failure. When the pump is running under normal conditions the thrust of the flowing medium keeps the flapper closed, forcing flow past the thermostatic sensor. When the pump stops running and the fluid in the boiler is at high temperature, natural circulation begins, by-passing the thermostatic sensor, preventing over heating in the boiler.


#### Function

The ThermoBloc™ boiler protection recirculation and distribution unit is used in hydronic heating systems with non-condensing boilers, including solid fuel, biomass, gas LP or oil-fired. It can be installed with steel, cast iron and copper tube style boilers, automatically controlling the return water temperature, protection against corrosion from condensation occurring when a minimum flue gas temperature is not otherwise maintained. The ThermoBloc™ unit is compact for easy installation, reducing required space and fittings. It combines the functionality of a boiler protection valve with a circulation pump and a unique flapper check valve allowing for thermosyphon flow between the boiler and distribution system during a power outage. The ThermoBloc™ includes three temperature gauges and is encased in an insulation shell.

#### Installation on right side of boiler

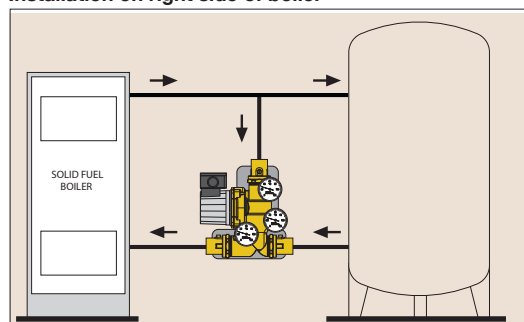

#### Installation on left side of boiler

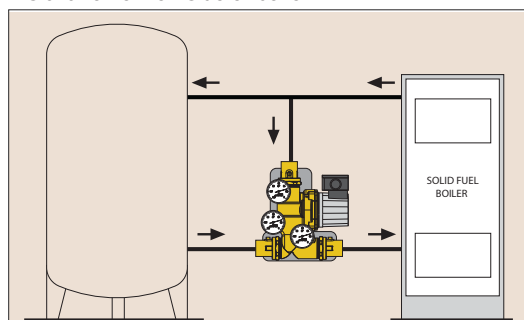



**F296**

Replacement thermostatic sensor cartridges.  
Sensor cartridge accuracy:  $\pm 4^{\circ}\text{F}$ .  
By-pass from boiler complete closing temperature:  $\text{Tset} + 18^{\circ}\text{F}$  ( $130^{\circ} + 18^{\circ} = 148^{\circ}\text{F}$ ).  
Fits 280 and 281 series boiler protection valves.  
Easy replacement to change the 280 valve set temperature without removing the valve body from the piping.

Code	Description	Lbs	USD
<b>F29633</b>	115°F Tset	0.2	<b>40.00</b>
<b>F29634</b>	130°F Tset	0.2	<b>40.00</b>
<b>F29635</b>	140°F Tset	0.2	<b>40.00</b>
<b>F29636</b>	160°F Tset	0.2	<b>40.00</b>

Selection note: thermostatic sensor cartridge will completely close at Tset value  $+18^{\circ}\text{F}$ . Example: ( $130^{\circ}\text{F Tset} + 18^{\circ}\text{F} = 148^{\circ}\text{F}$  completely closed)  $\pm 4^{\circ}\text{F}$ .



**F295**


Dual scale temperature gauge 280 and 281 series boiler protection valves.

Code	Description	Lbs	USD
<b>F29571</b>	32—250°F	0.2	<b>34.00</b>



## HEAT METERS

This diagram is an example

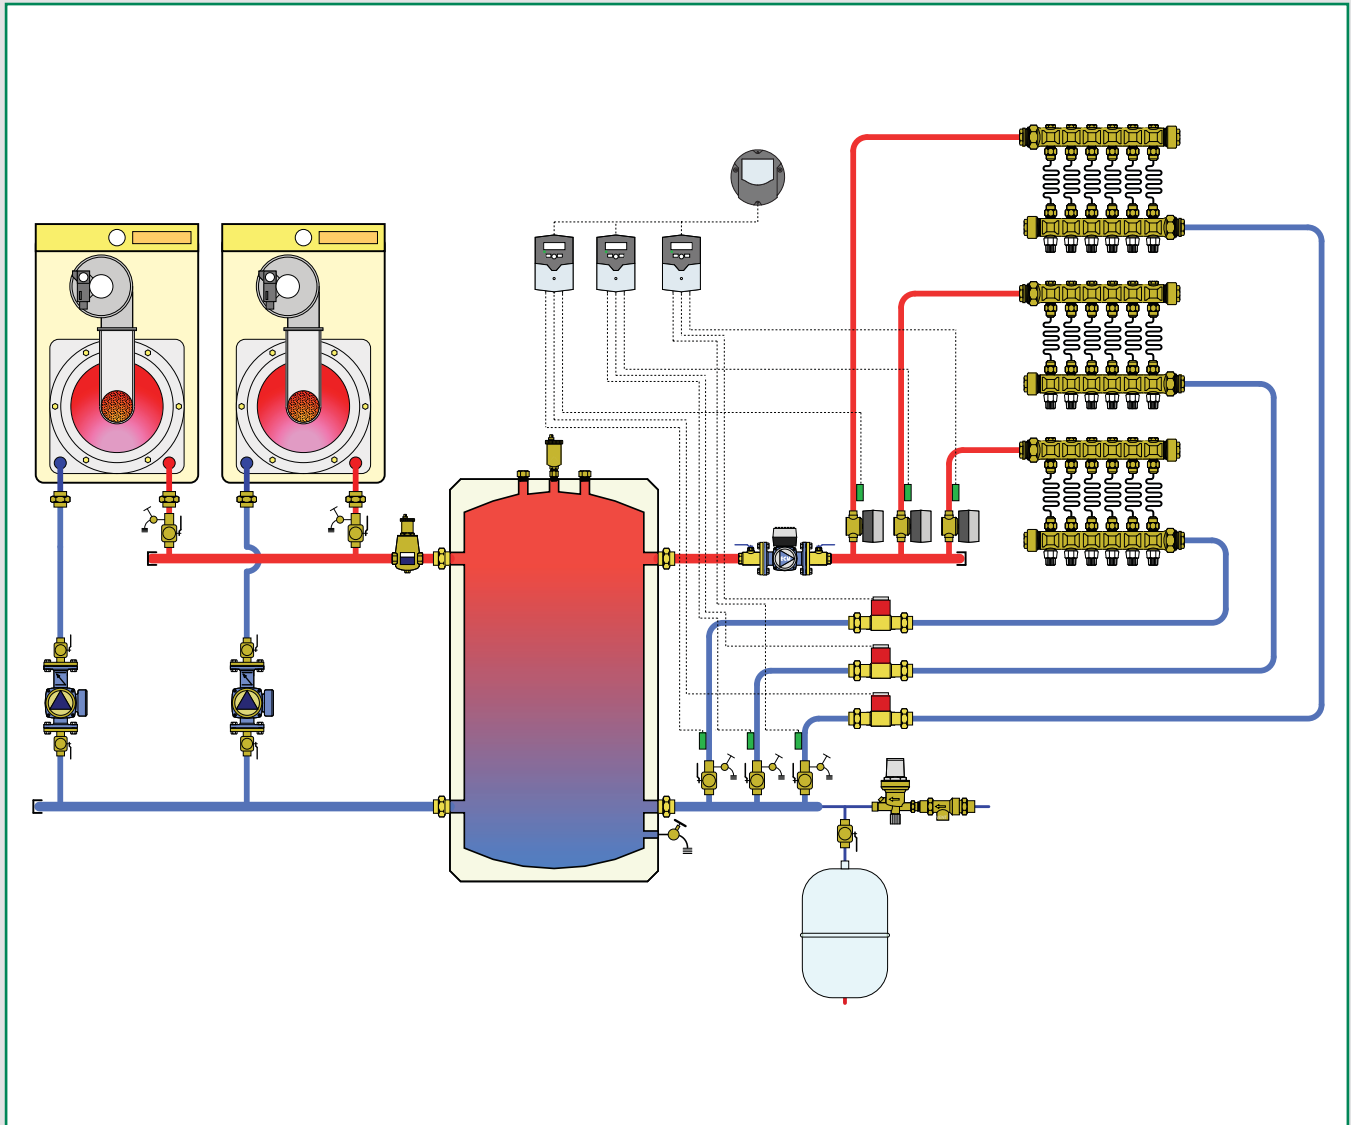

WMZ heat meters

## HEAT METERS

### 257 WMZ

tech. broch. 01275




WMZ intelligent kWh energy heat meter with data connection.  
Inputs: rotary pulse flow meter and two Pt1000 supply and return temperature sensors purchased separately.  
Temp. measurement range: -20°—300°F.  
Adj. temp. sensor offset:  $\pm 0.9^\circ\text{F}$  ( $0.5^\circ\text{K}$ ).  
Measuring precision:  $\pm 0.5^\circ\text{F}$  ( $0.3^\circ\text{K}$ ).  
Volume concentration of glycol: 0—70%.  
Pulse rate volumetric flow rate: 1—99 l/imp.  
Interface: VBus.  
Power supply: 24 V AC/DC

Code	Description	Lbs	USD
257202A	Energy heat meter	2.0	625.00

#### Function

The WMZ is a heat meter for solar thermal systems and conventional heating (or cooling) systems. The WMZ calculates heat by integrating flow rate from a rotary pulse flow meter and temperature difference in the supply and return piping using two Pt1000 temperature sensors for convenient metering of energy generated or consumed. The calculated heat energy value is displayed in kWh (kilowatt hours) and stored. Memory protection guarantees that the adjusted system settings and the calculated heat energy quantity are maintained in the case of power loss.

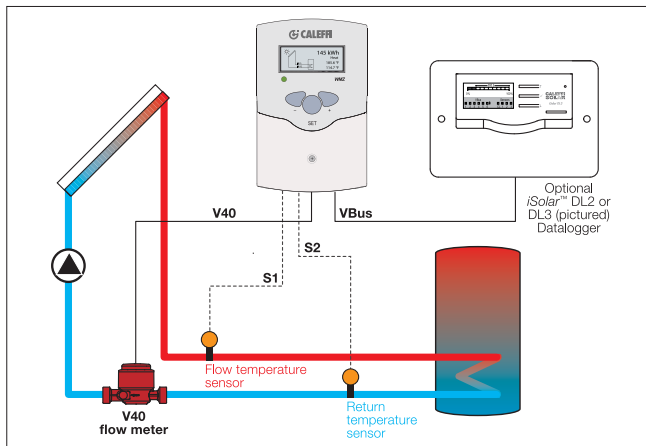

#### Multi node network

Additional WMZ energy meters can be cascaded together on the VBus connection. One WMZ is configured as the master and additional WMZ meters are configured as slaves. Up to 16 meters can be cascaded together with two conductor wire (bell wire) at least 20 AWG and up to 150 feet for transmission of data values to a connected PC or DL datalogger.



Sensor well, 1/4"  $\varnothing$  I.D. fits Pt1000 temperature sensors 257205 and 257206  
Insertion length 1 1/4".

Code	Description	Lbs	USD
NA10090	Sensor well, 1/2" NPT male thread	0.5	36.40
NA15029	Sensor well, 3/4" NPT male thread	0.5	55.70

### V40

tech. broch. 01275



Single jet rotary pulse flow meter measures liquid flow for energy heat metering production or consumption. Accurate to International Standards OIML R75, EN1434 and MID.  
Brass body.  
Sweat connections included.  
Working temperature range: -40°—210°F.  
Max. fluid temperature: 265°F.  
Max. working pressure: 235 psi.  
Maximum glycol: 50%.

Code	Description	Lbs	USD
NA79701	1/4—10 gpm, 3/4" sweat	3.0	685.00

### V40

tech. broch. 01275



Multi-jet rotary pulse flow meter measures liquid flow for energy heat metering production or consumption. Accurate to International Standards OIML R75, EN1434 and MID.  
Brass body.  
Sweat connections included.  
Working temperature range: -40°—210°F.  
Max. fluid temperature: 265°F.  
Max. working pressure: 235 psi.  
Maximum glycol: 50%.

Code	Description	Lbs	USD
NA79702	1/2—15 gpm, 1" sweat	5	1,210.00
NA79703	1/2—25 gpm, 1 1/4" sweat	8	1,420.00
NA79704	1—45 gpm, 1 1/2" sweat	14	1,735.00
NA79705	1 1/2—65 gpm, 2" sweat	17	2,500.00



FKP6 collector Pt1000 sensor with 5' black UV cable, Platinum RTD type, 1000 Ohm, -58—355°F, 1/4"  $\varnothing$  O.D.

Code	Description	Lbs	USD
257205	Black collector sensor	0.2	62.00



FRP6 storage tank Pt1000 sensor with 8' gray cable, Platinum RTD type, 1000 Ohm, 15—200°F, 1/4"  $\varnothing$  O.D.

Code	Description	Lbs	USD
257206	Gray storage sensor	0.2	57.80



FKP9 collector screw mount Pt1000 sensor with 5' black cable, Platinum RTD type, 1000 Ohm, -58—355°F, 1/4"  $\varnothing$  O.D.

Code	Description	Lbs	USD
257207	Black collector sensor	0.2	93.50

## HEAT METERS

### 257 WMZ-G1

tech. broch. 01272




WMZ-G1 intelligent kWh energy heat meter with VBus data connection. Requires VFS and RPS sensors purchased separately. Temperature measurement range: 32—210°F. Pressure measuring range: 0—150 psi. Inputs: 2 Grundfos Direct analog sensors. Alarm relay capacities: 1 A 24 V AC/DC. Interface: VBus data connection. Power supply: 24 V AC/DC.

Code	Description	Pk	Lbs	USD
257202A G1	Energy heat meter	1	2.0	<b>625.00</b>


#### Function

The WMZ-G1 is a energy heat meter for solar thermal systems and conventional heating or cooling systems. The WMZ-G1 calculates heat by integrating flow rate from a Grundfos Vortex Flow Sensor (VFS) and temperature difference in the supply and return piping using either Grundfos Relative Pressure Sensor (RPS) or VFS sensors. The calculated heat energy value is displayed in kWh (kilowatt hours) and stored. Memory protection guarantees that the adjusted system settings and the calculated heat energy quantity are maintained in the case of power loss.

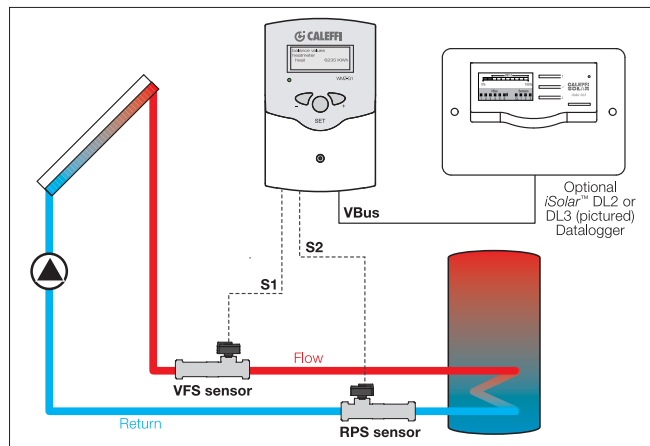

#### Multi node network

Additional WMZ-G1 energy meters can be cascaded together on the VBus connection. One WMZ-G1 is configured as the master and additional WMZ-G1 meters are configured as slaves. Up to 16 meters can be cascaded together with two conductor wire (bell wire) at least 20 AWG and up to 150 feet for transmission of data values to a connected PC or DL datalogger.

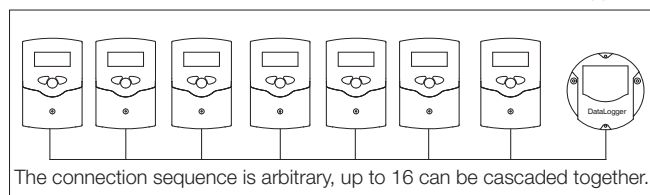

### NA150

tech. broch. 01272



Cable for connecting Grundfos VFS & RPS (molded plug) to WMZ-G1 terminal block (4 wire pins).

Code	Description	Lbs	USD
NA15030	VFS & RPS cable, 10' length	0.1	<b>26.30</b>



RPS Grundfos analog pressure/ temperature sensor. Requires NA15030 cable. Pressure measuring range: 0—150 psi. Temperature measurement range: 32—210°F. Max. fluid temperature: 250°F. Maximum Glycol: 50%. Connection: ½" male NPT.

Code	Description	Lbs	USD
NA15010	RPS 0—10, 0—150 psi	0.3	<b>198.50</b>



RPS Grundfos analog pressure / temperature sensor. In-line body. Requires NA15030 cable. Pressure measuring range: 0—150 psi. Temperature measurement range: 32—210°F. Max. fluid temperature: 250°F. Maximum Glycol: 50%. Connection: 1" male union thread. Select union fittings on page 72.

Code	Description	Lbs	USD
NA15014	RPS 0—10, 0—150 psi	0.6	<b>243.80</b>



VFS Grundfos analog flow / temperature sensor. Requires NA15030 cable. Temperature measurement range: 32—210°F. Max. fluid temperature: 250°F. Flow measurement accuracy: 1.5%. Flow response time: < 1 sec. Brass or stainless in-line body. Maximum glycol: 50%. Connection: 1" male union thread. Select union fittings on page 72. Flow measurement accuracy: 1.5%. Flow response time: < 1 sec.

Code	Description	Lbs	USD
NA15015	VFS 1-12, ¼—3 gpm	0.6	<b>334.50</b>
NA15016	VFS 2-40, ½—10 gpm	0.6	<b>368.60</b>
NA15017	VFS 5-100, 1½—15 gpm	1.6	<b>641.00</b>



VFS Grundfos analog flow / temperature sensor. Requires NA15030 cable. Temperature measurement range: 32—210°F. Max. fluid temperature: 250°F. Flow measurement accuracy: 1.5%. Flow response time: < 1 sec. Composite in—line body. Sweat unions included. Maximum glycol: 50%. Flow measurement accuracy: 1.5%. Flow response time: < 1 sec.

Code	Description	Lbs	USD
NA15018	VFS 10-200, 2½—20 gpm, 1" sweat	1.7	<b>907.00</b>
NA15019	VFS 20-400, 5—45 gpm, 1¼" sweat	3.8	<b>1,361.00</b>

Code	USD	Page(s)	Code	USD	Page(s)	Code	USD	Page(s)
110050A	41.00	105	132639AFC	375.00	69	209001	10.50	24
110060A	45.00	105	132658AFC	427.00	69	220400A	74.60	25
1107B5LA	1,260.00	104	132659AFC	375.00	69	220500A	81.90	25
1107B5RA	1,390.00	104	132662A	317.90	68,105	221400A	74.60	25
1107C5LA	1,530.00	104	132772A	421.70	68,105	221500A	81.90	25
1107C5RA	1,660.00	104	132882A	499.60	68,105	250041A	78.80	90
1107D5LA	1,790.00	104	132992A	613.00	68,105	251003A	208.80	91
1107D5RA	1,950.00	104	142241A	155.00	70	251004A	157.30	90
1107E5LA	2,080.00	104	142251A	165.00	70	252149A	252.90	91
1107E5RA	1,260.00	104	142261A	225.00	70	252158A	327.40	91
1107F5LA	1,390.00	104	142271A	320.00	70	252159A	266.50	91
1107F5RA	1,530.00	104	142281A	360.00	70	252168A	372.50	91
1107G5LA	1,660.00	104	142291A	460.00	70	252169A	308.70	91
1107G5RA	1,790.00	104	163600A	1,890.00	38	253040	78.50	91
1107H5LA	1,950.00	104	163610A	1,890.00	38	253042	78.50	91
1107H5RA	2,080.00	104	165001	66.20	38	253043	78.50	91
111001	49.00	105	165600A	1,420.00	38	253044	78.50	91
111003	51.00	105	165602A	1,735.00	38	253046	78.50	91
112001	52.00	105	165610A	1,420.00	38	253048	78.50	91
112003	54.00	105	165612A	1,735.00	38	254452	31.80	93
120141A 000	167.90	67	166600A	1,735.00	39	254752	36.30	93
120149A 000	159.90	67	166602A	2,050.00	39	255007	200.00	85
120151A 000	170.10	67	166610A	1,735.00	39	255010A	336.00	85
120159A 000	162.00	67	166612A	2,050.00	39	255050A	1,313.00	86
120161A 000	335.80	67	167600A	2,050.00	39	255056A	1,050.00	86
120169A 000	319.70	67	167602A	2,365.00	39	256050A	1,145.00	86
120171A 000	382.00	67	167610A	2,050.00	39	256056A	882.00	86
120179A 000	363.80	67	167612A	2,365.00	39	256059A	1,223.00	87
120341A 000	181.80	67	1715C1A	2,011.00	40	257201A	1,025.00	102
120349A 000	173.10	67	1715C1AHE	2,326.00	40	257202A	625.00	114
120351A 000	184.00	67	1715D1A	2,112.00	40	257202A G1	625.00	115
120359A 000	175.20	67	1715D1AHE	2,427.00	40	257204A	1,890.00	102
120361A 000	349.70	67	1715E1A	2,214.00	40	257205	62.00	101,114
120369A 000	333.00	67	1715E1AHE	2,529.00	40	257206	57.80	101,114
120371A 000	396.00	67	1715F1A	2,316.00	40	257207	93.50	101,114
120379A 000	377.10	67	1715F1AHE	2,631.00	40	257208	31.50	96
121141A	185.20	65	1715G1A	2,417.00	40	257220A	500.00	96
121149A	176.40	65	1715G1AHE	2,732.00	40	257260A	760.00	96
121151A	187.40	65	1715H1A	2,519.00	40	257260A PV1	760.00	96
121159A	178.50	65	1715H1AHE	2,834.00	40	257260A PV2	760.00	96
121161A	382.00	65	1715I1A	2,621.00	40	257270A	1,025.00	98
121169A	363.80	65	1715I1AHE	2,936.00	40	257280A LTE	1,260.00	100
121171A	428.40	65	1715L1A	2,722.00	40	259012	171.90	85
121179A	407.90	65	1715L1AHE	3,037.00	40	259018	213.50	85
121341A	198.50	65	1715M1A	2,824.00	40	259025	276.40	85
121349A	189.60	65	1715M1AHE	3,139.00	40	259033	471.90	85
121351A	201.30	65	1715N1A	2,926.00	40	259050	595.00	85
121359A	191.70	65	1715N1AHE	3,241.00	40	280165A	422.00	56,110
121361A	395.90	65	1715O1A	3,027.00	40	280166A	422.00	56,110
121369A	377.10	65	1715O1AHE	3,342.00	40	280175A	485.00	56,110
121371A	442.30	65	1725C1A	1,576.00	41	280176A	485.00	56,110
121379A	421.20	65	1725C1AHE	1,891.00	41	280965A	395.00	56,110
127341AF	133.80	64	1725D1A	1,678.00	41	280966A	395.00	56,110
127349AF	127.40	64	1725D1AHE	1,993.00	41	280975A	465.00	56,110
127351AF	139.90	64	1725E1A	1,779.00	41	280976A	465.00	56,110
127356AF	138.80	64	1725E1AHE	2,094.00	41	281165A	1,300.00	111
127359AF	133.10	64	1725F1A	1,881.00	41	281166A	1,300.00	111
127361AF	160.40	64	1725F1AHE	2,196.00	41	281175A	1,495.00	111
127369AF	152.80	64	1725G1A	1,983.00	41	281176A	1,495.00	111
130400A	185.00	66	1725G1AHE	2,298.00	41	281965A	1,215.00	111
130500A	200.00	66	1725H1A	2,084.00	41	281966A	1,215.00	111
130600A	240.00	66	1725H1AHE	2,399.00	41	281975A	1,430.00	111
130700A	300.00	66	1725I1A	2,186.00	41	281976A	1,430.00	111
130800A	375.00	66	1725I1AHE	2,501.00	41	301040	63.00	27
130900A	500.00	66	1725L1A	2,288.00	41	301140	63.00	27
132432A	253.10	68	1725L1AHE	2,603.00	41	301241	110.30	27
132438AFC	355.00	69	1725M1A	2,389.00	41	301341	110.30	27
132439AFC	302.00	69	1725M1AHE	2,704.00	41	31390 FD	28.90	95
132458AFC	355.00	69	1725N1A	2,491.00	41	31401 FD	50.90	75
132459AFC	302.00	69	1725N1AHE	2,806.00	41	31403 FD	84.00	75
132538AFC	378.00	69	1725O1A	2,592.00	41	31426 FD	100.60	75
132539AFC	325.00	69	1725O1AHE	2,907.00	41	31428FD	130.10	75
132552A	272.60	68,105	200000	76.20	24	31553FD	22.50	75
132558AFC	378.00	69	201000	136.50	24	31554 FD	45.20	74,75
132559AFC	325.00	69	203502	258.30	24	31901A	15.60	73,94
132638AFC	427.00	69	209000	26.30	24	31970A	18.00	75

Code	USD	Page(s)	Code	USD	Page(s)	Code	USD	Page(s)
337221A	13.70	11	523006	966.00	57	548098A	1,598.00	5
338452	78.50	26	523008	1,657.00	57	548099A	1,865.00	5
339452	84.60	26	523160A	1,372.00	54	548102A	5,513.00	5
342452	51.70	26	523160AC	1,529.00	54	549052A	4,662.00	4
343452	54.20	26	523168A	1,276.00	54	549062A	4,967.00	4
386500	12.40	47	523168AC	1,434.00	54	549082A	6,216.00	4
387100	54.00	49	523170A	1,570.00	54	549102A	6,962.00	4
387127	110.00	25	523170AC	1,727.00	54	549506A	1,375.00	4
41371A	73.50	74	523177A	1,583.00	54	549507A	1,665.00	4
41372A	94.50	74	523177AC	1,740.00	54	549508A	2,185.00	4
41380A	18.00	75	523178A	1,495.00	54	549509A	2,545.00	4
41787 CST	52.50	74	523178AC	1,653.00	54	549596A	1,315.00	4
41788 CST	70.40	74	523179A	1,266.00	54	549597A	1,585.00	4
41789 CST	91.40	74	523180A	2,177.00	54	549598A	2,080.00	4
41882A	79.40	75	523180AC	2,565.00	54	549599A	2,425.00	4
437516	10.70	28	523188A	2,102.00	54	551003A	157.90	14
449000	12.50	49	523188AC	2,491.00	54	551003AC	167.70	14
449010	15.80	24	523190A	2,492.00	54	551004A	124.60	11,107
449740	5.50	27	523190AC	2,880.00	54	551005A	261.00	13
472000	247.80	24	523198A	2,416.00	54	551005AC	270.80	13
501502A	404.30	7,10	523198AC	2,804.00	54	551006A	288.30	13
502015A	22.60	10	523199A	1,936.00	54	551006AC	298.10	13
502043 CST	31.90	49,106	535004	73.50	61	551007A	421.10	13
502043A	31.90	7,10	535051A	245.90	61	551007AC	430.90	13
502115A	30.50	10	535056A	255.80	61	551008A	548.00	13
502243A	54.80	10	535059A	243.60	61	551008AC	557.80	13
502343A	64.70	7,10	538202 FD	19.00	8,67	551009A	669.00	13
502610A	20.30	11	538402 FD	19.40	7,8,18,67,106	551009AC	678.80	13
502620A	21.20	11	546016A	472.30	16	551022A	152.40	14
502640	30.50	11	546050A	3,651.00	16	551022AC	162.20	14
502710A	28.10	11	546060A	3,848.00	16	551028A	274.70	13
502720A	29.70	11	546080A	4,956.00	16	551028AC	284.50	13
508013A	11.10	11	546095A	407.10	16	551035A	401.00	13
508100A	9.60	11	546096A	449.60	16	551035AC	410.80	13
519006	89.30	39	546097A	536.00	16	551041A	522.00	13
519502A	168.30	8	546100A	5,433.00	16	551041AC	531.80	13
519566A	178.20	8	546116A	561.00	16	551050A	2,875.00	15
519599A	166.00	8	546120A	7,837.00	16	551054A	637.00	13
519600A	261.10	8	546150A	9,562.00	16	551054AC	646.80	13
519609A	261.10	8	546195A	486.50	16	551060A	3,074.00	15
519700A	313.40	8	546196A	538.00	16	551080A	4,069.00	15
519709A	313.40	8	546197A	640.00	16	551100A	4,552.00	15
52110A	192.70	53	546205A	243.50	18	551120A	6,625.00	15
521342A	271.00	53	546206A	269.20	18	551150A	8,536.00	15
521349A	259.20	53	546207A	392.20	18	553542A	155.50	60
521352A	282.80	53	546208A	508.00	18	553549A	148.20	60
521359A	271.00	53	546209A	624.00	18	553642A	175.50	60
521362A	335.80	53	546228A	256.40	18	553649A	168.20	60
521369A	323.80	53	546235A	373.50	18	559920A	1,195.00	6
521400A	259.50	52	546241A	483.60	18	559921A	1,229.00	6
521400AC	284.90	52	546254A	595.00	18	559922A	1,468.00	6
521409A	248.20	52	546306A	311.50	18	559931A	1,765.00	6
521409AC	273.60	52	546307A	454.90	18	561402A	19.50	11,13
521410A	305.70	52	546308A	592.00	18	562100	25.40	22
521410AC	331.10	52	546309A	714.00	18	573002A	266.90	60
521419A	294.40	52	546328A	296.70	18	573009A	254.20	60
521419AC	319.80	52	546335A	433.20	18	573012A	286.90	60
521500A	270.80	52	546341A	564.00	18	573019A	274.20	60
521500AC	307.90	52	546354A	688.00	18	573403A	121.30	60
521506A	271.40	53	546510A	3,128.00	20	573409A	115.60	60
521509A	259.50	52	546510AM	3,910.00	21	573493A	118.60	60
521509AC	296.60	52	546550A	1,944.00	20	573503A	127.40	60
521510A	317.00	52	546550AM	2,430.00	21	586600	13.40	81
521510AC	353.90	52	546560A	2,091.00	20	5927B5A	510.00	45
521516A	322.90	53	546560AM	2,614.00	21	5927C5A	547.00	45
521519A	305.70	52	546580A	2,828.00	20	5927D5A	572.00	45
521519AC	342.60	52	546580AM	3,535.00	21	5927E5A	646.00	45
521600A	321.60	52	548006A	1,063.00	5	5927F5A	683.00	45
521600AC	358.70	52	548007A	1,281.00	5	5927G5A	739.00	45
521609A	309.10	52	548008A	1,678.00	5	5927H5A	804.00	45
521609AC	346.20	52	548009A	1,958.00	5	59474A	15.80	11
521610A	364.50	52	548052A	3,696.00	5	59756	199.80	22
521610AC	401.40	52	548062A	3,938.00	5	59804A	16.90	11
521619A	352.00	52	548082A	4,925.00	5	59817A	26.90	73
521619AC	388.90	52	548096A	1,012.00	5	59829	154.50	22
523005	685.00	57	548097A	1,221.00	5	59834A	25.20	73,94

Code	USD	Page(s)	Code	USD	Page(s)	Code	USD	Page(s)
59840A	39.50	73	6686O5S1A	1,875.00	42	F29635	40.00	57,112
59893A	34.80	73	6687C5S1A	810.00	42	F29636	40.00	57,112
59894A	64.80	73	6687D5S1A	921.00	42	F31868	15.10	75,93
59904A	32.40	73	6687E5S1A	1,033.00	42	F36073	10.50	25
59905A	38.20	73	6687F5S1A	1,142.00	42	F39807	75.60	22
59906A	62.50	73	6687G5S1A	1,254.00	42	F41186	4.50	75,76
61215A	27.30	77,95	6687H5S1A	1,365.00	42	F50055	2.10	7,73,93
626009	30.50	8	6687I5S1A	1,476.00	42	F52429	5.00	53
626600A	325.40	8	6687L5S1A	1,587.00	42	F59650	45.90	60
644004	329.30	36	6687M5S1A	1,698.00	42	F61008	5.70	73,93
644240A	418.30	36	6687N5S1A	1,809.00	42	F61008/C	6.80	73,93
644249A	411.50	36	6687O5S1A	1,920.00	42	F67037	1.15	8,49
644250A	432.10	36	669050	42.80	49	F69590	16.20	49
644256A	464.80	36	675900A	13.50	49	F69600	36.30	49
644259A	425.10	36	676049A	58.20	30	NA10001	12.50	75,93
644260A	459.50	36	676056A	84.50	30	NA10002	12.50	73,94
644269A	452.70	36	676059A	72.30	30	NA10003	14.50	73,94
644340A	452.70	36	676069A	86.30	30	NA10005	10.80	31
644340A 3BY	452.70	36	676249A	221.60	30	NA10006	13.50	31
644349A	445.70	36	676256A	247.90	30	NA10007	22.20	31
644349A 3BY	445.70	36	676259A	235.70	30	NA10009	57.00	74
644350A	466.30	36	676269A	249.70	30	NA10042	29.50	95
644350A 3BY	466.30	36	676349A	187.40	30	NA10056	81.10	53,73
644356A	477.80	36	676356A	213.70	30	NA10058	89.00	53,73
644356A 3BY	477.80	36	676359A	201.50	30	NA10060	27.30	76,94
644359A	459.50	36	676369A	215.50	30	NA10061	28.50	76,94
644359A 3BY	459.50	36	680503A	12.40	47	NA10062	29.50	76,94
644360A	493.70	36	680504A	12.40	47	NA10064	30.70	77,94
644360A 3BY	493.70	36	680505A	12.40	47	NA10082	8.00	84,107
644369A	487.00	36	680507	12.40	47	NA10083	17.00	77
644369A 3BY	487.00	36	680555A	12.40	47	NA10085	26.10	94
656304	137.70	48	681503A	13.00	28	NA10087	27.50	77,95
656314	163.40	30,48	681524	13.00	28	NA10089	22.70	77,94
656314R	178.10	48	681555	13.00	28	NA10090	36.40	101,114
656404	103.30	24,48	682530A	12.80	47	NA10092	9.50	98,100
656414	129.20	24,30,48	682540A	12.80	28,47	NA10093	64.60	84
659044	403.30	46	682545A	13.80	47	NA10100	100.00 net	83
659064	438.80	46	682550A	24.40	47	NA10103	252.80	90
659084	517.00	46	687000	26.50	106	NA10104	4.50	77
659104	595.00	46	688003A	50.30	8,49,53,54,73	NA10116	44.80	95
659124	672.00	46	69122 CST	16.20	49	NA10118	27.30	76,93
6636C5A	625.00	44	69184	25.30	49	NA10119	37.50	77,95
6636D5A	722.00	44	69293A	21.90	33	NA10120	73.50	96
6636E5A	819.00	44	69294A	21.90	33	NA10126	100.00 net	80,83
6636F5A	916.00	44	694045	24.60	7	NA10160	12.90	107
6636G5A	1,013.00	44	861527A CST	25.00	105	NA10164	32.40	73
6636H5A	1,111.00	44	861634A CST	40.00	105	NA10165	38.20	73
6636I5A	1,208.00	44	863027	30.00	106	NA10166	62.50	73
6636L5A	1,305.00	44	863034	44.00	106	NA10197	2.10	60
6636M5A	1,402.00	44	940451	23.60	28	NA10204	27.30	22,90,106
6636N5A	1,499.00	44	942550	15.50	47	NA10229	64.10	84,107
6636O5A	1,596.00	44	CBN130400A	40.70	66	NA10230	71.40	84,107
6636P5A	1,875.00	44	CBN130500A	44.00	66	NA10233	10.50	67
6637C5A	666.00	44	CBN130600A	52.80	66	NA10234	49.80	84,107
6637D5A	762.00	44	CBN130700A	66.00	66	NA10235	21.00	67
6637E5A	859.00	44	CBN130800A	82.50	66	NA10236	21.40	77
6637F5A	957.00	44	CBN130900A	110.00	66	NA10246	54.00	106
6637G5A	1,054.00	44	CBN142241A	37.20	70	NA10247	67.00	106
6637H5A	1,151.00	44	CBN142251A	39.60	70	NA10248	100.00	106
6637I5A	1,248.00	44	CBN142261A	54.00	70	NA10249	70.00	106
6637L5A	1,345.00	44	CBN142271A	76.80	70	NA10262	13.90	28,47
6637M5A	1,442.00	44	CBN142281A	86.40	70	NA10264	360.00	106
6637N5A	1,540.00	44	CBN546002	115.50	16	NA10265	147.00	106
6637O5A	1,637.00	44	CBN546205	73.50	18	NA10268	205.00	105
6637P5A	1,923.00	44	CBN546207	78.80	18	NA10269	32.00	105
668000	117.80	48	CBN546209	86.10	18	NA10271	4.20	81
6686C5S1A	764.00	42	CBN551005	73.50	13	NA10272	52.50	81
6686D5S1A	875.00	42	CBN551007	78.80	13	NA10273	16.20	61
6686E5S1A	986.00	42	CBN551009	86.10	13	NA10288	53.30	105
6686F5S1A	1,097.00	42	F11344	5.00	8,49	NA10295	109.50	8
6686G5S1A	1,208.00	42	F19149	420.00	55	NA10296	118.50	8
6686H5S1A	1,319.00	42	F19346	51.20	68,69,105	NA10302	3.20	73,81,94
6686I5S1A	1,430.00	42	F19379	515.00	111	NA10313	15.00	28,47
6686L5S1A	1,541.00	42	F29571	34.00	57,112	NA10315	178.90	54,73
6686M5S1A	1,652.00	42	F29633	40.00	57,112	NA10328	73.80	53,73
6686N5S1A	1,763.00	42	F29634	40.00	57,112	NA10339	43.40	84,107



Code	USD	Page(s)	Code	USD	Page(s)	Code	USD	Page(s)
NA10342	15.00	34	NA16369	820.00	55	NA546510A	4,570.00	20
NA10343	90.00	35	NA16469	1,040.00	55	NA546510AM	5,484.00	21
NA10358	90.50	53,73	NA17156	1,580.00	45	NA546512A	6,589.00	20
NA10363	20.00	60	NA17156HE	1,895.00	45	NA546512AM	7,906.00	21
NA10366	78.80	54	NA17256	1,145.00	45	NA546515A	8,452.00	20
NA10367	194.30	54	NA17256HE	1,460.00	45	NA546515AM	10,142.00	21
NA12102	39.90	92	NA254712	43.20	94	NA546550A	3,014.00	20
NA12103	53.80	92	NA255002	110.30	85	NA546550AM	3,617.00	21
NA12104	86.10	92	NA255003	50.50	86	NA546560A	3,207.00	20
NA12112	3.70	93	NA255004	50.50	86	NA546560AM	3,849.00	21
NA12113	5.70	93	NA25510	2,520.00	50,90	NA546580A	4,176.00	20
NA12114	9.10	95	NA255112	158.00	88	NA546580AM	5,011.00	21
NA12122	27.30	76,93	NA255160	2,180.00	89	NA548052A	4,862.00	5
NA12123	34.10	76,93	NA25540	20.00	85	NA548062A	5,229.00	5
NA12124	54.60	77,95	NA25549	18.80	85	NA548082A	6,326.00	5
NA12132	48.20	92	NA256011	210.00	88	NA548102A	6,689.00	5
NA12133	50.70	92	NA256012	315.00	85	NA548120A	9,345.00	5
NA12134	57.10	92	NA257102	262.50	100	NA548150A	11,340.00	5
NA12145	41.60	83	NA26640	58.40	86	NA548200A	17,850.00	5
NA12146	103.10	83	NA26649	96.00	87	NA548250A	25,200.00	5
NA12147	141.30	83	NA26650	63.20	86	NA548300A	30,500.00	5
NA12152	29.20	76,93	NA26659	107.70	87	NA549052A	6,321.00	4
NA12153	50.70	72	NA26660	122.40	86	NA549062A	6,799.00	4
NA12154	55.80	72	NA26669	117.80	87	NA549082A	8,222.00	4
NA12155	79.40	72	NA267002	131.30	85	NA549102A	8,694.00	4
NA12156	48.80	89	NA267003	24.20	85	NA549150A	14,732.00	4
NA12162	31.60	77,94	NA26710	336.00	88	NA549200A	24,150.00	4
NA12168	340.00	86	NA26711	685.00	87	NA549250A	33,600.00	4
NA12169	540.00	89	NA26740	116.80	86	NA549300A	45,000.00	4
NA12170	340.00	86	NA26749	191.90	87	NA551050A	3,514.00	15
NA12171	420.00	87	NA26750	126.40	86	NA551060A	3,757.00	15
NA12172	27.30	76,93	NA26759	215.50	87	NA551080A	4,973.00	15
NA12173	34.10	76,93	NA26760	244.90	86	NA551100A	5,564.00	15
NA12175	340.00	86	NA26769	235.60	87	NA551120A	8,097.00	15
NA12240	42.80	72,88,99	NA29284	64.10	90	NA551150A	10,433.00	15
NA12249	40.50	72,88,99	NA3140-02	194.30	84	NA551995	337.30	14
NA12250	46.80	72,88,99	NA35001	93.10	92	NA551996	372.60	14
NA12256	52.50	31,72	NA35002	19.80	92	NA553252	591.00	62
NA12259	44.50	72,88,99	NA35003	315.00	92	NA553259	580.00	62
NA12260	56.90	72,88,99	NA35004	593.00	92	NA553259-B	447.70	62
NA12269	54.60	72,88,99	NA35005	593.00	92	NA553362	723.00	62
NA12340	64.30	72	NA35006	593.00	92	NA553362P	472.50	61
NA12349	60.80	72	NA35007	78.90	92	NA553369	709.00	62
NA12350	70.20	72	NA3520-15	1,575.00	92	NA553369-B	575.00	62
NA12356	78.75	31,72	NA3540-15	1,785.00	92	NA553372	837.00	62
NA12359	66.80	72	NA3540-B	30.00	92	NA553372P	472.50	61
NA12360	85.40	72	NA3560-15	2,415.00	92	NA553379	821.00	62
NA12369	81.90	72	NA39588	90.80	7,105	NA553379-B	689.00	62
NA15006	73.50	97	NA39589	40.00	7,105	NA553662	840.00	62
NA15008	685.00	97	NA39753	54.50	7,15,20,105	NA553669	823.00	62
NA15010	198.50	99,115	NA475022	45.20	24	NA553669-B	691.00	62
NA15012	168.00	98	NA503040	44.60	8	NA553672	955.00	62
NA15014	243.80	99,115	NA51059	74.40	8,72,88	NA553679	937.00	62
NA15015	334.50	99,115	NA51069	95.00	8,72,88	NA553679-B	803.00	62
NA15016	368.60	99,115	NA545305	266.60	19	NA59600	195.50	7,15
NA15017	641.00	99,115	NA545306	306.90	19	NA605010	46.60	30,33,97
NA15018	907.00	99,115	NA545355	318.80	19	NA61241	10.90	31
NA15019	1,361.00	99,115	NA545356	372.80	19	NA669150	42.80	49
NA15020	241.50	97	NA545365	275.00	19	NA669250	42.80	49
NA15021	273.00	97	NA545395	264.60	19	NA79701	685.00	101,114
NA15022	315.00	97	NA545396	292.30	19	NA79702	1,210.00	101,114
NA15023	157.50	100	NA546050T	3,496.00	17	NA79703	1,420.00	101,114
NA15027	84.00	98,100	NA546050TM	4,195.00	17	NA79704	1,735.00	101,114
NA15028	26.30	98,99	NA546060A	4,703.00	17	NA79705	2,500.00	101,114
NA15029	55.70	101,114	NA546060AM	5,644.00	17	NA863042	52.00	106
NA15030	26.30	115	NA546080A	6,057.00	17	NA866027	26.00	106
NA15550	173.70	89	NA546080AM	7,268.00	17	NA866034	37.00	106
NA15559	140.90	89	NA546100A	6,640.00	17	NA866042	57.00	106
NA15560	173.70	89	NA546100AM	7,968.00	17	NAC41626236	126.50	78
NA15569	143.00	89	NA546120A	9,579.00	17	NAC41TT5454	176.50	78
NA15570	59.20	89	NA546120AM	11,494.00	17	NAC623641TT	165.20	78
NA16060	92.00	39	NA546150A	11,687.00	17	NAC6262TT41	142.50	78
NA16069	81.50	39	NA546150AM	14,024.00	17	NAC6263TT41	154.70	78
NA16160	93.00	39	NA546200A	22,023.00	17	NAC62TT6241	142.50	78
NA16169	82.50	39	NA546250A	32,895.00	17	NAC62TT6341	154.70	78
NA16265	26.25	73	NA546300A	42,345.00	17	NAC72TT6241	170.00	78

Code	USD	Page(s)	Code	USD	Page(s)	Code	USD	Page(s)
NAC72TT7241	197.50	78	NAT545641	77.00	78	Z200413	63.70	33
NAL5263	69.80	78	NAT574136	61.30	78	Z200431	58.40	33
NAL5736	53.00	78	NAT623641	70.50	78	Z200432	58.40	33
NAL6262	39.50	78	NAT624136	70.50	78	Z200512	87.40	33
NAL6263	51.70	78	NAT624162	47.80	78	Z200513	87.40	33
NAL6273	84.30	78	NAT626241	47.80	78	Z200515	87.40	33
NAL6363	63.80	78	NAT626262	48.90	78	Z200517	87.40	33
NAL7262	67.00	78	NAT626341	60.00	78	Z200532	76.90	33
NAL7263	79.20	78	NAT626362	61.10	78	Z200533	76.90	33
NAL7273	111.80	78	NAT6263TT	99.80	78	Z200535	76.90	33
NAS10001	280.40	83	NAT62TT63	99.80	78	Z200535	76.90	33
NAS10002	140.70	81,83	NAT634162	60.00	78	Z200537	100.50	33
NAS10005	252.00	81	NAT636262	61.10	78	Z200617	137.90	33
NAS10006	231.00	81	NAT6362TT	99.80	78	Z200635	130.00	33
NAS10007	37.80	81	NAT724162	75.30	78	Z200637	130.00	33
NAS10023	15.80	81	NAT724164	106.60	78	Z200687	87.40	33
NAS10030	78.80	81	NAT724172	111.20	78	Z200737	174.90	33
NAS10032	29.40	81	NAT72TT72	159.00	78	Z207433	82.00	33
NAS10040-1	100.50	81	R11059	5.70	77	Z207533	100.50	33
NAS10040-2	187.10	81	R21180	6.30	85	Z207537	100.50	33
NAS10040-20	415.80	81	R29326	9.35	91	Z300041	84.90	33
NAS10041	16.80	81	R31495	9.10	95	Z300042	84.90	33
NAS10042	10.50	81	R31589	19.50	74,75	Z300043	84.90	33
NAS10406	2,756.00	83	R31706	34.10	77,95	Z300053	102.00	33
NAS10408	3,255.00	83	R31981	13.90	73	Z300411	84.90	33
NAS10410	3,625.00	83	R39204	4.20	53	Z300412	84.90	33
NAS15410	3,625.00	80	R41298/C	4.60	93	Z300413	84.90	33
NAS20025	2,657.00	84,107	R41441	49.20	75	Z300431	79.60	33
NAS20050	3,176.00	84,107	R41447	35.50	7	Z300432	79.60	33
NAS20053	4,043.00	84	R41660	65.20	74	Z300512	106.10	33
NAS20080	3,754.00	84,107	R50005	4.30	75	Z300513	106.10	33
NAS20082	6,064.00	84	R50008	9.00	75	Z300515	106.10	33
NAS20083	5,486.00	84	R50047	17.90	75	Z300517	106.10	33
NAS20120	4,967.00	84,107	R50048	21.80	75	Z300532	98.40	33
NAS20122	7,161.00	84	R50056	3.30	95	Z300533	98.40	33
NAS20123	6,526.00	84	R50057	4.40	74	Z300535	98.40	33
NAS20124	7,392.00	84	R50058	1.80	75,93	Z300617	159.20	33
NAS30020	12,273.00	82	R50060	21.10	74	Z300635	148.40	33
NAS30020-P	8,596.00	82	R50065	4.30	75	Z300637	148.40	33
NAS300201	15,051.00	82	R51838	47.30	74	Z300687	111.00	33
NAS300201P10	16,857.00	82	R53003	38.60	75	Z300737	180.20	33
NAS300201P8	15,983.00	82	R53004	38.60	75	Z307433	103.30	33
NAS30020P10	13,127.00	82	R53005	44.10	75	Z307537	121.90	33
NAS30020P8	12,690.00	82	R56142	2.50	22	Z40	220.30	31
NAS30040	16,384.00	82	R56214	2.60	22,49	Z40F	236.30	31
NAS30040-P	9,907.00	82	R59119	16.00	22	Z42	227.60	31
NAS300401	19,306.00	82	R59681	24.00	22	Z44	204.00	31
NAS300401P10	22,020.00	82	R67032	2.80	95	Z45	222.50	31
NAS300401P8	20,710.00	82	R69413	9.50	49	Z45P	285.50	31
NAS30040P10	18,220.00	82	Z111000	145.60	32	Z46	275.60	31
NAS30040P8	17,346.00	82	Z113000	174.30	32	Z47	320.50	31
NAS30042	16,859.00	82	Z114000	174.30	32	Z50	225.80	31
NAS30042-P	10,453.00	82	Z115000	174.30	32	Z50F	241.80	31
NAS300421	19,852.00	82	Z116000	145.60	32	Z54	209.50	31
NAS300421P10	22,566.00	82	Z121000	134.90	32	Z55	228.00	31
NAS300421P8	21,256.00	82	Z123000	163.70	32	Z55P	291.00	31
NAS30042P10	18,766.00	82	Z124000	163.70	32	Z56	281.10	31
NAS30042P8	17,892.00	82	Z125000	163.70	32	Z57	326.00	31
NAS30060	20,087.00	82	Z126000	134.90	32	ZSR101	160.00	34
NAS30060-P	10,780.00	82	Z131000	159.20	32	ZSR103	375.00	34
NAS300601	23,071.00	82	Z133000	187.80	32	ZSR104	440.00	34
NAS300601P10	27,014.00	82	Z134000	187.80	32	ZSR106	540.00	34
NAS300601P8	25,043.00	82	Z135000	187.80	32	ZVR103	285.00	35
NAS30060P10	22,894.00	82	Z136000	159.20	32	ZVR104	340.00	35
NAS30060P8	21,583.00	82	Z141000	148.50	32	ZVR106	440.00	35
NAS30062	20,562.00	82	Z143000	177.10	32			
NAS30062-P	11,326.00	82	Z144000	177.10	32			
NAS300621	23,617.00	82	Z145000	177.10	32			
NAS300621P10	27,560.00	82	Z146000	148.50	32			
NAS300621P8	25,589.00	82	Z151000	151.10	32			
NAS30062P10	23,440.00	82	Z200041	63.70	33			
NAS30062P8	22,129.00	82	Z200042	63.70	33			
NAT417264	106.60	78	Z200043	63.70	33			
NAT417272	111.20	78	Z200053	82.00	33			
NAT523641	90.50	78	Z200411	63.70	33			
NAT524136	90.50	78	Z200412	63.70	33			

## LIMITED WARRANTY

### Limited Warranty:

Caleffi North America (Caleffi) warrants that all its products sold in accordance with these warranty provisions shall be free from defects in material and workmanship, or other malfunction or failure to perform, under normal use and services. This warranty extends only to persons or organizations that purchase Caleffi products for resale. This warranty is valid for the time listed below from the date of manufacture by product classification listed below:

Standard Components:	2 years
Switching Zone Relays:	3 years
Switching Relay & Valve:	5 years (Z-one™ ZVR series relay and Z-one™ zone valve installed together)
Storage Tank and SolarFlex™:	6 years
Solar Collectors:	10 years

Caleffi's sole obligation hereunder shall be, at its option, to issue credit, repair or replace any component which is proved to be defective. This limited warranty does not cover the cost of transportation or labor charges, including installation and removal, unless such charges are authorized in writing in advance by Caleffi. The solar heat transfer fluid, and maintenance schedule, must be per Caleffi specification. Specifically excluded from this warranty are glass breakage and the effects of frost or acts of God (force majeure) responsible for system or component malfunction.

Caleffi is not responsible for malfunction resulting from any unauthorized alterations made to any Caleffi system components. Caleffi assumes no responsibility for damage to any system component caused by neglect, abuse, faulty installation, misuse, handling or cause not in Caleffi control or not an inherent defect. Caleffi is not liable for consequential damage or expenses, the total liability shall be limited to replacement and repair as stated above.

### Disclaimer of Warranties:

CALEFFI NORTH AMERICA (CALEFFI) DISCLAIMS ANY WARRANTY NOT PROVIDED HEREIN INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IT IS EXPRESSLY UNDERSTOOD THAT CALEFFI IS NOT RESPONSIBLE FOR ANY CONSEQUENTIAL OR OTHER DAMAGES THAT MAY ARISE FROM USING CALEFFI SYSTEM COMPONENTS. DAMAGE RESULTING FROM WATER FREEZING IN THE TUBING DOES NOT CONSTITUTE A DEFECT IN MATERIAL OR WORKMANSHIP, AND SHALL NOT BE COVERED BY THIS WARRANTY.

CALEFFI DISCLAIMS ANY STATUTORY OR IMPLIED WARRANTY OF HABITABILITY. CALEFFI FURTHER DISCLAIMS ANY RESPONSIBILITY FOR LOSSES, EXPENSES, INCONVENIENCES, SPECIAL, INDIRECT, SECONDARY, INCIDENTAL, OR CONSEQUENTIAL DAMAGES ARISING FROM OWNERSHIP OR USE OF THE ARTICLES SOLD HEREUNDER. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE FACE HEREOF.

### Low Lead Notice:

Products identified as "Low Lead" comply with the "Reduction of Lead in Drinking Water Act" a amendment to the "Safe Drinking Water Act" (SDWA) Section 1417. These products can be used in potable water services such as drinking water, hand washing, food service and dish washing.

Products not specifically identified as "Low Lead" are intended for hydronic heating and cooling applications and do not comply with SDWA Section 1417; they cannot be installed in new potable water services.

Form No. 20301/15  
Suggested List Price  
Effective March 1, 2015  
Canceling All Prior Issues  
specifications and prices are subject to change without notice

Caleffi North America, Inc. / 3883 W. Milwaukee Road / Milwaukee, WI 53208  
Tel: 414.238.2360 / Fax: 414.238.2366  
[www.caleffi.com](http://www.caleffi.com) / [orders.us@caleffi.com](mailto:orders.us@caleffi.com)  
©Copyright 2015 Caleffi North America, Inc