

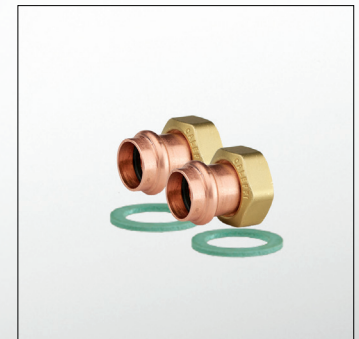





PRESSCON™ UNION TAILPIECE

PRESSCON SERIES

CALEFFI
Hydronic Solutions

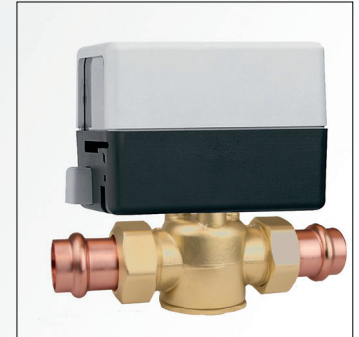

FUNCTIONS AND FEATURES

- Pressco™ copper tail-piece with union nut makes installation and maintenance of Caleffi components fast, easy and efficient.
- Special slots in EPDM O-ring allows fluid to leak during system testing if unpressed and the perfect leak proof seal when completely pressed.
- Pressco™ copper tail-piece union is available in size ¾" C X 1" Female union nut which fits many components with 1" male union (straight) thread.
- Temperature range of 0°F—250°F with pressure rating to 200 psi, meets 2014 low lead law requirements.



Z-one™ 2-way

Motorized zone valve

Code	Description	Cv	Δ P	Pk	Lbs	USD
Z45P	¾" press*	7.5	20 psi	10	22	271.90
Z55P	¾" press**	7.5	20 psi	10	22	277.10


Two ¾" Presscon™ fittings (NA16265) included.

*18" wire lead connection.

**Screw terminal connection.



6763



6762

Thermo-electric zone valves

Code	Description	Cv	Pk	Lbs	USD
676356A	¾" press	4.0	5	9.3	203.50
676256A	¾" press	4.0	5	9.3	236.00



NA5453 DIRTMAG®

Magnetic dirt separator

Code	Description	Pk	Lbs	USD
NA545365	¾" press	1	4.5	305.60

PRICES SHOWN ARE SUGGESTED RETAIL LIST PRICE

REFERENCE DOCUMENTATION: TECHNICAL BROCHURES




Two ¾" Presscon™ copper press tail pieces with 1" brass union nuts and washers for use with 2-way 1" male union valve body (Z200687).

Code	Description	Pk	Lbs	USD
NA12256	¾" press with 1" union nut	1	4.0	50.00



Three ¾" Presscon™ copper press tail pieces with 1" brass union nuts and washers for use with 3-way 1" male union valve body (Z300687).

Code	Description	Pk	Lbs	USD
NA12356	¾" press with 1" union nut	1	4.0	75.00



519

Differential pressure by-pass valve

Code	Description	Pk	Lbs	USD
519566A	¾" press x ¾" press	1	1.0	169.70



5350 AutoFill

Automatic filling valve™

Code	Description	Pk	Lbs	USD
535056A	¾" press	1	2.3	243.60



CALEFFI
Hydronic Solutions

03XX-14.1NA