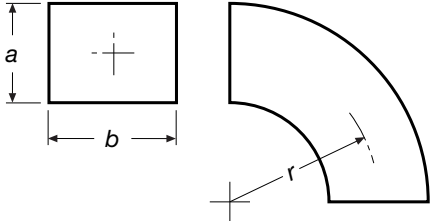
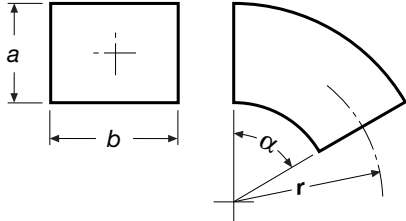
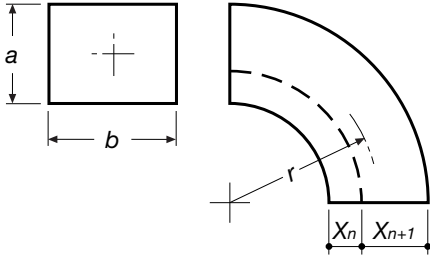
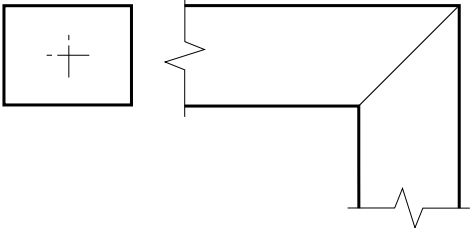
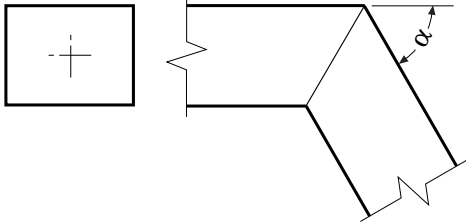
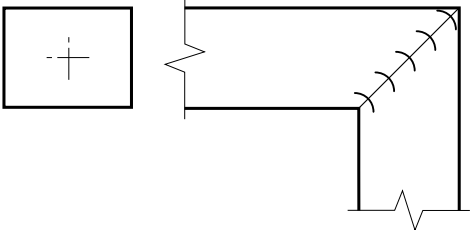
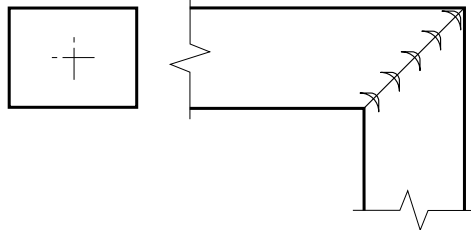
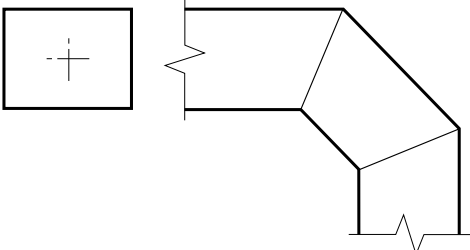
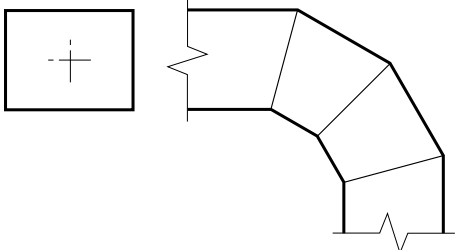


# Conduites rectangulaires – valeurs indicatives des coefficients $\xi$ - coudes

<p style="text-align: center;"><b>Coude à 90°</b></p>  <table border="1" data-bbox="734 272 1017 500"> <thead> <tr> <th rowspan="2">r/a</th> <th colspan="2"><math>\xi</math></th> </tr> <tr> <th>b/a ≤ 1</th> <th>b/a ≥ 1</th> </tr> </thead> <tbody> <tr> <td>0,50</td> <td>1,2</td> <td>1,0</td> </tr> <tr> <td>0,75</td> <td>0,6</td> <td>0,4</td> </tr> <tr> <td>1,00</td> <td>0,3</td> <td>0,2</td> </tr> <tr> <td>1,50</td> <td>0,1</td> <td>0,1</td> </tr> </tbody> </table>	r/a	$\xi$		b/a ≤ 1	b/a ≥ 1	0,50	1,2	1,0	0,75	0,6	0,4	1,00	0,3	0,2	1,50	0,1	0,1	<p style="text-align: center;"><b>Coude à 30°, 45° et 60°</b></p>  <table border="1" data-bbox="1613 293 1953 485"> <thead> <tr> <th></th> <th><math>\xi</math></th> </tr> </thead> <tbody> <tr> <td><math>\alpha = 30^\circ</math></td> <td><math>\xi = \xi_{(90^\circ)} \cdot 0,33</math></td> </tr> <tr> <td><math>\alpha = 45^\circ</math></td> <td><math>\xi = \xi_{(90^\circ)} \cdot 0,50</math></td> </tr> <tr> <td><math>\alpha = 60^\circ</math></td> <td><math>\xi = \xi_{(90^\circ)} \cdot 0,66</math></td> </tr> </tbody> </table>		$\xi$	$\alpha = 30^\circ$	$\xi = \xi_{(90^\circ)} \cdot 0,33$	$\alpha = 45^\circ$	$\xi = \xi_{(90^\circ)} \cdot 0,50$	$\alpha = 60^\circ$	$\xi = \xi_{(90^\circ)} \cdot 0,66$									
r/a		$\xi$																																	
	b/a ≤ 1	b/a ≥ 1																																	
0,50	1,2	1,0																																	
0,75	0,6	0,4																																	
1,00	0,3	0,2																																	
1,50	0,1	0,1																																	
	$\xi$																																		
$\alpha = 30^\circ$	$\xi = \xi_{(90^\circ)} \cdot 0,33$																																		
$\alpha = 45^\circ$	$\xi = \xi_{(90^\circ)} \cdot 0,50$																																		
$\alpha = 60^\circ$	$\xi = \xi_{(90^\circ)} \cdot 0,66$																																		
<p style="text-align: center;"><b>Coude à 90° avec déflecteur</b></p>  <table border="1" data-bbox="919 621 1464 791"> <thead> <tr> <th>a</th> <th>N</th> <th>X<sub>1</sub></th> <th>X<sub>2</sub></th> <th>X<sub>3</sub></th> <th>X<sub>4</sub></th> </tr> </thead> <tbody> <tr> <td>300 ÷ 500</td> <td>1</td> <td>1/3a</td> <td>2/3a</td> <td></td> <td></td> </tr> <tr> <td>500 ÷ 1.000</td> <td>2</td> <td>1/6a</td> <td>1/3a</td> <td>1/2a</td> <td></td> </tr> <tr> <td>&gt; 1.000</td> <td>3</td> <td>1/12a</td> <td>1/6a</td> <td>1/4a</td> <td>1/2a</td> </tr> </tbody> </table> <p style="text-align: right;"> <table border="1" data-bbox="1698 621 1840 825"> <thead> <tr> <th>r/a</th> <th><math>\xi</math></th> </tr> </thead> <tbody> <tr> <td>0,50</td> <td>0,5</td> </tr> <tr> <td>0,75</td> <td>0,2</td> </tr> <tr> <td>1,00</td> <td>0,1</td> </tr> <tr> <td>1,50</td> <td>0,1</td> </tr> </tbody> </table> </p> <p><i>a</i> = hauteur section conduite  <i>N</i> = nombre de déflecteurs  <i>X<sub>n</sub></i> = distance des différents passages d'air</p>	a	N	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	300 ÷ 500	1	1/3a	2/3a			500 ÷ 1.000	2	1/6a	1/3a	1/2a		> 1.000	3	1/12a	1/6a	1/4a	1/2a	r/a	$\xi$	0,50	0,5	0,75	0,2	1,00	0,1	1,50	0,1	
a	N	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>																														
300 ÷ 500	1	1/3a	2/3a																																
500 ÷ 1.000	2	1/6a	1/3a	1/2a																															
> 1.000	3	1/12a	1/6a	1/4a	1/2a																														
r/a	$\xi$																																		
0,50	0,5																																		
0,75	0,2																																		
1,00	0,1																																		
1,50	0,1																																		
<p style="text-align: center;"><b>Coude 90° à angle vif</b></p>  <p style="text-align: center;"><math>\xi = 1,4</math></p>	<p style="text-align: center;"><b>Coude 30°, 45° et 60° à angle vif</b></p>  <table border="1" data-bbox="1698 1032 1953 1144"> <thead> <tr> <th colspan="3"><math>\xi</math></th> </tr> <tr> <th><math>\alpha = 30^\circ</math></th> <th><math>\alpha = 45^\circ</math></th> <th><math>\alpha = 60^\circ</math></th> </tr> </thead> <tbody> <tr> <td>0,5</td> <td>0,7</td> <td>0,9</td> </tr> </tbody> </table>	$\xi$			$\alpha = 30^\circ$	$\alpha = 45^\circ$	$\alpha = 60^\circ$	0,5	0,7	0,9																									
$\xi$																																			
$\alpha = 30^\circ$	$\alpha = 45^\circ$	$\alpha = 60^\circ$																																	
0,5	0,7	0,9																																	
<p style="text-align: center;"><b>Coudes 90° avec déflecteurs classiques</b></p>  <p style="text-align: center;"><math>\xi = 0,4</math></p>	<p style="text-align: center;"><b>Coudes 90° avec déflecteurs aérodynamiques</b></p>  <p style="text-align: center;"><math>\xi = 0,2</math></p>																																		
<p style="text-align: center;"><b>Coude 90° à un segment</b></p>  <p style="text-align: center;"><math>\xi = 1,3</math></p>	<p style="text-align: center;"><b>Coude 90° à deux segments</b></p>  <p style="text-align: center;"><math>\xi = 1,2</math></p>																																		