



Wall mounted direct heat interface units

SATK22 series

www.caleffi.com



PATENT PENDING

With advanced electronic functions

- Complete range for low, medium and high temperature systems.
- Remote user interface with chronothermostat function.
- Compact size, simple installation, use and maintenance.
- Control of the return temperature in both heating and DHW mode. Ideal for condensing boilers and district heating applications.
- Instantaneous DHW production with DHW heat exchanger weekly programmable preheating function.
- Self-diagnostics and remote control via MODBUS.



CALEFFI
Hydronic Solutions

PRODUCT RANGE




CODE	HEATING TEMP. RANGE	DHW HEAT EXCHANGER
SATK22 103	25–45°C	A
SATK22 105	25–45°C	B
SATK22 203	45–75°C	A
SATK22 205	45–75°C	B
SATK22 303	max 90°C	A
SATK22 305	max 90°C	B
SATK22 403*	max 90°C	A
SATK22 405*	max 90°C	B

(*) with primary pump

CODE	OPTIONAL
789 023	First fix jig


USER INTERFACE

Characteristic functions

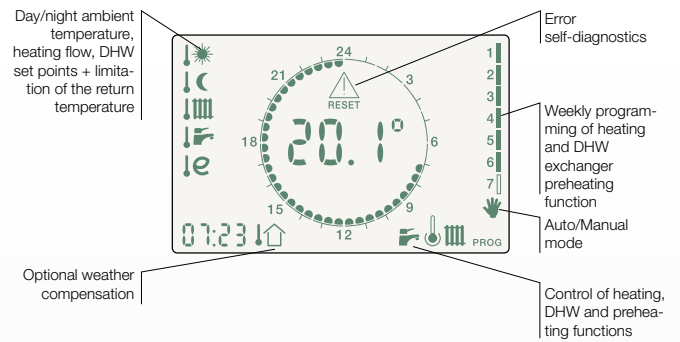


Remote installation

The user interface can work as a chronothermostat when the function is enabled.

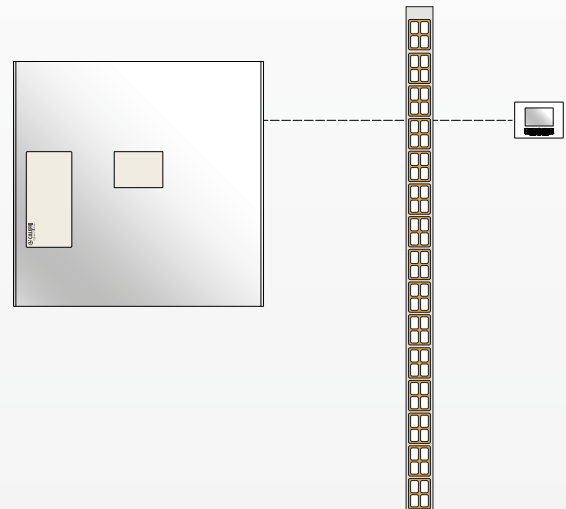

On the HIU

When left on the HIU the room temperature control function can be disabled.

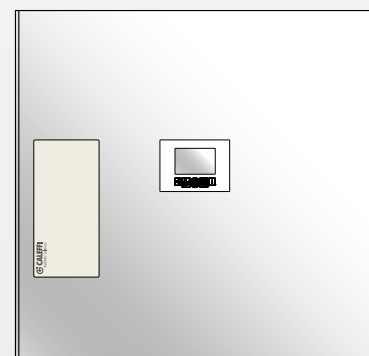

DHW HEAT EXCHANGER PERFORMANCE

Heat exchanger A – performance table (DHW 10–48°C)

Power	DHW flow rate	PRIMARY flow return temp.	PRIMARY flow rate
35 kW	13,2 l/min	60–29°C	970 l/h
35 kW	13,2 l/min	70–24°C	620 l/h
50 kW	18,8 l/min	70–27°C	1000 l/h

Heat exchanger B – performance table (DHW 10–48°C)

Power	DHW flow rate	PRIMARY flow-return temp.	PRIMARY flow rate
35 kW	13,2 l/min	55–28°C	790 l/h
35 kW	13,2 l/min	60–24°C	830 l/h
50 kW	18,8 l/min	70–22°C	890 l/h
60 kW	22,7 l/min	70–23°C	1100 l/h

REFERENCE DOCUMENTATION:

SATK22 series

- Tech. brochure 01309

CALEFFI
Hydronic Solutions

0361219GB

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi S.p.A. S.R. 229 n. 25 · 28010 Fontaneto d'Agogna (NO) · Italy
Tel. +39 0322 8491 · Fax +39 0322 863723
info@caleffi.com · www.caleffi.com · © Copyright 2019 Caleffi